SCIENTIFIC AMERICAN

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. XXXV.--No. 19. [NEW SERIES.] NEW YORK, NOVEMBER 4, 1876. [$3.20 per Annum. [POSTAGE PREPAID.

CURIOUS BOATS AT THE CENTENNIAL EXPOSITION.

There is no one class of exhibits at the Centennial Exposition more completely represented, and yet more widely scattered, than that which includes vessels and boats of all kinds. There is a superb collection of models of men of war, fishing craft, and small boats in the United States Building. In Machinery Hall, there are elaborate models of ocean steamers, ironclads, race boats, ice boats, canoes, and the admirable exhibit of the Massachusetts Marine, which includes vessels of every conceivable description, from skiffs to fast sailing clippers. In an out-of-the-way corner of one of the mineral annexes of the Main Building, a curious display of Chinese junks may be found; interspersed through all the foreign departments are models of the vessels peculiar to the different countries. In the Agricultural Building, there is another collection of fishing boats, a large portion of which is in the Norwegian section: and thus,

Continued on page 292.

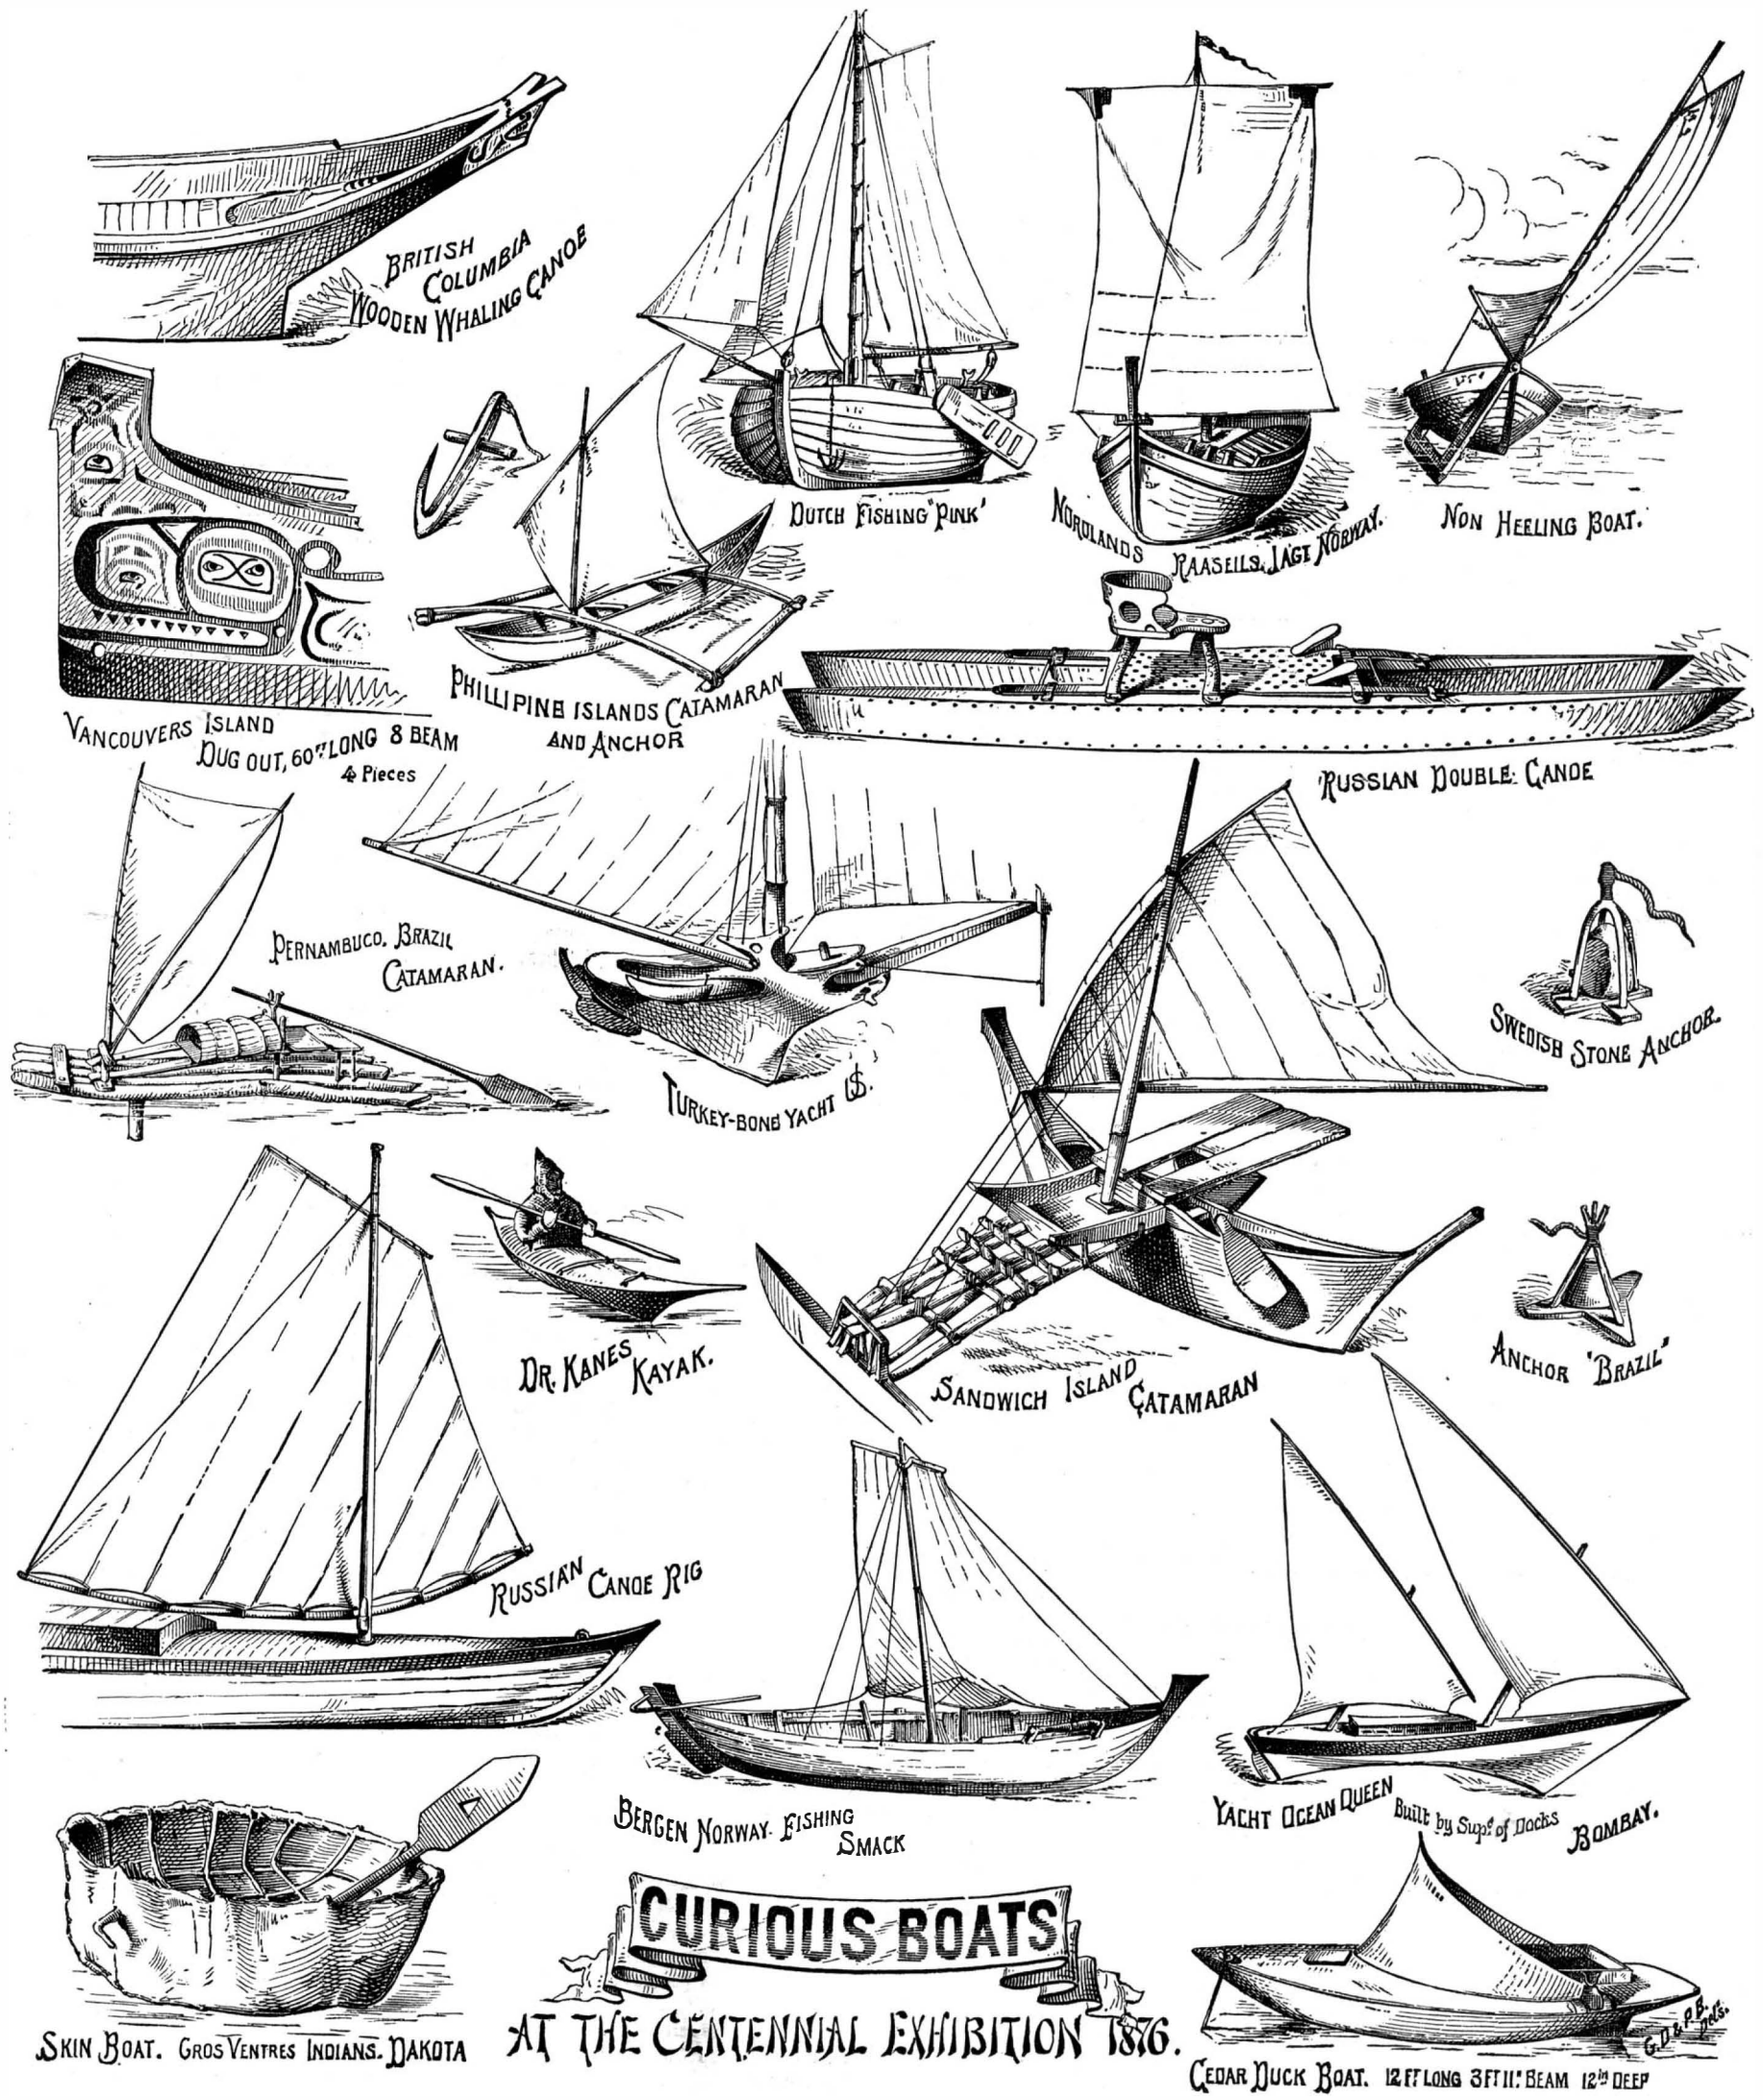
BRITISH COLUMBIA WOODEN WHALING CANOE
DUTCH FISHING "PINK"
NORDLANDS RAASEILS. IAGT NORWAY.
NON HEELING BOAT.
VANCOUVERS ISLAND DUG OUT, 60" LONG 8 BEAM 4 Pieces
PHILLIPINE ISLANDS CATAMARAN AND ANCHOR
RUSSIAN DOUBLE CANOE
PERNAMBUCO, BRAZIL CATAMARAN.
TURKEY-BONE YACHT $.
SWEDISH STONE ANCHOR.
DR. KANES KAYAK.
SANDWICH ISLAND CATAMARAN
ANCHOR "BRAZIL"
RUSSIAN CANOE RIG
BERGEN NORWAY. FISHING SMACK
YACHT OCEAN QUEEN Built by Supt of Docks BOMBAY.
SKIN BOAT. GROS VENTRES INDIANS. DAKOTA
CEDAR DUCK BOAT. 12 FT LONG 3 FT 11" BEAM 12" DEEP

CURIOUS BOATS AT THE CENTENNIAL EXHIBITION 1876.

© 1876 SCIENTIFIC AMERICAN, INC.

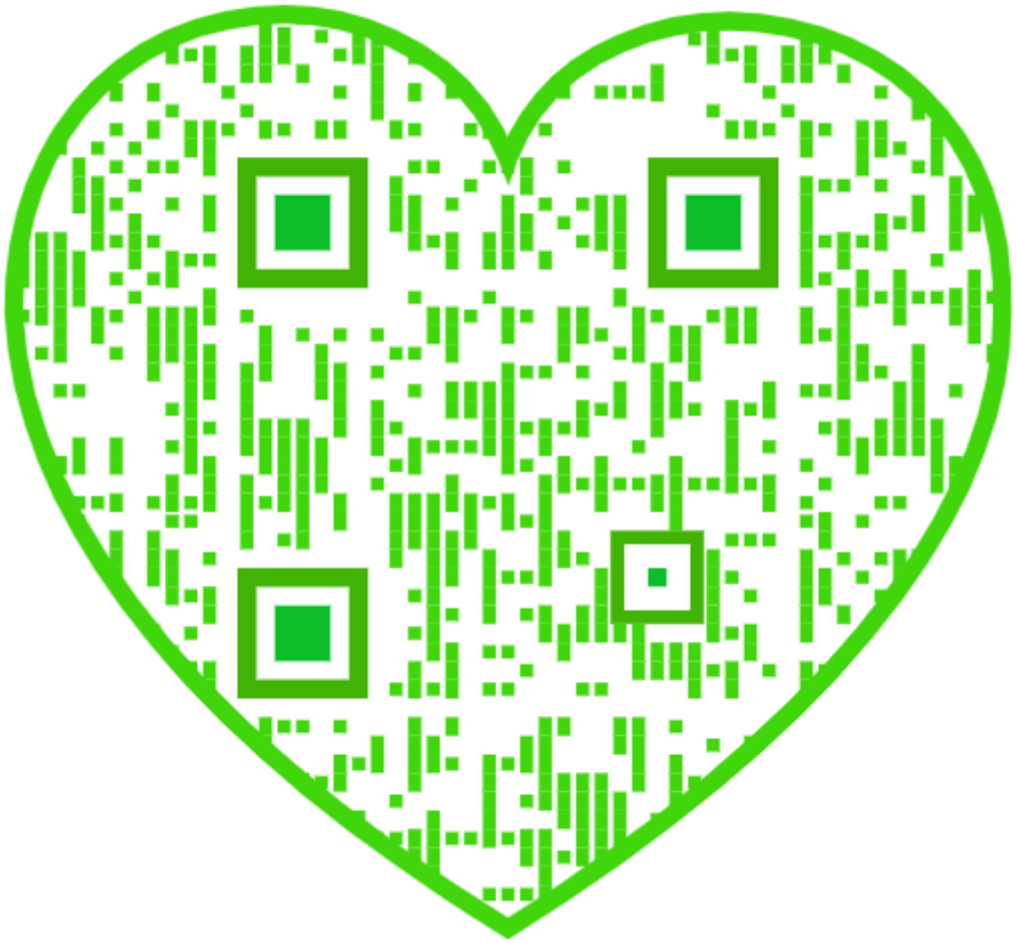

Scientific American.

ESTABLISHED 1846.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT
NO. 37 PARK ROW, NEW YORK.

O. D. MUNN. A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year. postage included.....$3 20
One copy, six months, postage included..... 1 60

Club Rates.

Ten copies, one year, each $2 70, postage included.....$27 00
Over ten copies, same rate each, postage included..... 2 70

☞ The postage is payable in advance by the publishers, and the subscriber then receives the paper free of charge.

NOTE.—Persons subscribing will please to give their full names, and Post Office and State address, plainly written. In case of changing residence state former address, as well as give the new one. No changes can be made unless the former address is given.

Scientific American Supplement.

A distinct paper from the SCIENTIFIC AMERICAN, but of the same size and published simultaneously with the regular edition.

TERMS.

One year by mail.....$5 00
SCIENTIFIC AMERICAN and SUPPLEMENT, to one address..... 7 00
Single Copies..... 10

The safest way to remit is by draft, postal order, or registered letter.

Address MUNN & Co., 37 Park Row, N. Y.

☞ Subscriptions received and single copies of either paper sold by all the news agents.

VOLUME XXXV., No. 19, [NEW SERIES.] *Thirty-first Year.*

NEW YORK, SATURDAY, NOVEMBER 4, 1876.

Contents.

(Illustrated articles are marked with an asterisk.)

Academy of Sciences..... 289
Alcohol, new test for..... 289
Answers to correspondents..... 299
Ants, to exterminate..... 294
Apple, curious..... 293
Arms for Russia..... 297
Astronomical notes..... 297
Atoms and molecules, sizes of, etc. 293
Australian gum tree..... 297
Bell, note of a (21)..... 299
Belts, large..... 292
Boat, a canvas (20)..... 299
Boats at the Centennial*..... 287
Boats, speed of (24)..... 300
Boiler consumption of water (6).. 299
Boilers for small engines (13)..... 299
Boilers, pressure in (22)..... 299
Bread making, aerated..... 294
Bridge cable, the East river..... 293
Bugs or hemiptera, the*..... 295
Burbot, the*..... 295
Business and personal..... 299
Canaries, training..... 291
Catamaran, the (18)..... 299
Cat's eye, the..... 293
Centennial awards, the..... 290
Centennial, attendance at the..... 294
Centennial, boats at the*..... 287
Centennial, minerals at the..... 296
Centennial main building, the.... 293
Centennial notes*..... 297
Chair and secretary*..... 294
Climbers and shade..... 291
Coffee as a disinfectant (28)..... 300
Cold spells (2)..... 299
Curculios, to dispose of..... 299
Dispute, how to settle a..... 290
Electric circuits (4)..... 299
England's dilemma..... 291
Eyes, nearsighted (15)..... 299
Fire on the hearth..... 289
Floors, vibrating (12)..... 299
Fuse, explosion (3)..... 299
Germany at the Centennial..... 297
Governors, effective engine..... 292
Heating and ventilation (2)..... 299
Hemiptera or bugs, the*..... 295
Huxley, Prof., and Dr. Taylor.... 288
Hygeia, the model city..... 295
Incubator, leviathan*..... 297
Inks, chromic..... 293
Iron and steel, improvements in.. 288
Iron rust as a cause of fire..... 293
Iron, strength of, etc. (19)..... 299
Labor, some thoughts on..... 288
Lathe work, cutting speeds for... 292
Light and colors (16)..... 299
Loggers, how they live..... 290
Machine for making men honest.. 290
Magnets for lifting weights (8).... 299
Magnets, winding (9)..... 299
Minerals at the Centennial..... 296
Mouse plague, a..... 294
Nitroglycerin, shipping..... 298
Nut trees, raising..... 293
Paste, to make (6)..... 299
Patent law reform in England.... 298
Patents, American and foreign... 298
Patents, official list of..... 300
Pentatoma grisea, the*..... 295
Petroleum, electricity, and light. 289
Polishing tool handles (1)..... 299
Porous cells, plaster (27)..... 300
Powers, fractional (16)..... 299
Pumping water from a distance (6) 299
Red wash for brickwork..... 291
Rudder, new jury*..... 297
Saw teeth, inserted*..... 294
Scale from steel, removing (25)... 300
Screw-cutting lathe*..... 291
Silk, twisting (16)..... 299
Sound, the travel of (23)..... 299
Spiritualists' facts and real facts.. 283
Steam, cutting by (7)..... 299
Steam pipes, covering (17)..... 299
Steam, using exhaust..... 289
Stopcock and street washer*..... 290
Taylor, Dr., vs. Professor Huxley 288
Telegraph circuits (10)..... 299
Turbine wheels, testing (14)..... 299
Venus, the transit of (5)..... 299
Water engine, new*..... 290
Water, lime salts in (26)..... 300
Waters, treating hard..... 293
Wells, artesian, power from..... 293
Wood carpeting and inlaid floors* 291

THE SCIENTIFIC AMERICAN SUPPLEMENT.

Vol. II., No. 45.

For the Week ending November 4, 1876.

TABLE OF CONTENTS.

I. THE INTERNATIONAL EXHIBITION OF 1876. With 20 figures.—Exhibits of Steam Boilers, with 7 figures.—The Exeter Boiler, Harrison Boiler, Babcock & Wilcox Boiler, Anderson Boiler, Firminich Boiler.—The Sickels Steam Cut-Off.—Exhibits of the Stephens Institute of Technology, with 10 illustrations, namely, Linear Dividing Engine, Gontometer, Vertical Lanterns for Screens, Autographic Testing Machine, Oil Tester, Dynamometer, Measuring Instrument for Water Streams, Large Spectroscope, Resonator, Stevens Historical Steamboat Engine.—Ramsey's Car Truck Shifter, 3 figures.

II. ENGINEERING AND MECHANICS.—The Early Steam Engines of the United States, with two pages of engravings, showing the first Engines of the Philadelphia Water Works and their Wooden Steam Boilers, Construction, etc.—Compressed Air Motors, using Air at 1,500 lbs. per inch.—The Morse Alphabet for Naval Signalling.—Opening of the First Railway in China, 1 engraving.—Locomotive Tests, Boston and Albany Railway.—Strength and Fracture of Cast Iron.—Strength of Concrete.—The Stobcross Docks.—Spring Fenders for Pier Heads.—Manufacture of Fire Bricks.—The Haswell System of Pressure Forging, by J. O. BUTLER.—Manufacture of Planished Straight Round Bars, by EDMUND BUTLER.—Manufacture of Glass in Connection with Blast Furnaces, by B. BRITTEN.—The Longest Bridge in the World.—Improvement in Hot Blast Stoves, with 3 figures.—Improved Ore Furnace, 1 figure.—Canfield's Mineral Dresser, 1 figure.—Machine for Beveling Circular Plates, 2 figures.—New Lubricator, 1 figure.—Novelty in Toothed Gearing, 1 figure.—Baxter's Automatic Grain-Weighing Machine, 1 figure.—New Machine for Drying Grain, 2 figures.—The Atlantic Steam Fleet.

III. TECHNOLOGY.—How to make Aniline Black Inks.—How to make Copying Inks.—How to make Powder and Tablet Inks.—Process for New Colors.—Ornamental Silver Lamp Pendant, 1 engraving.—Phosphor-Bronze, its Various Uses and Value in the Arts.

IV. LESSONS IN MECHANICAL DRAWING, by Professor MACCORD; No. 25. One and a half pages of illustrations.

V. CHEMISTRY AND METALLURGY.—Detection of Artificial Coloration in Wines.—New Process for the Estimation of Potassa, by M. A. CARNOT.—Method of Ascertaining Copper in Cast Iron.

VI. AGRICULTURE. HORTICULTURE, ETC.—Value of Carrots for Horses and Cattle.—Temperature in Relation to the Growth of Plants.—Grape Management and Pruning.—How to Grow Ferns in Cases.

VII. MISCELLANEOUS.—Historical Treasures in the Scientific Loan Collection Exhibition, London, 8 engravings, namely: Parent Engine of Steam Navigation; Newcomen's Steam Engine; The Comet, the first Steamboat on the Clyde, 3 figures; Original Engine of the Comet; The Locomotive "Puffing Billy;" Von Guerike's Air Pump.—The Corona Line in the Solar Spectrum.—Vitreous Rocks.—Examination of Sea Bottom from Balloons.—Weather Insurance.

The Scientific American Supplement

is a distinctive publication issued weekly; every number contains 16 octavo pages, with handsome cover, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, $5.00 a year, postage paid, to subscribers. Single copies, 10 cents. Sold by all news dealers throughout the country.

All the numbers of the SUPPLEMENT from its commencement, January 1, 1876, can be supplied; subscriptions date with No. 1 unless otherwise ordered.

MUNN & CO., PUBLISHERS,
37 Park Row, New York.

☞ Single copies of any desired number of the SUPPLEMENT sent to any address on receipt of 10 cents.

DR. TAYLOR VS. PROFESSOR HUXLEY.

As a rule, it is a waste of time to pay any attention to the excursions of any man into unfamiliar fields of knowledge, however great his reputation for learning may be in other directions. A man may be an authority in Hebrew history, yet densely ignorant of the events of mediæval Europe. He may be chief among chemists, yet a beginner in biology, and entirely out of his element in mechanics. When such a specialist attempts to settle questions in departments other than his own, he is pretty sure to accomplish little else than the exposure of his own lack of knowledge. Even more certain to go wrong is the man who ventures into a field of knowledge in which the means and methods of study, the kind of evidence, the spirit of investigation, and the purpose of the work are each and all unlike those he is used to. The mental habits of the trained theologian, for example, are quite the reverse of those of the trained scientist. The one proceeds, calmly, dispassionately, and sensibly, to investigate actual existences, conditions, relations, and occurrences. The result may be more or less advantageous to him and to his fellows; but he is not personally responsible for it, whatever it may be, since no one can justly blame or punish him, here or hereafter, for finding things as they are. The theologian, on the contrary, deals with matters of emotion, aspiration, fancy. His materials are ever varying feelings and equally unstable imaginations. His things are words, often from languages vaguely understood, or technical phrases concerning the import of which there is no agreement. And the issues at stake are of transcendent importance—infinite felicity or eternal woe to such as assent or deny. To him authority, human or divine, is everything: tradition is almost omnipotent, and the penalty of independent thought is excommunication, the alienation of friends and associates, and, mayhap, personal damnation. And he naturally carries with him the same habits of thought, the same incapacity for unprejudiced and impartial investigation of realities, the same inability to appreciate the logic of facts, whenever he enters the scientific field as a self-elected umpire or dictator. Consequently his utterances therein are pretty certain to be valuable only as so many additions to the already over-abundant supply of illustrations of learned foolishness and of the uselessness of metaphysical methods for the advancement of real knowledge.

These remarks have been suggested by the labored attempt of the Rev. Dr. W. M. Taylor to break the force of Professor Huxley's lectures on evolution. Dr. Taylor is a gentleman of considerable eminence in the theological world: but that only makes the more ludicrous his Quixotic attack upon a purely imaginary Professor Huxley, in the course of which he exhibits an utter misapprehension of the scope and purpose of the real professor's remarks, and the most thorough-going ignorance of the range, amount, and quality of the evidence bearing on the question of evolution.

He is off the track from the start, assuming that Professor Huxley pretended to give a demonstration of the hypothesis of evolution, and that his lectures contained all the evidence to be produced in its support. The single fact that Professor Huxley promised no more than a popular illustration of certain lines of evidence bearing more or less distinctly and forcibly upon the hypothesis of evolution, and directly declared that it was no part of his purpose to enable any one to pronounce upon the truth or falsity of the doctrine, sufficiently proves the irrelevancy of four fifths of the pretended criticism. Professor Huxley did not promise nor attempt to "demonstrate" evolution, but merely to indicate the kind of historical evidence the theory demanded, and how geology was meeting the demand. To have recited all the evidence of this sort in the possession of Science would have required weeks or months instead of hours; while the evidence derived from existing conditions and relations in the world of animal and vegetable life would require an allowance of time not less liberal.

The remaining fifth of the two columns of the *Tribune*, which Dr. Taylor devotes to the destruction of the theory of evolution as Professor Huxley did not present it, comprises a curious array of misstatements, misconceptions, and absurdities, which we should like to traverse at length, but can merely sample for lack of space. No better evidence could be asked of the reverend doctor's incapacity for the task he has undertaken than is found in the following assertion, which may be a misapprehension, but certainly is a misstatement of the most ridiculous character. He says: "He (Professor Huxley) allows that species are persistent, and that there is little or nothing in the geologic records that sustains his position!"

After that, the reader will not be surprised at the assumption that the diversity of interpretation, "marvelous flexibility," etc., of Genesis is confined to the meaning of the word *day*: or that Professor Huxley craftily avoided the "fourth hypothesis" of creation—that is, creation in series, or successive creations in time—in spite of his positive exclusion of that view as unworthy of attention, it being unsupported by evidence of any kind, either scientific or scriptural.

But all these are as nothing, compared with the triumphantly funny demand: "If evolution rests on a basis as sure as astronomy, why do we not see one species passing into another now, even as we see the motions of the planets through the heavens? Why cannot its votaries foretell that, at a certain time and in a certain place, not too far from personal inspection by us, some modification in the structure of an animal or a plant shall occur, without any human intervention, even as astronomers predict the occurrence of a transit of Venus across the sun?"

Yet the man who is capable of perpetrating such a grand absurdity—absurd in what it asks, as well as in what it denies—really believes himself competent to pass upon a problem involving a vast amount of natural knowledge and no small degree of natural intelligence. And doubtless there are not a few who will accept his flourish of misplaced logic as conclusive against evolution, and rejoice with him that Professor Huxley's "imposition" has thereby been nailed to the counter "that it may not get into currency."

IRON AND STEEL WORKING IMPROVEMENTS.

We give in our this week's SUPPLEMENT a full abstract of a recent paper read before the Iron and Steel Institute, at Leeds, England, on the Haswell system of forging iron by hydraulic pressure, by Mr. J. O. Butler, and of the interesting discussion which followed. Much valuable practical information concerning iron forging was elicited. Among the speakers was Sir Joseph Whitworth, who gave some remarkable particulars concerning his operations in compressing molten steel. He stated, among other things, that he had lately completed a pair of steel screw shafts for the ship Inflexible. They were 283 feet long, weight 63 tuns. A weight of 97 tuns would, ordinarily, have been required; but by the compression of the molten steel, a saving in weight had been effected of 34 tuns. In practice the fluid steel is subjected in the mold to a pressure of six tuns, or 12,000 lbs., to the square inch.

This week's SUPPLEMENT also contains abstracts of papers, read before the Institute, on the "Straightening and Planishing of Round Bars," a process by which the scale, instead of being rolled in, is removed, and a smooth, clean surface produced, the bars being as finished and straight as if turned in a lathe.

Also an interesting paper on the "Utilization of Blast Furnace Slag, with its Heat, for the Manufacture of Glass." It appears from this paper that, by the addition of a few simple chemicals and apparatus, it is practicable to connect the profitable manufacture of glass with iron furnaces without in any manner interfering with the usual continuous operations of the blast furnace: the heat now lost being successfully applied to the production of the glass.

SOME THOUGHTS ON LABOR.

We have recently perused with much interest a little work entitled "Talks about Labor," written in a pleasant colloquial strain by Mr. J. N. Larned, of Buffalo, N. Y., in which the labor question is dealt with, in some respects, in a novel manner. The writer's main point is that political economy alone is not capable of dealing with the labor question, that the relations of capital and labor cannot be adjusted by abstract theorizing, but that the problem is constantly complicated by human needs, misfortunes, and passions, which must be considered. "We eke out now," he says, "a tyrannical and heartless theoretic economy with practical charities and generosities which make it tolerable. The change to be brought about is this: that we must reduce the generosity to a system, not of generosity but of justice in right." This, in the main, is but another form of expression for the counsels of moderation and regard for the rights of others that we have hitherto offered in considering cases of labor troubles; for we have long been persuaded that an equitable and permanent adjustment of the difficulties existing between employers and employed is to be reached, not by measures of coercion between the contending parties, or by like heroic treatment, but through the slow but sure judgment of society, brought about through the perception of the mean to which moderate action and opinion on both sides must approximate.

We cannot here follow the author through the various arguments which spring from the above proposition, and therefore at once pass to the remedy which he thinks likely to be most effectual against the strikes and lock-outs of the future. And this is a kind of limited coöperation between employers and employed, in which a system of dividends out of the profits is introduced to supplement the wages system. Then, it is urged, the working classes would begin to observe and apprehend the phenomena of the market out of which the laws of industrial economy are derived, and consequently would be inspired, from personal motives, to act in coöperation with the managers of capital. The idea so far is not new; and while we are by no means prepared to assert that it may not be practicable, past experience furnishes many instances of unsatisfactory results in its working. It was introduced in England by Messrs. Briggs & Son, of the Whitwood collieries, in 1865. This firm organized a limited company, and the men were made partners in the prosperity of the concern to a certain fair extent. The project met with the warmest favor from such men as John Stuart Mill and Thomas Hughes, but the workmen were dissatisfied with their gains, and it fell through. Samuel Smiles, in a recent work, says that the firms of Greening & Co., Manchester, and Fox, Head & Co., of Middlesborough, in the iron trade, also admitted their men to partnerships in profits. The latter firm started on this plan in 1866, and after nine years' trial the system was abandoned, last year. Sir Joseph Whitworth has announced his intention of testing the scheme, but his results, if any, are not known to us. Generally, however, so long as profits are large the men are contented; but when the market falls and gains are reduced, then the aggregate returns are still expected to remain at former figures. In the case of Fox, Head & Co., the unions kept forcing wages higher as profits decreased, until finally a successful demand for twenty per cent increase resulted in the abandonment of the plan.

Not long ago, a case came under our immediate observation where the men in a large factory deliberately forfeited a dividend, amounting to some ten per cent of the profits of a considerable period, and due within a few days, in order to

© 1876 SCIENTIFIC AMERICAN, INC.

join their craft in a strike. Their action, as it was evident would be the case, resulted in failure, and they returned to work at the old wages *minus* any share in profits whatever.

Perhaps, however, if we couple with the coöperative plan the reforms which, the author points out, might be made among the trades' unions, the attainment of the desired result would be more probable. Mr. Larned's picture of the trades' unions of the future is an agreeable one They might "take upon themselves the responsible guardianship of all the interests of the mechanic industries, each its own, fixing and maintaining a high standard of workmanship for every trade, graduating the mechanics in their several arts, and conferring diplomas and degrees as the colleges do, with such strictness and fairness that the classification of the union or guild would be recognized in the labor market: opening their doors to all new comers widely, without any bars except such as these standards of proficiency will set up, and aiming to individualize—not generalize—the compensation of labor in each department of work by individualizing the labor itself: looking always to the efficiency, the skill, the productive value of each man's work for the basis of the apportionment of dividends to him from the production to which he contributes." If this, we fear Utopian, outlook could be realized, that the trades' unions would become "institutions of splendid usefulness," there is no room for doubt.

One portion of Mr. Larned's work which will be read with especial interest is an excellent showing of the enormously increased and increasing productiveness of labor through the progress of invention of labor-saving machinery. From statistical data gathered by Dr. Engel, of the Prussian Statistical Bureau, relative to the aggregate steam power in use in the world, there are some 3½ millions horse power employed in stationary engines, and 10 millions in locomotive engines. All this is maintained without the consumption of animal food except to the extent of the food of the miners who dig the coals; and the force maintained in their muscles is to the force generated by the product of their labor as 1 to 1,000 at most. This steam labor force is equal to the working force of 25 million horses, the theoretical horse power being about equivalent to the working power of two horses; and relatively to the producing capabilities of the soil, each horse consumes three times as much food as a man. To put steam power, therefore, in the place of 25 million horses is equivalent to a saving of food for about 75 million human beings more than could otherwise be fed from the same area of soil, under the same state of cultivation. Thus the stock of products of the soil which remains for division among human producers is enormously increased.

Now, we may consider the immense variety of work done by this steam power, and we may add to it the labor of water power, which consumes even less than steam of the earth's products. These vast forces enable man to do from five to a thousand times the quantity of work that he could with his unaided hands. Again, the improvements in mechanical devices yield a colossal gain of product from a given quantity of human labor employed as auxiliary to machines. Take the power looms, three of which machines, making cotton goods and attended by one man, can produce daily 78 pieces of fabric, 29 yards long and 25 inches wide; whereas on the old hand loom of 1800 one man working one loom produced only 4 pieces. In the spinning or weaving of woolen and fine fabrics, the production is multiplied fully tenfold; the sewing machine has produced like results in the manufacture of garments, and thus one of the primary wants of man, his clothing, is gratified by one tenth the human labor required half a century ago. In the matter of shelter, house building, modern woodworking machinery has revolutionized the carpenter's trade. A planing machine does the work of twenty men. In agricultural labor McCormick's reaper alone doubled the grain production in the Western States, simply by enabling the available labor of those regions to harvest the crop which the land was capable of producing. Taking into consideration all the gain in productiveness of the last century, it appears that the labor employed in Europe and America is now producing at least six times as much as the same number of laborers could have produced a hundred years ago: or to state the fact differently, only one man need work now where six worked a hundred years ago to produce the same supply for the satisfaction of human wants to the same extent.

SPIRITUALISTS' FACTS AND REAL FACTS.

We have received a polite request to reprint two brief extracts from our issue of September 2. The first, from the editorial "Is Anybody Sane?" runs in this wise:

"Men smitten with the disease cease to be amenable to reason in all matters connected with spiritualistic delusions. The most patent and ridiculous of frauds and follies, reputedly involving spirits and their mediums, are accepted by them with religious enthusiasm."

The second extract is from the letter of a correspondent, and carries, we are told, an emphatic censure of the foregoing, a censure requiring the most liberal use of italics and capitals to do it justice. We give it without such typographical assistance. Here it is:

"It (the law of gravitation) has been attacked in some quarters even by persons of education, and doubts have been thrown upon its teachings. This was done by the great German poet and philosopher, Goethe, among others; but he was simply ignorant of the facts. Every man judges about things according to the amount of information in his possession; and if Goethe had been informed of the manifold facts verifying this theory, he would surely never have attacked it."

If nothing had been said about censure, we should have taken this communication as a kindly apology for the spiritualists, as people who mean well but are ignorant of the overwhelming evidence against the genuineness of reputed spiritual manifestations and the reasonableness of their theories of spirit existence and action. But censure implies at least a suspicion of error or wrong-doing; and we can see no call for it, nor any indication of it, in the present case, unless our correspondent wishes to insinuate that, as some well meaning people disputed the law of gravitation through ignorance, so we have been condemning, through ignorance of spiritual things, a theory as well supported by verified fact as the law of gravitation is.

If such is the case, we beg to assure him that we have taken pains to enquire into a good many cases of alleged spiritual manifestation of the objective sort, and have failed to discover anything to justify the spiritual hypothesis. On the contrary, every case which has been subjected to real scrutiny has been demonstrated to be a more or less clever fraud, abetted by a positive delusion on the part of the receivers of it; and the probability is overwhelming that the untested cases—if there are any—are of like character.

This is especially the case with objective manifestations. The subjective manifestations, and they are probably the more numerous, are less easy to dispose of, since there is nothing real to bring to light. These involve neither physics nor fraud, but disease. The actors are honest—but insane. Taken in time, a few doses of strychnin and iron, or other nerve tonics, will remove the symptoms promptly and completely. Allowed to become chronic, the disease may, and generally does, run the regular course of ideational insanity.

The unhappy naval apothecary who committed suicide at a pleasure resort the other day—or, as he thought, followed his adored Pauline to the spirit world—is a case in point. The spirit of Pauline which beckoned him onward was as real to him as his own existence; and he could not resist her entreaties to leap the gulf. No reason could convince him that the vision was not his wife's spirit: no, not even the circumstance that his beloved wife was still in the body. Precisely as trustworthy, precisely as convincing to the sane mind, is the testimony of anyone else to the existence of the spirit forms he sees and converses with. It is all craze, where it is not fraud.

A pretty example of fraudulent manifestation is the one exposed in the person of Mrs. Hull in Portland, Maine, the other day. This lady, whose character forbade suspicion, was astonishing believers and unbelievers alike with spirit materializations, under circumstances in which collusion or deceit seemed impossible. In any room in any house, she would stretch a curtain across a corner, retire within the three-cornered enclosure, and, in a little while, "spirits" would come out from behind the curtain, move about the dimly lighted room, speak to the awe-stricken witnesses, and otherwise conduct themselves (one by one) like standard ghosts of good breeding. All this time the medium was supposed to be entranced within her little enclosure: and to make sure that she did not stir, her dress was exposed under the curtain, sometimes drawn out several inches and tacked to the floor.

The spirits triumphed for months, to the great strengthening of such as were in the faith and the serious confusion of the doubtful. But exposure came at last—as it always does, sooner or later. An unbelieving doctor won the medium's confidence, and betrayed it before a number of the ungodly assembled for the purpose of bearing testimony to the medium's discomfiture. By tender entreaties he induced the visiting spirit to trust her hand in his, then held it till lights were struck, and Mrs. Hull stood an unwilling prisoner, a convicted fraud. A little pile of garments in the corner betrayed her method. By sheer audacity she had deceived the very elect with the most honest-seeming materializations that have be exhibited thus far.

"But suppose Mrs. Hull was a fraud, like Katie King and others," our correspondent will probably reply: "that is no proof that spirit appearances are all fraudulent."

True enough: but the unexposed are relatively so few that the presumption—the drift of positive evidence—is decidedly against them. And the circumstance that in every instance the exposure of fraudulent mediums has been made by unbelievers shows the utter incompetency of believers to distinguish deceptive mediums from the genuine, if such there be: in other words, their testimony, however trustworthy in other regions of observation and experience, is good for nothing in this. As we have said before, they are the victims of delusion and mentally incompetent of sound judgment in matters involving their delusion.

Of course we do not imagine that our correspondent, or any like him, will be at all affected—otherwise than displeased—by what we have said. The most courteous reply they can make is that it is our craze, delusion, or what not, to be unable to appreciate the "facts" verifying the spiritualistic theory. We confess the failure: and until we are able first to verify the "facts" (or at least to find out one spiritualistic fact verifiable as neither fraudulent nor foolish) we shall not feel like subscribing to the theory, or even like discussing its probability.

And just here is where we differ from those who disputed the theory of gravitation. They disputed, or wilfully remained in ignorance of, an enormous mass of evidence verifiable by instrumental and mathematical means, evidence that could be verified every time by believers, unbelievers, and the indifferent, alike: evidence, too, which no other theory so easily, simply, and completely satisfied. We, on the contrary, refuse to accept the spiritualist's interpretation of a mass of facts, so called, the most of which have been proved fraudulent or delusive, over and over again; while for the small residue of fact which may be verified, the spiritualist's hypothesis is inadequate, inconsistent with the rest of our knowledge, and enormously difficult of comprehension.

NEW CHEMICAL TEST FOR ALCOHOL.

Professor E. W. Davy, of Ireland, is the author of a new and very delicate chemical test for alcohol, which promises to be of much practical utility. The substance he uses is a solution of molybdic acid in strong sulphuric acid. When alcohol is brought into contact with this solution, a deep azure blue color is quickly developed. The test is so delicate that the presence of alcohol, in so small a quantity as the one thousand six hundred and sixty-sixth part of a grain in a drop of distilled water, is at once revealed.

The new test will be useful in detecting frauds in the preparation of various medical and chemical substances. For example, pure chloroform, owing to its high price, presents a temptation to fraud, and is often adulterated with cheap alcohol. The consequences, to the sick, are apt to be deplorable, sometimes fatal. By the new test, if there is so small a quantity as one part of alcohol in one thousand, in the chloroform, the presence of the alcohol is at once made known. Professor Davy's interesting paper is given in full in our SCIENTIFIC AMERICAN SUPPLEMENT, No. 46, and will be studied with interest by chemists and druggists.

PETROLEUM CHANGED INTO ELECTRICITY AND LIGHT.

Professor W. A. Anthony, in the course of a recent series of experiments with an electro-magnetic machine of the Gramme pattern, made the following interesting observations:

The electric machine was driven by a five horse Brayton petroleum oil engine (illustrated in SCIENTIFIC AMERICAN, page 303, volume XXXIV). The engine consumed a little over six and a half lbs. of crude petroleum per hour. The lamp used in the engine, by which the explosive mixture is fired, had a one inch flat wick, and consumed 29·8 grammes (459 grains) of oil per hour. The power resulting from the motion of the engine, when applied to the electric machine, produced a stream of electricity or electric light, having an illuminating power equal to that of 234 of the lamps mentioned, showing that three times more light may be produced from a given quantity of oil, if its energy is converted first into mechanical power and then into electricity, than if the oil is directly burned in a lamp.

THE MEETING OF THE NATIONAL ACADEMY OF SCIENCES.

The fall session of the National Academy of Sciences opened in Philadelphia on October 17, under the presidency of Professor Joseph Henry. Professors Joel Allen of Cambridge, George F. Barker and W. H. Gable of Philadelphia, and E. S. Morse of Salem, and General John Newton, were elected members. Professor J. E. Hilgard read an essay on the variations in the standard bars to which all measures are now referred in France, England, and this country. He had compared the iron bars sent to the United States as duplicates of the English bronze bar, and found a variation of 0·00034 inch, which is not an admissible error. Professor Hilgard believes that the bronze and not the iron has changed, and that the alteration is due to one of the metals in the alloy being in a state of tension when the standard was made. In making the platinum standard meter in Paris recently, the metal was remelted and worked over nearly 200 times. The duplicate standards, made of cast steel, for this country, are correct to the $\frac{1}{10000}$th of an inch, and differ from each other by less than $\frac{1}{100000}$th of an inch.

Dr. J. L. Leconte read a paper on the hydrocephalus, an insect which resembles a fat mole cricket, and of which there is a specimen in the Brazilian Centennial exhibit. He considered that a careful study of existing insect life will do more to demonstrate its course of development than all that can be accomplished by means of fossils, owing to the fact that insects have kept such forms as they have now, with comparatively slight change, during many ages. The hydrocephalus is especially of service as a missing link between such relations.

The Fire on the Hearth.

The Centennial Commission has awarded a diploma and medal to the stoves exhibited by the Open Stove Ventilating Company, whose invention we illustrated on page 198, volume XXXI. Several are shown in the stove annexe of the Main Building, the operation being made visible by the outer jacket being removed from one of them, and the circulation of heat and the delivery of the products of combustion in an almost cold state being clearly demonstrated.

To Dispose of Curculios.

A correspondent of the *Ohio Farmer* states that he kept a plum tree from curculios by sprinkling the ground under the tree with corn meal. This induced the chickens to scratch and search. The meal was strewn every morning, from the time the trees blossomed until the fruit was large enough to be out of danger. The consequence was that the fowls picked up the curculios with the meal, and the tree, being saved from the presence of the insects, was wonderfully fruitful.

AN English inventor proposes to pump exhaust steam back into the boiler in place of condensing it, and experiments are now being conducted with an engine for testing the invention. The inventor contends that "the pressure exerted by the steam on one side of the piston represents, by its elastic power, the same expressions of power in pressure on the other side; so that the elastic charge is always ready to give back the exact power expended for its expression."

© 1876 SCIENTIFIC AMERICAN, INC.

A NEW WATER ENGINE.

We illustrate herewith a novel water engine, which may be used as a motor and also, if desired, as a pump. A is the cylinder, which is mounted in bearings of a case, D, on trunnions. It has a circular valve, E, formed on the lower end, with one port, F, and fitted to the correspondingly shaped valve seat, G, in which is the inlet, H, and the exhaust, I, also the exhaust, J, for the waste from the interior of the case, D. K represents passages cored out in the cylinder, from the upper end down to the interior of the waste water case, to conduct any water leaking past the piston, L, into the case, to be discharged through the exhaust. A cap, M, screws on to the top of the cylinder, for a guide to the piston rod, N, and these passages, K, enter the cylinder, above the piston, under this cover. The oscillation of the cylinder in the case alternately opens the supply and exhaust passages.

Patented through the Scientific American Patent Agency, September 5, 1876, by Mr. George Wells, Montreal, Canada.

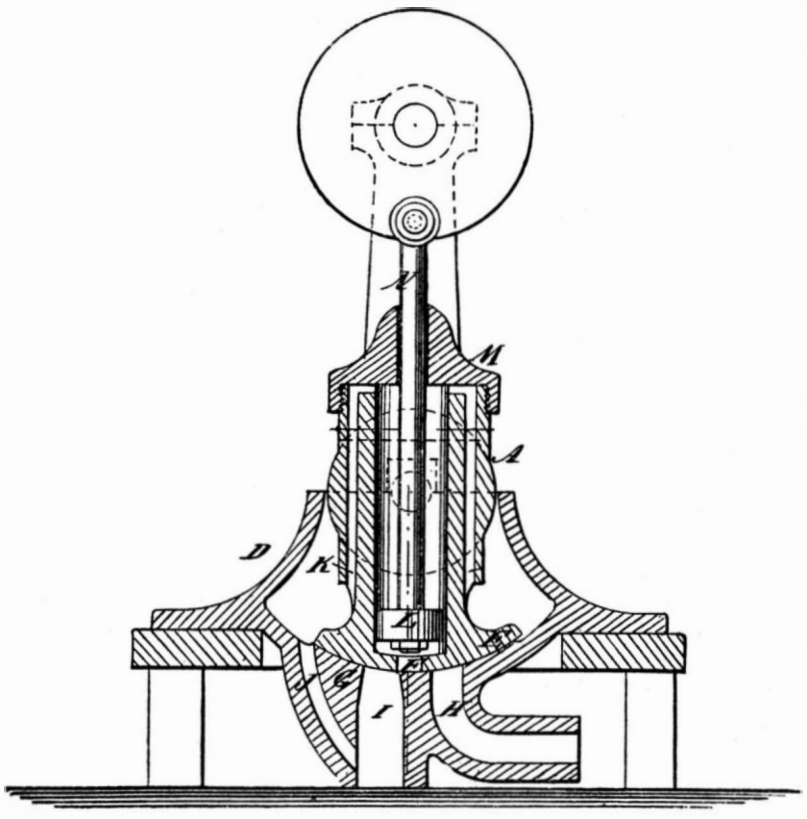

WELLS' WATER ENGINE.

A Machine for Making Cab Drivers Honest.

The latest invention for securing "machine honesty" is the exceedingly ingenious registering device which is to be placed on the new line of street cabs shortly to be established in New York city. It is the invention of Mr. Louis Von Horen, late of Vienna, Austria, and it serves the dual purpose of preventing the cabman pocketing any share of the fares and also of indicating to the passenger the length of time he occupies the cab, so that there is no room for dispute as to how much the latter should pay. The charge is to be at the uniform rate of 50 cents per hour or the same sum for a single trip occupying less time; and the apparatus is of course adjusted with reference to this tariff.

There is a metal circular case about eight inches in diameter, on the face of which are two graduated circles. The inner circle is pointed off similarly to a clock face, only instead of a twelve hour mark there is a zero. On the outside circle there is a simple graduation of units and tenths, so that dollars and cents by it may be registered. The hands on the inner circle are controlled by clock mechanism in the case; the hand on the outer circle must be moved by the driver. From one side of the clock case extend wire rods which carry a sign on which are the words "to hire;" on the same side, and between the rods, there is an extension in which a watch is placed. The whole is pivoted to the front of the cab, just in rear of the driver's seat, in such a manner that, when the "to hire" sign is turned uppermost, it stands above the cab roof, and is plainly visible. Right in face of the passenger in the cab, there is an opening, empty when the sign is turned up as described, but allowing the watch face to be seen through it when the sign is turned down.

Now, when a cab is hired, the driver is obliged to turn his sign down. If he does not, the passenger will demand it, because otherwise the passenger cannot see the watch which is to be consulted in determining the time he has occupied the cab. The driver, in turning the apparatus, thereby sets the clock going, which, supposing the trip to be the first one made that day, registers hours and minutes from 0 o'clock. When the passenger leaves the vehicle he pays his fare, and this the driver registers after the bell punch fashion on the outer dial already described. The driver then must turn his sign up. If he does not, his clock will continue running, and he will have to account for the time in money. The next passenger is registered in the same way—the clock, however, starting at the point at which it left off before—so that at the end of the day, when the inspector comes around, he sees from the two dials, first, the number of hours the cab has been used, and second, the amount received. On the back of the clock, which, on its face, has these dials, is still another dial visible from within the cab. This is simply an index moved forward one degree each time the sign is turned, so that from this the aggregate number of trips made can be learned. The dial is covered and locked up so that the driver has no access to it; and it obviously prevents the driver from taking advantage of the short trips, less than an hour in duration, but charged for as a full hour. By noting the number of trips and of hours employed, the inspector can determine the exact sum due from the driver, which amount ought to be accurately shown on the face of the register.

The device, while somewhat difficult to describe intelligibly, is really very simple, and as an invention it certainly is the best thing of the kind we have ever seen. It neither incommodes passengers as do turnstiles, nor does it fasten a a disagreeable badge on the conductor or driver like the bell punch, nor does it place such implicit reliance on the honesty of the average passenger as is involved in the use of the fare box now in use in all our omnibuses.

How to Settle a Dispute.

The Centennial Judges and Commissioners catch severe scoldings from exhibitors who have received no awards, and from those who do not monopolize all of the praise bestowed on classes of articles. The former think the medals and certificates of no value, on the sour grapes principle; the latter regard them as too cheap and commonly distributed to be worth much. There is only one way to test the soundness of these depreciatory opinions. The Commissioners do not publish the language of the decisions. Perhaps, in justice to the contributors, they ought to do this, and acquaint the whole world with the official result of the competition. As this is not done by the Commissioners at the expense of the Fair, the winners of the prizes have no option but to do it for themselves. Let the unprejudiced public be the arbiter in these disputes about the practical worth of the awards. The test is easily made. A reasonable amount of advertising in the papers would tell everybody what the judges said of any particular article and where it can be found. People would then hunt it up and see for themselves whether it tallies with the judges' descriptions or not; and at the same time the successful exhibitor would learn from this *experimentum crucis* exactly what the award is worth to him. There is no other possible settlement of the controversy, but by advertising. We still adhere to the opinion that the prize system adopted by the Fair managers is the best under all the circumstances; and the recipients of the certificates have it in their power, by judiciously advertising, to turn them into money.—*Journal of Commerce.*

IMPROVED STOPCOCK AND STREET WASHER BOX.

Mr. George B. Hooton, of Williamsburgh, N.Y., has patented through the Scientific American Patent Agency, September 5, 1876, a novel improvement in stopcocks and street washer boxes. It consists of a box, of cast iron, provided with slots. *a*, in opposite sides, to receive the water pipe, B. These slots are closed by the doors, *b*, which are pivoted and

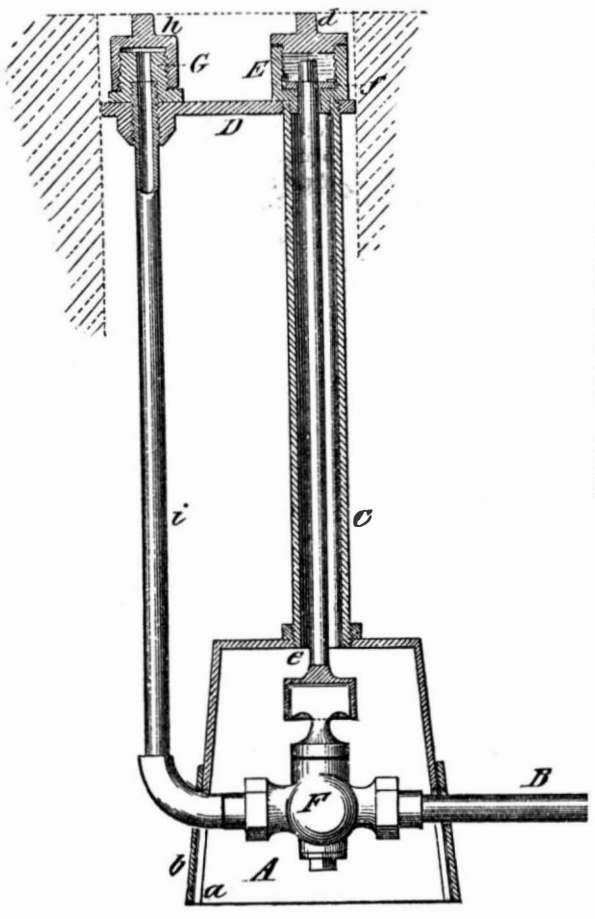

notched to receive the pipe. C is a tube of suitable length, screwed into the center of the top of the box, A, and also screwed into the plate or guard, D. E is a socket formed on the upper surface of the plate, D, and provided with the screw cap, *d*. F is a stopcock in the box, A, the plug of which is provided with an elongated stem, *e*, which runs upward through a hole in the plate, D, and is squared to receive a notched disk, *f*, and the key by which it is turned. The disk, *f*, prevents the stopcock from being turned more than enough to open and close it by engaging with the pin, *g*. The pipe, *i*, for street washing, is provided with a nipple, G, formed on the plate, D, and provided with a cap, *h*, and to which the hose is attached for street washing. When the street washer is not required, the pipe, *i*, nipple, G, and accompanying devices may be dispensed with, and the pipe, B, may run horizontally into the house. When this improvement is used, it is claimed that heaving by frost is obviated. It is impossible for it to become clogged, as there is no channel by which anything can find its way into the lower parts of the device. It is not easily tampered with, as it is impossible to remove the caps without the key or wrench.

How Loggers Live.

Three hundred men will cover and cut a section of about three miles square, taking off over 60,000 logs, which would measure about 10,000,000 feet, each season. Work begins at daylight and ends at dark; and when the days lengthen or the moon favors a longer twilight or earlier morn, the men get the benefit in longer working hours. On the river when the drive is started, work begins at three o'clock in the morning and ends at nine in the evening, the men having five meals; breakfast at six, lunch at nine, dinner at twelve, supper at five, and tea at nine. The meals consist of pork and beans, corn bread, molasses cake, and tea or coffee.

No stint is given to a man's appetite. The fare, such as it is, is abundant, monotonous, nutritious, and cheap. A cook is provided for every fifty men. The beans are generally the large white bush, parboiled in pots holding half a bushel, then ten pounds of pork is set in the middle of the beans in the pot, a quarter of a pint of molasses poured in, and then the pot is set in a hole surrounded with hot ashes and burning charcoal, the top covered with a stone, over which a heavy wood fire is built; and here they stay from five to eight hours, coming out a most palatable dish. All the baking is done in rudely built stone ovens, which are heated, before the dough is mixed, with a good wood fire. The loaves of biscuit or cake are set upon the hot stones, and are cooked quickly and thoroughly.

A camp of three hundred men will consume daily four barrels of beans, one half a barrel of pork, one barrel of flour, half a barrel of meal, one quarter of a barrel of sugar, and five gallons of molasses. The men are encamped in tents, making their beds of boughs, while their extra clothing, a pair of duck overalls, woolen shirt, and two pairs of woolen socks, is kept in an old grain sack and used as a pillow at night.

The Sabbath in the woods is always a day for sharpening axes, mending sleds, repairing boots and clothes, setting out a new tenting spot handier to the cutting in the woods, and all the odd chores which would grow out of the congregation of so large a body of men. All well regulated camps exclude liquor. The work being usually fifty to two hundred miles from any settlement, and the men not being paid until the end of the season, there is little inducement for any speculator to peddle rum through the woods, or for the men to straggle off in search of it.

The consumption of axes and handles is enormous, an ax lasting a month, and a handle about three weeks. The axes are sharpened daily, some camps having regular sharpeners, while others require each man to keep his own axe in order. The old axes are never collected for the junk dealer, the distance to ship them being almost too great to make it an economical measure. Woodsmen generally consider spruce harder on axes than either birch or pine. The gum which runs out of the spruce tree is often found hard enough to chip the edge of the axe when striking through it. The styles of axes differ with nationalities, a Canadian chopper preferring a broad square blade with the weight more in the blade than elsewhere, the handles being short and thick. A down-east logger, one from Maine, selects a long, narrow head, the blade in crescent shape, the heaviest part in the top of the head above the eye. New York cutters select a broad, crescent-shaped blade, the whole head rather short, and the weight balanced evenly above and below the eye, that is, where the handle goes through. A western backwoodsman selects a long blade, the corners only rounded off, and the eye holding the weight of the axe. The American chopper, as a rule, selects a long straight handle. The difference in handling is that a down-easter takes hold, with both hands, of the extreme end, and throws his blows easily and gracefully, with a long sweep, over the left shoulder. A Canuck chops from directly over his head, with the right hand well down on the handle to serve in jerking the blade out of the stick. A Westerner catches hold at the end of his handle, the hands about three inches apart, and delivers his blows rather direct from over the left shoulder.

In fact, an expert in the woods can tell the nationality or State a man has been reared in by seeing him hit one blow with an ax. It is, however, an interesting fact to know that a Yankee chopper, with his favorite ax and swinging cut, can, bodily strength being equal, do a fifth more work in the same time than any other cutter, and be far less fatigued. This in a very large degree will account for the greater percentage of Maine men who will be found each year in the woods of northern New England and New York. *Northwestern Lumberman.*

© 1876 SCIENTIFIC AMERICAN, INC.

NEW SCREW-CUTTING LATHE.

We extract from the *Moniteur Industriel Belge* the annexed engraving of a screw-cutting lathe, the novel feature in which is the system of friction gearing by which the screw to be cut is made to advance or return. Above a toothed wheel, upon the driving shaft, are placed two pinions, both gearing with the former wheel, and consequently revolving in opposite directions. At the extremity of the pinion shafts are friction pulleys, which bear against the interior of the rim of the large friction disk. By means of a hand lever, either of these friction pulleys may be brought into contact with the disk at will, and the latter thus caused to rotate in either direction, turning the screw accordingly. The device is intended to be portable, and cheap. It is the invention of MM. Weise and Monski, of Halle, Germany.

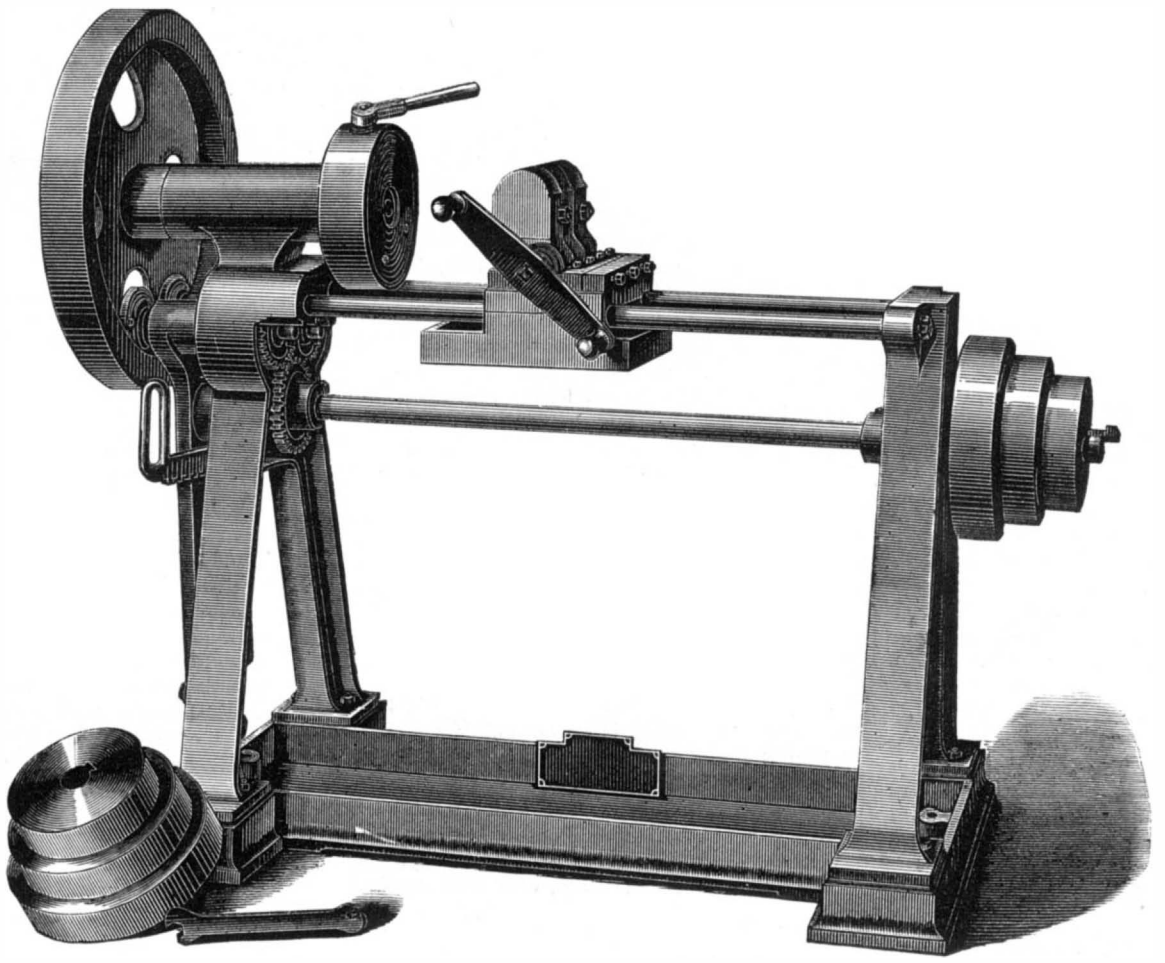

WEISE AND MONSKI'S SCREW-CUTTING LATHE.

Red Wash for Brick Residences.

Travelers visiting Chicago are astonished at the beautiful appearance of the brick buildings in that city, showing so distinctly the lines of white mortar between the bricks. It has taken years of trial, says the *Enquirer*, before a mixture could be found that would stand the test of rain and frost. At last the following has given thorough satisfaction: Venetian red and Paris brown, in proportion to suit the taste, are mixed with a quantity of water to make a heavy wash. With this the walls are well coated. To settle the color to the wall, and prevent its washing off by the rain, a wash with diluted muriatic acid (one quarter acid) is given over the painted surface.

The mixture forming the white lines or joints is made of settled white lime, to which is slowly added plaster of Paris, kept stirring until the mixture is past setting; then mix a little fine sand, to keep from cracking, and work into the consistence of glazier's putty. This putty is then applied to the walls by two men, along a straight edge, and with a beading trowel, the distance of the joints having previously been measured. Care should be taken, in applying this putty, to press it strongly against the wall, to prevent any water from creeping between it and the brick. In winter time we should suppose that the water would freeze, expand, and detach the white joint, thus spoiling the look of the building. But it is important if the treatment above described proves effectual. It is certainly worth trying, for an indestructible red and white paint on brickwork is very beautiful.

England's Dilemma.

The rapid stride of Americans in manufactures connected with iron and steel is impressing upon English makers the necessity of accommodating themselves to the demands of the time, to avoid the almost total destruction of the export trade, and to insure the continuation of the home production. Recent publications upon the subject exhibit upon the upon the part of English makers a spirit of earnest inquiry into the cause of their present condition, and a determination to recover if possible the ground already lost. Among the most earnest of these publications are a number of recent editorials in the London *Times*, containing careful reviews of the situation, which is acknowledged to be serious, and the British people are urged not to "resign themselves to a permanent exclusion from the markets in which the United States manufactures compete—and to estimate more justly the conditions on which business should be conducted in future." It is not admitted that the protection afforded by almost prohibitory tariffs has had any material effect in contributing to the success of American makers; but the conclusion is reached that this result is mainly attributable to the reduction of the cost of manufacture in the United States by the use of machinery, mainly devised with the view of dispensing with the hand labor, but incidently resulting in supplying better products. While English manufacturers have, admittedly, been pursuing old and wasteful methods, encouraged until lately by the low prices of fuel and labor, and have rested secure in the apparent monopoly which has so long existed, the manufacturers of the United States have been forced by the high price of labor to devise and employ appliances for dispensing with or reducing hand labor to as great a degree as possible. It is the success of these efforts that has resulted in almost totally destroying the markets heretofore enjoyed by the English manufacturers in the United States and in greatly impairing their trade in the British colonies, and, in some instances, even in England. As a remedy for this condition of affairs, English manufacturers are placing their workshops upon a better footing than heretofore, by the adoption and use of new labor-saving processes and machinery, and are already congratulating themselves upon the advance made in this direction.

With this view a recent meeting of the Institution of Mechanical Engineers, at Birmingham, devoted a large portion of its time to the consideration of modes and appliances for dispensing with hand labor in puddling, it being admitted that this result was indispensable to the obtaining of products of the quantity and at the prices now required to meet the demands of the market. So, also, earnest efforts are made to remedy the evil by reducing the cost of labor. When our British cousins take hold in earnest with the intention of overcoming obstacles to their progress, we may be sure that such obstacles will be conquered if possible, and American manufacturers may well bear in mind the experience which resulted so disastrously to their rivals, and avoid falling into a like error. There must be no suspension of efforts to perfect and improve, with the idea of having reached a secure point. Those who are in advance must go forward, or they will soon be in the rear.—*American Exchange and Review.*

IMPROVED WOOD CARPETING AND INLAID FLOORS.

The National Wood Manufacturing Company, of 950 Broadway, New York city, for several years engaged in the manufacture of wood carpeting and inlaid floors, have devised a new method of constructing tesselated flooring for private or public buildings, which is illustrated herewith.

Fig. 1 shows a sectional block or square, composed of pieces of wood of various forms, sizes, and colors, combined in one section. By the aid of suitable machinery, a series of dovetailed grooves are cut in the under side of each floor block; and dovetailed strips of wood, or binders of other suitable material, are inserted in these grooves, as shown in the side view, Fig. 3, and held in place by glue or waterproof cement. The blocks are then brought to an even surface and size, and are ready for laying in the usual manner. Fig.

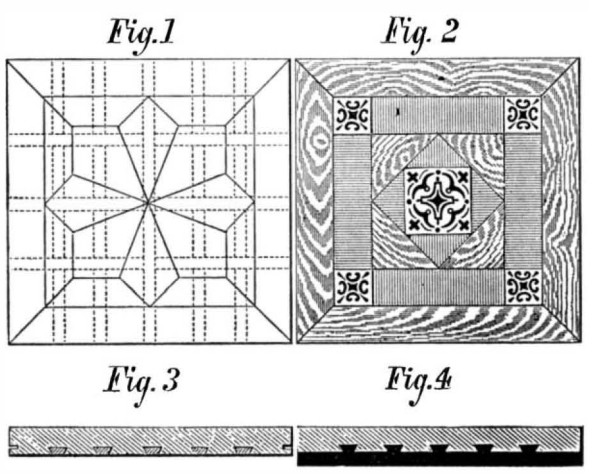

4 shows a modification of this method of construction, a preparation of asphaltum being used, which firmly adheres to the wood, fills the grooves, and forms a solid and substantial backing for each section.

Fig. 2 shows the use of ornamental tiles in combination with the wood, as they are retained in place by the adhesion of the asphaltum. The tesselated flooring is especially adapted to buildings of fireproof construction, and wherever else it is requisite that a strong, durable, perfectly waterproof, and airtight floor should be used. It may be secured to the floor by first spreading a thin layer of hot asphaltum on the floor, and then pressing the sections down upon the floor. The average thickness of the flooring is $\frac{1}{8}$ of an inch for Fig. 3, and $1\frac{1}{2}$ inches for Fig. 4; and the grooves being on the under side, this allows a wearing thickness of about $\frac{3}{4}$ of an inch, or double that of ordinary flooring. The size of the sections average 18 or 24 inches square.

Patented through the Scientific American Patent Agency, May 30, 1876. The patent was reissued on August 29, 1876. The invention was also patented in Great Britain on June 14, 1876, and in Canada on June 30, 1876. For further particulars, address the National Wood Manufacturing Company, as above.

Climbers and Shade.

In houses devoted to the cultivation of decorative plants, grown either for their flowers or the beauty of their leaves, the effect is much improved by the use of climbing plants trained to the rafters in the usual manner; but elegant as these unquestionably are, and much as they contribute to hide the objectionable straight lines of the wood or ironwork, the extent to which they are allowed to cover the roof must be very limited, unless there is a dispo ition to sacrifice the health and appearance of every plant occupying the body of the house that requires full light in which to grow. No greater mistake can be made than allowing roof climbers an unlimited amount of room in plant houses. Indeed, in the case of amateurs (says a correspondent in the English *Garden*), who may possess only a single house, and who keep this entirely devoted to the growth of flowering plants, with perhaps a few fine leaved ones, the matter should be well considered before any climbers are introduced at all; for even with the most spare growers that can be so employed, those that occupy the body of the house will be injured to some extent. During the middle of the day, in bright weather, the climbers will possibly do little harm, and to plants in flower they may even be an advantage by breaking the force of the sun's rays; but for every hour they are of benefit to plants underneath them, there occur a dozen in which they do serious injury, and that in proportion to the extent to which they obstruct the light. If amateurs use them in houses of the description under consideration, they should employ only the most spare growers, such as will furnish but a moderate number of pendent shoots, avoiding all strong rampant-growing kinds; for although it is easy to keep the latter within bounds by a free use of the knife, yet this work does not always receive attention, or there is a reluctance to cut away the shoots.

The more light the house affords, from the principle upon which it is constructed, and the favorable position in which it stands, the more roof climbers may be allowed. During bright sunny weather in the summer months, most flowering plants will last longer in bloom if they are shaded in the middle of the day; but nothing is more common than to see this so much overdone that the whole are seriously injured by the obstruction of light through the material employed being too thick, or the use of fixed shading Where either of these evils exists, it is impossible for the plants to remain long in a satisfactory state. It should always be borne in mind that almost every plant which we cultivate under glass receives in its native country considerably more light than our climate affords; therefore, wherever blinds are used, they should in all cases be attached to rollers, so as to be easily drawn up and down as occasion requires, and they should never be allowed to remain down when the sun does not shine upon the house. Even in the case of ferns (with the exception of the filmy species and a few that exist naturally in shady situations), they thrive much better fully exposed to light when the sun is not upon them.

Training Canaries.

A gentleman residing at Phœnixville, says the *Reading Eagle*, of Queensland, Australia, has several very fine canary birds to which he has given much attention. One of the birds he has tanght to sing "Home, Sweet Home," clearly and distinctly. His mode of instruction is as follows: He placed the canary in a room where it could not hear the singing of other birds, and suspended its cage from the ceiling, so that the bird could see its reflection in a mirror. Beneath the glass he placed a musical box that was regulated to play no other tune but "Home, Sweet Home." Hearing no sounds but this, and believing the music proceeded from the bird he saw in the mirror, the young canary soon began to catch the notes, and finally accomplished what its owner had been laboring to attain, that of singing the song perfectly. This is an experiment easily tried, and one we should be glad to know the result of from some of our own bird fanciers if they make the experiment.

© 1876 SCIENTIFIC AMERICAN, INC.

Continued from first page.

wherever the visitor may wander, except, perhaps, in the Woman's Building and the Art edifices, boats meet him at every turn. Had this magnificent display been brought together and classified, it would undoubtedly be the largest and most instructive ever gathered. Certainly, any one desiring to prepare an exhaustive work on the subject might find at the Centennial all the material necessary for the task.

The engravings which occupy our first page this week represent a number of the most curious and widely differing vessels, selected from the displays of the different nations. Standing in the middle aisle of the United States Building is the gigantic dug-out—an immense canoe hollowed from the trunks of massive trees—by the Vancouver's Island Indians, and measuring 60 feet in length by 8 feet beam. It is made in four pieces, and was probably intended for warlike purposes. In the engraving, the painted bow is represented, covered with the strange picture writing peculiar to its savage builders. The designs, notably of the eyes, depicted near the bow, curiously correspond with the similar decorations to be found on Chinese junks. This is a slender link, but is perhaps of some ethnological value in indicating the relationship between the tribes, part of which went to the southward in Asia, and part crossed Behring's Straits, and entered the American Continent. The British Columbian whaling canoe, shown above the dug-out, reminds one somewhat of a Venetian gondola. It is made in few pieces, and has a broad gunwale ending in a fork at the bow. The same strange Indian designs are painted both inside and outside the vessel.

Not very long ago, the yacht Amaryllis, built on the catamaran principle, vanquished several of the finest center board and keel yachts in this vicinity. This circumstance has directed interest to this peculiar mode of construction; and we represent three of these odd boats, as made in as many widely separated parts of the globe. The simplest is the catamaran of the Philippine Islands, which is merely an ordinary canoe having two bent spars lashed athwart ships and connected by rough cross logs at their extremities. These prevent the boat capsizing, through resisting her tendency, when she heels, to submerge them. The anchor used by the Philippine Islanders is likewise represented. It consists of an iron-tipped hook of wood, and is obviously of little value, since there is no way for it to hold bottom unless the hook end falls underneath.

The second catamaran, that peculiar to Pernambuco, Brazil, is of an entirely different species, and is not a true type of its kind. The name catamaran is, however, applied in the navy to an assemblage of empty casks, lashed together and covered with a staging to form a raft; and in some parts of the world any raft of logs obtains a similar title. The present craft is, however, peculiar, because it has a center board, an odd appliance for a raft. The cabin, which is just big enough for the occupant to crawl into head first, is mounted on a slanting platform, and there is a huge steering oar held in a high crotch. The sail is odd shaped, and, being widest at the top, is excellently adapted to capsize any vessel on which it may be placed; hence probably the reason for the center board. Catamaran No. 3, from the Sandwich Islands, is an elaborate affair, but genuine in its way, inasmuch as it embodies the principle of "united we stand, divided we fall," as all true catamarans should. The main canoe is so very high and narrow that it would promptly upset, even without the aid of its immense mast and sail; but the broad outrigger and solid boat-shaped block at the end thereof hold up the whole fabric. These vessels sail faster than any known sailing craft, and are staunch in the roughest seas. The Hawaiian catamaran is a double-ender, that is, it sails either bow or stem first. It never tacks to turn around. When the ingenious captain desires to go about, he casts loose the forward lower corner of his sail, hauls it around to the other end of the boat, and makes it fast there. Notice, also, that the mast is stepped on the gunwale and thus brought nearer to the center of gravity of the whole combination.

Another curiously primitive boat is the tub-like affair made by the Gros Ventre Indians, of Dakota Territory. It is a mere basket of ash or hickory withs, covered with raw hide, and propelled by the paddle shown. An odd fact here to be noted is that this craft is almost identically the same as the coracle used on the rivers in Wales for fishing purposes. In fact no one can study all these kinds of boats without becoming impressed with the similarity of working in the minds of people, utterly dissimilar in race and in every other respect, in order to reach a given object. Compare the old Swedish anchor, illustrated side by side with the like device peculiar to the Brazilian aborigines. The same apparatus is employed by our own east coast fishermen. Doubtless hundreds of persons have each deemed themselves the original and only inventor of that contrivance.

There are strange contrasts among the boats. The Philippine catamaran is so long and narrow and high that it must, to sail at all, be held up; on the other hand the Dutch fishing pink is so short and broad and low that it would be difficult to upset it. The craft is very nearly as broad as it is long; the mast is stepped very nearly in the middle of the boat, and there are two bowsprits, although why the ordinary rule, of attaching jib and staysail to one spar, is not followed is a mystery. The pink is built for sailing in very shallow water, such as is found on the shoals in the North Sea; and to prevent her drifting to leeward, crab-fashion, huge weather boards are attached to her sides and dropped vertically into the water to offer a wide area of resistance. These vessels, like everything Dutch, are usually models of neatness, and abound in varnished wood and brilliant brass ornaments, to the exclusion of paint.

Another sharp contrast is found between the Indian skin boat, already described, and the Greenland kayak or "man's canoe." This boat is usually about 16 feet long, 2 feet broad, and 1 foot deep. The bottom is rounded and has no keel. The frame is kept stretched above by a large number of little beams, and two strong battens run from stem to stern, which, toward the middle, are attached to a hoop of bone large enough to admit the body. The frame is entirely covered, with the exception of the circular hole in the center, with freshly dressed seal skin. When complete, the boat weighs about 60 lbs., and is so constructed that it can be carried on the head without the aid of the hands.

The vessels in which the ancient Northmen made their voyages, which resulted in the discovery of America and Iceland, or in which the Danish Vikings sailed on their pillaging expeditions to the coast of England, find their modern reproductions in the Norwegian craft now used for fishing and pleasure purposes. The high prow, whereon was the dragon's head in ancient times, may be traced in both the Nordland's raaseils (reefed sail) yacht and the fishing smack which we illustrate. The former has the old square sail, and in model is almost the same as the Vikings' vessels.

The curious Russian double canoe is in the Russian section of Machinery Hall. It is a beautifully made craft, having a hull in two portions and a comfortable arm chair located on a grating between. The Russian single canoe has a neat rig, easily managed by the sole occupant of the vessel. The gaff is fitted with halliards and downhaul, leading through fair leaders to the cockpit. Another type of vessel, which disputes with the canoe the supremacy for pleasure purposes, is the duck boat. Our sketch is taken from the craft in which Mr. N. H. Bishop, of New York, made his famous voyage from Pittsburgh *viâ* the Ohio and Mississippi rivers to the Gulf of Mexico, and thence to Cedar Keys, Florida, a distance of 2,600 miles. The boat is very wide, and draws but very little water. The screen shown serves as a protection against the weather, and as a tent at night.

The celebrated yacht America, a vessel which won her laurels in 1851, and which our yacht builders, with all their skill, have never yet improved upon, had masts which raked heavily aft, and she drew nearly three times as much water aft as forward. Despite the speed and other advantages thus gained, a shipbuilder in Bombay has constructed the Ocean Queen in diametrically the opposite way, and claims that she beats steamers, making, with a favorable breeze, some 20 knots per hour. The masts rake, Malay style, greatly forward, where the heaviest draft of water is found. It remains for naval architects to reconcile the discrepancy if they can.

The last two vessels which we have to describe are essentially the outcome of Yankee ingenuity. The first is a non-heeling boat. The hull is hung on pivots in a heavy frame, which constitutes stern post, stem post, and keel in one. The mast is stepped in the stern. Consequently, when the wind pushes the sail horizontally, the keel, etc., are alone lifted, while the boat remains perpendicular. The turkey bone yacht, some ingenious New Englander has contrived from the sternum of the turkey. It is needless to say that its size is diminutive, and that it is not intended to sail. A deck is attached to the under part of the bone, the narrow projecting part of which forms the keel. Rudder, bowsprit, mast, and sails, and small boats complete the resemblance to a miniature sloop.

Correspondence.

The Necessity of an Effective Steam Engine Governor.

To the Editor of the Scientific American:

The most important question for our manufacturing interest is how to reduce cost of production without cutting down wages of operatives, now too low in many sections of the country. As manufacturers look to you largely for information and help, permit me to make a suggestion.

The markets of the world are open to American manufacture, provided they can furnish fabric as cheap as any other nation. We can produce goods cheaper, and yet pay a fair price for labor. We have the best machinery, and our operatives are more intelligent and capable than can be found elsewhere. How then shall we produce more goods from the same mills and without material increase of cost? The answer is simple: By increasing the speed of machinery, which cannot produce its most profitable results without being run at the highest rate of speed consistent with its durability and with the production of a perfect fabric.

But no machinery can be run at or near its highest rate when subject to uncontrolled variations. Suppose, for instance, that it is found in a mill that all work can be well done with the main engine running at 55 revolutions. Now, if the engine varies 4 revolutions in its speed, under different loads of work or a varying pressure of steam, it is manifest that it will not be prudent to run the engine at over 52 revolutions, lest mischief be done when the speed increases. If the engine could be held within one revolution, it is clear that it could be run at 55, and practically, with its steady motion, even a little higher than that. This would give a net increase in production of from six to ten per cent. Until recently, this has not been practicable, but it has become so

Mr. Huntoon, of Massachusetts, a most thorough engineer, who has devoted twenty years of his life to controlling steam engines, has invented a governor which will do this, and which is rapidly coming into use. His governors are now used by the Merrimack Manufacturing Company, the Naumkeag, the Groveland, and hundreds of other mills, and are in many cases largely increasing their production. This governor is simple in construction, not liable to get out of repair, neat in appearance, noiseless, powerful, and inexpensive.

The unnecessary wear and breakage of machinery and consequent stoppage for repairs, the temporary delays for mending broken threads, and the value of various fabrics injured or spoiled, are all large items in the expense of running a mill, a great part of which is the result of varying speed. The increase in quantity and improved quality of the products of cotton, woolen, iron, flour, and all other mills running at a maximum and even speed, will give a large profit over what can be produced by the same mills running with varying speed. It will give me pleasure to send, to persons interested, full descriptions of this governor.

STILLMAN B. ALLEN.

Boston, Mass.

Large Belts.

To the Editor of the Scientific American:

In your issue of October 7, mention is made of a very large rubber belt, manufactured by the New York Belting and Packing Company, namely, 331 feet long and 4 feet wide, which was considered the largest belt ever made. Messrs. J. B. Hoyt & Co., New York city, have recently made, for Jessup & Moore's paper mill at Wilmington, Del., a double leather belt 186½ feet long and 5 feet wide. It weighs 2,212 lbs., contains 1,865 square feet of single belting, and has taken 150 of the heaviest oak-tanned hides, selected from 5,000. I think this belt is the largest ever made.

New York, October 14, 1876. S. R. K.

[For the Scientific American.]

CUTTING SPEEDS FOR LATHE WORK.

There is a wide variation in the speed at which different workmen will cut the various metals in the lathe, and it is very difficult for all save the most expert to determine when a tool is or is not performing a maximum of duty. We append below a table of cutting speeds for average work upon metals of the ordinary degree of hardness. Here, however, we may remark that these rates are not intended for use with tools which are so slight in form as to require to be tempered below a very light straw color; and the figures have in fact been determined from the use of tools whose temper has not been drawn at all, for the reason that no turning tool should have its temper drawn unless it is so thin as to be liable to bend from the cut, as in the case of a very slight parting tool. If it should be found in any case that the tool will not stand the rate of cut here given, the fault is most likely in the tool, and should be looked for in the forging or the shape thereof. The fault in forging is apt to be overheating in the fire. If, however, the metal of the work becomes, when the tool is applied to it, bright and glossy-looking, it is hard, especially if the turnings fly off in spurts. If, upon brass work, the tool at the given speed springs into the work, or either jars or chatters, the fault lies in the shape of the tool, and not in the cutting speed; and the remedy to be applied is not to grind the uppermost face of the tool so keenly, which will inevitably remedy the evil. The lathe revolutions are given, instead of the feet of cut per minute, so that the operator can ascertain the ratio of the duty he is performing without requiring to make a calculation. For copper work, the speed may be from two and a half to three times the speed given for brass work.

If hand tools are used, the speed may be in each case increased, especially in the case of scrapers upon cast iron and brass.

WROUGHT IRON WORK.

Diameter of work in inches	Lathe revolutions per minute for roughing cuts	Lathe revolutions per minute for finishing cuts
1	135	145
2	50	60
3	30	35
4	20	23
5	16	18
6	12	14

CAST IRON WORK.

Diameter of work in inches	Lathe revolutions per minute for roughing cuts	Lathe revolutions per minute for finishing cuts
1	145	150
2	70	85
3	45	55
4	30	38
5	23	30
6	16	22

BRASS WORK.

Diameter of work in inches	Lathe revolutions per minute for roughing cuts	Lathe revolutions per minute for finishing cuts
1	450	450
2	194	200
3	100	110
4	66	72
5	45	70
6	37	70

STEEL WORK.

Diameter of work in inches	Lathe revolutions per minute for roughing cuts	Lathe revolutions per minute for finishing cuts
1	75	80
2	35	45
3	30	30
4	15	18
5	12	15
6	9	10

New York city. J. R.

© 1876 SCIENTIFIC AMERICAN, INC.

Raising Nut Trees.

Every true lover of nuts likes to raise trees and test the different varieties. The very best kinds should be selected for cultivation, says a writer in the *American Socialist*; and if the seeds are saved from the most perfect of them, the chances for producing good fruit will be more certain. The best method of keeping nuts for seed is to let them get quite ripe before gathering; then partly dry them and mix in dry sand, put them in thick, mouse-proof boxes, and bury in sand on a dry bank. In spring, select a rich, loamy soil, plow deep, pulverize well, and drill in the nuts, far enough apart to allow the trees some space to grow and room to cultivate between the rows. As soon as the young plants appear, the soil should be loosened around them frequently, which will effectually prevent weeds from growing, as well as hasten the growth of the plants.

After the second year's growth it might be well to clip off the ends of the vigorous side branches, thus sending the life into the main stem. As the stalk grows stouter, the branches may be cut close. However, it is better to leave them on a little too long, than to have slender, top-heavy trees.

Do not transplant until they are large enough to be staked, or until they are three or four years old. The ground, if intended for an orchard, should be subsoiled, and the holes for the young trees dug deep, and fertilized with a little old manure, unless the soil is very rich. The trees may be carefully dug, saving all the roots, and leaving them as long as possible and free from bruises. If a part of the soil can be removed with them, all the better. The roots that chance to get cut by the spade, should be cut clean from the under side, in order that the rootlets may start in the best direction. They must be covered with earth or cloths until they are set out.

In setting, some advise to lean the tree a little to the west, or in the direction of the prevailing winds. The young trees may be set at the same depth as when taken up. The roots should be carefully spread, and fine soil packed tightly around them with the hand, and then filled in with dirt and trodden down firmly. A good stout stake, with a string and cloth fastened tightly around it, finishes the job, and the storms may come. Stir the ground often till dry weather, then spread a thin layer of manure, or a thick coating of chip dirt, old straw, or other litter. These are of great benefit the first year, saving the labor of stirring the soil.

After the first year's growth, in order to make handsome and fruitful trees, it is necessary to use the knife freely. "I prefer training the main shoot as leader, encouraging the branches that start out at nearly right angles, and checking or cutting away those too much inclined upward, as they are apt to split off when laden with fruit or snow. I would cut away all branches not radiating from the center of the tree, as well as all cross branches, leaving them far enough apart to let in light and sunshine, and keeping the tree symmetrical in every direction. This can be done by clipping back those branches which have a tendency to get ahead of the rest; and an abundant crop of nuts may be expected."

Professor Wanklyn's Method of Treating Permanently Hard Waters.

These waters contain the sulphates of lime and magnesia, which have always proved to be the most difficult of removal. Professor Wanklyn has recently proposed to soften waters of this class by first adding bicarbonate of soda and then lime. The bicarbonate of soda first converts the sulphate of lime into bicarbonate of lime, and subsequent addition of lime precipitates the bicarbonate so formed. Sulphate of soda remains in solution in the water.

If hard water must of necessity be employed for scouring with soap, it is advisable to separate the hardening matter, by mixing a sufficient quantity of a hot solution of soap with it, and then causing it to run through a filter bed before use. The insoluble soaps will thus be separated without attaching themselves to the wool or fabric, and they may be collected and treated with hydrochloric acid, to decompose them and separate the fatty acids, which may then be collected and reconverted into soap, by boiling them up with caustic or even carbonate of soda, and the soap thus obtained may be used again, for the same purpose. Water thus treated is well adapted for the scouring of wool and woolen goods.

Organic matter, oxide of iron, and often a considerable proportion of the hardening matter, may be caused to rise to the top, and may then be skimmed off, by dissolving alum in the water in the proportion of about 4 ozs. per 1,000 gallons, and then rising it to near its boiling point.

In preparing waters which contain alkaline or earthy carbonates or bicarbonates, as a bath for either mordanting or dyeing, they should be treated with sufficient sulphuric acid to expel all the carbonate acid, and neutralize any alkali which may have escaped washing out from the scour. The use of bran is frequently serviceable in removing impurities from water in the bath.

The refuse waters from a woolen manufactory contains within themselves the elements of their own purification. At the present time, the practice is to turn these refuse waters into the river courses as they are done with. Sometimes mordant baths are run out; at other times the spent dye baths, and soap, or alkaline fluids. These mingle in the common receptacle, the river, and precipitate each other there, thus producing those black deposits which give to our streams in the woolen districts such an inky and foul appearance. Solutions of all the substances used in our woolen industries have mixed and it is found that they precipitate one another, and leave the supernatant water in a tolerably clear condition. The remedy seems to be, so far as the woolen trade affects the purity of the rivers, to run all the liquids into one common reservoir, and, after subsidence, to pass, if necessary, the supernatant water through a filter bed into the river. The utilization of the black muddy deposit would, doubtless, speedily follow.

On the Size and Weight of Atoms and Molecules.

When a compound body has been divided and subdivided until it is no longer possible to divide it again without splitting it up into its constituent parts, this extremely small particle of matter is called a molecule. A molecule is defined to be the smallest particle of matter that can exist alone by itself. Physicists have also learned that all molecules are of the same size. This law, as laid down by Avogadro in 1811, and by Ampère in 1814, is that "equal volumes of all substances, when in the state of gas, and under like conditions, contain the same number of molecules." These molecules are each made up of one or more atoms, an atom being the smallest particle of matter that can exist in a compound. The molecules of most elementary bodies are made up of two atoms, a few of four atoms, and a few of one atom. As all molecules are of equal size, it is easy to determine their relative weight, provided only that we can convert the substance into a vapor; for its vapor density, or specific gravity as gas, referred to that of hydrogen as unit, gives us the weight of the atom in terms of the hydrogen unit. Thus it happened that we have long known the relative weight of the atoms of nearly all simple bodies, and the weight of the molecules of many compound substances.

To determine the actual absolute size or weight of an atom or of a molecule was, not long since, considered impossible, but careful physicists have succeeded, using as their foot rule the length of a wave of light, in measuring with an approach to accuracy the size of these infinitesimal objects. Sir William Thomson fixes their size between the $\frac{1}{2500000000}$ and the $\frac{1}{5000000000}$ of an inch, probably the $\frac{1}{5000000000}$ of an inch, or the $\frac{1}{200000000}$ of a millimeter in diameter; and the weight of a molecule of hydrogen, he places at the fifteen million, million, million, millionth of a milligramme (or 0·000000000000000000000015 milligramme), and the weight of an atom of hydrogen is just half that.

J. Annaheim published a paper in the last number of the proceedings of the German Chemical Society of Berlin, in which he described an experiment for showing the minute sizes of molecules and atoms; but his results permit us to suppose the atom of hydrogen far heavier, and therefore larger. than Sir William Thomson's calculations indicate.

Annaheim's experiment is an interesting one nevertheless, because it appeals to the eye, and as a lecture experiment must prove a striking illustration of the extreme divisibility of matter, without the necessity of the rather tedious course of reasoning and abstruse calculations of Thomson. Annaheim dissolves 0·0007 gramme (=0·0108 grain) of fuchsin ($C_{20}H_{19}N_3HCl$) in alcohol, and dilutes the solution to 61 cubic inches. In every 0·061 cubic inch there is 0·000010801 grain of the dye. If some of this liquid be placed in a burette of 1 centimeter (0·39371 inch) in diameter, it will appear strongly colored if viewed against a white background. If we drop the thirty-fifth part of a cubic centimeter into a small dry test tube, 0·8 centimeter ($\frac{3}{10}$ inch) in diameter, the red color can be recognized with certainty by placing the test tube inclined upon white paper, and observing it parallel with the surface of the paper, a second tube of pure water being placed beside it for comparison. This shows that the naked eye can perceive the 0·00000002 gramme of fuchsin (or 0·0000003 grain). As every drop must contain at least one molecule of the substance (whose molecular weight is 337·5) the absolute weight of an atom of hydrogen is not over 0·00000000005 gramme. Cyanin gives about the same figures for a hydrogen atom.

Proposed Retention of the Main Centennial Building.

It now seems probable that the Main Building at the Centennial Exposition will not be torn down after November 10, but will be allowed to remain for permanent exhibition purposes. A request of this kind from prominent citizens of Philadelphia was recently made to the Fairmount Park Commission, but was refused. A conference committee has, however, since been allowed, and the matter has been so forcibly urged that the Commission, it is believed, will reconsider its determination. The building is excellently suited for the purpose intended, much better so indeed than Machinery Hall, which was at first proposed. It is strong, and will stand for twenty years if provided with a tin roof and otherwise cared for. Several of the foreign governments have expressed their willingness to allow their exhibits to remain, and some foreign exhibitors will even increase their displays. About six hundred thousand dollars are required for the enterprise, half of which, we learn, is already subscribed, and the remainder is easily obtainable. The idea is an excellent one, as a great permanent show in which new devices of all kinds can be expeditiously introduced to the public has long been needed. We trust the plan may meet with every success.

Iron Rust as a Cause of Fire.

The rather old notion that fires may be caused by iron rust is thus defended by a recent English writer: "When oxide of iron is placed in contact with timber excluded from the atmosphere, and aided by a slightly increased temperature, the oxide parts with its oxygen, and is converted into very finely divided particles of metallic iron having such an affinity for oxygen that, when afterwards exposed to the action of the atmosphere from any cause, oxygen is absorbed so rapidly that these particles become suddenly red hot, and, if in sufficient quantity, will produce a temperature far beyond the ignition point of dry timber. Wherever iron pipes are employed for the circulation of any heated medium (whether hot water, hot air, or steam), and wherever these pipes are allowed to become rusty, and are also in close contact with timber, it is only necessary to suppose that under these circumstances the finely divided particles of metallic iron become exposed to the action of the atmosphere (and this may occur from the mere expansion or contraction of the pipes) in order to account for many of the fires which periodically take place at the commencement of the winter season."

Artesian Wells as a Source of Power.

The Chicago *Journal of Commerce*, in an article on the utilization of the water pressure developed by artesian wells, for the driving of engines etc., makes the following statements, and invites criticism thereon: 1. It is affirmed that many of the wells bored in Chicago or vicinity are capable of throwing a jet of water to a minimum hight of 30 feet. 2. "A column of water, 1 inch in diameter and 20 feet in hight, held in a strong tube screwed into the head of a full cask, will so expand its contents that it is next to impossible to construct one of sufficient strength to withstand the pressure. Such a pressure as this would drive a turbine wheel with all the power and velocity necessary to keep in operation four run of millstones." 3. Consequently an artesian well, capable of lifting a four-inch column of water 30 feet high, and pouring it into "a large receiving reservoir 15 or 20 feet above a turbine wheel, would supply water power sufficient for a very large manufactory."

Admitting our contemporary's assertion that water is projected to the hight of 30 feet, and taking in connection therewith the largest yield per day, ascribed by good authority to the best Chicago well as 420,000 gallons, it is easy to calculate the horse power gained. It would be about 72,000 foot pounds per minute, which corresponds to about 2½ horse power; or if the turbine is adjusted with 20 feet head, as suggested, there would be actually utilized about 80 per cent of 1½ horse power, which would scarcely drive any very large manufactory. There are, we believe, about 40 wells in Chicago, with an average flow of 200 gallons per minute. Supposing, for the sake of the calculation, that all ejected their water to a hight of 30 feet, the aggregate power would be 58 horse power. The depth varies from 650 to 1,646 feet, or averages 1,148 feet per well, or a total of 45,920 feet for all. Now, says the *Journal*, "the expense of boring and tubing would be about $1,000 for each 100 feet." That is $10 a foot or the sum of $459,200 for making 40 wells just like those now in existence, by which just 58 more horse power would be gained, at a cost of nearly $8,000 per horse power!

Our contemporary has been confounding pressure with power, as the second of its assertions above given plainly shows. Nearly 500,000 gallons of water a day thrown 30 feet into the air by a mere natural spring sounds gigantic, but a very small steam pump would accomplish the same with ease. It would take about five times as many wells as Chicago now has to produce as much water daily as the great pumping engines at her waterworks now raise, and about twenty-two times as many such wells as are above noted to aggregate the power of the same vast machines.

Shipping Nitro-Glycerin.

Professor Mowbray, of North Adams, started for Omaha, last week, to get permission to ship 10 tuns of nitroglycerin over the Union Pacific road to Virginia City for use in the Sutro tunnel. All the other roads allow its transportation now, even the New York Central, which will not take baled hay, for fear of fire. The nitroglycerin is carried in refrigerator cars; and as it congeals at 40°, it is easily kept frozen, and in that state it cannot be exploded. It takes about ten days to ship it to the tunnel; and if it can be taken by rail, Mr. Mowbray can have a contract for 25,000 lbs. a month for a number of years. The Professor has his new factory so systematized that but two men are kept in the works, and they can make all the nitroglycerin he can sell. He uses only a tun of coal a week now, whereas he used to burn a tun a day. He buys his coal in New York, and puts it down at his works on the mountain at a total cost of $6 a tun.

The Cat's Eye.

For scarf pins and finger rings, the cat's eye has become one of the most fashionable stones used. It is a species of the sapphire, and the most desirable color is of a yellow-green tint. It has threads of white asbestos within it, and the light is reflected from these in an intense and peculiar manner. When this stone is properly cut, a white band of light is seen floating in its interior. that changes position as the gem is moved before the eye, which peculiarity probably suggested the name by which it is generally known.

The First Brooklyn Bridge Cable Passed.

The work of carrying across the first immense wire cradle cable, of the East River bridge, was recently successfully accomplished. The great rope was attached by sister hooks to wheels which rested on the carrier cable, and the movement of the latter slowly transported it over the river. The work of connecting the cable to the anchorage is now in progress, and will occupy considerable time.

A CORRESPONDENT sends us from Franklin, N. Y., a twig from an apple tree which has at its extremity a perfectly formed and colored apple, which is a little less than a quarter of an inch in diameter, strongly fragrant. It appears to be of the Baldwin variety.

© 1876 SCIENTIFIC AMERICAN, INC.

COMBINATION CHAIR AND SECRETARY.

We illustrate herewith an ingeniously constructed piece of furniture, which combines the conveniences of an arm-chair, secretary, writing table, drawers, etc., with those of a work table, scrap bag, needle and thread repository, and other appliances of the sewing room. The whole is portable, occupies but little space, and may be moved as easily as any simple household article of corresponding size.

The arm-chair, together with the case or secretary, is supported on a rectangular base frame, A. The legs of the chair rest directly upon the floor so as to ensure steadiness. Casters are provided on the legs beneath the table, so that, by lifting the chair end, the whole piece of furniture may be easily rolled about, even when the secretary is loaded with books, as the weight comes immediately above the casters. Drawers are placed, as shown, beneath the seat of the chair, and open sidewise. The inside of the secretary is arranged with movable pigeon holes for papers etc., which can be taken out, so that this space can be used as a lady's work receptacle.

The front drawer, B, serves, when open, as a support for a front folding leaf. The side drawer, C, holds pen and ink. An extension, D, on top of the secretary, is attached to the back of the arm-chair to strengthen the same, and is bracketed to support the rear folding leaf of the table. An extension bellows-shaped portfolio, E, is placed in rear of the case, and may used as a newspaper receptacle or scrap bag The arrangement of the folding leaves of table, D, is optional, as they may be hinged at the front, back, or end edge of the top,and may be used for various purposes, as may be desired. The door of the case is made double, and divided by horizontal strips, F, into secret compartments for money or valuable papers, and is closed by a tightly fitting piece which locks into the side of the door.

The device may be appropriately finished and decorated so as to constitute an attractive and ornamental piece of furniture. Patented through the Scientific American Patent Agency, September 2, 1873. For further particulars relative to sale of patent or royalties, address the inventor, Mr. George C. Taylor, Thibodeaux, La Fourche Parish, La.

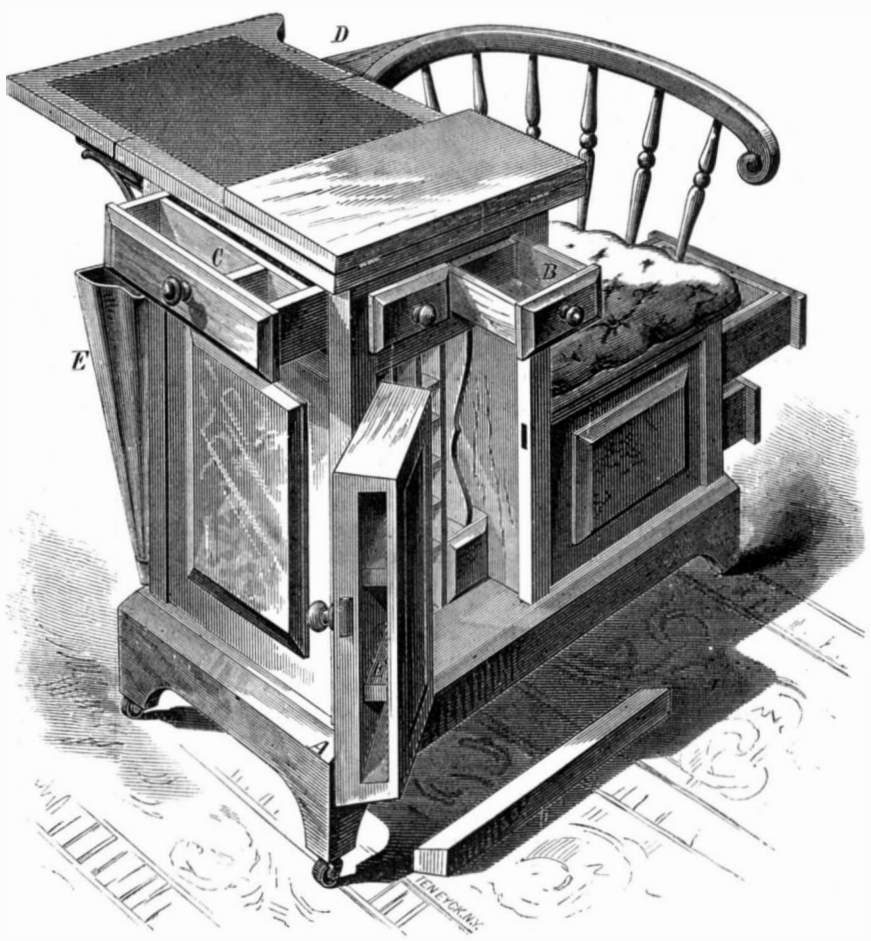

TAYLOR'S COMBINATION CHAIR AND SECRETARY.

A Mouse Plague.

The Scotch farmers appear to be at their wits' ends for means of ridding themselves of the vast armies of mice which are threatening to overrun the border country. The land is represented as resembling the ground in the neighborhood of targets for rifle practice, being literally riddled with holes. All the vegetation is destroyed in certain localities in Teviotdale, not merely the blades of grass, but the roots also,having been consumed. The farmers are encouraging the increase of hawks, owls, weasels, and other carnivorous birds and beasts.

R. HOE & CO.'S IMPROVED INSERTED SAW TEETH.

Since the introduction of inserted teeth for circular saws, their employment has steadily increased, and promises still to do so. In a plain or solid circular saw, the destruction of one or two teeth necessitates the filing down of all the others to the size and radius of the broken ones, and a continuous reduction in diameter accompanies the wear of the saw. It is necessary, in order to maintain the circumferential speed of the saw, to alter the sizes of the driving pulleys, which in turn involves a change in the length of the driving belt; and it is to these defects and inconveniences that the success of inserted teeth is mainly due. In the forms at first adopted for inserted teeth, the sockets in the saw blade are found to become gradually enlarged from the pressure, notwithstanding the spring of the blade, which for some time takes up the wear, and the teeth consequently get loose. Another and very serious objection to the ordinary form of inserted teeth, as compared with the new system illustrated in our engraving, lies in the fact that when, from the breakage of a few teeth, it is necessary to reduce the remainder, to make the saw run true and all the teeth perform cutting duty, the clearance of the teeth becomes so greatly reduced that it is necessary in some way to restore it. To accomplish this result, special swages were invented; but the action of these swages is to spread the front of the teeth by upsetting the metal at the cutting edge; and a fatal objection to this is that, as every machinist knows, by this disturbance of the grain of the steel, its strength is greatly reduced and its cutting qualities impaired. The practical result of course is that the corners of the teeth break off when in use, especially upon coming in contact with knots. If new teeth are inserted, instead of the damaged ones, the process becomes expensive; and the new teeth still require filing down to run true with the remainder, so that the swaging process, with all its imperfections, is generally applied.

In the present form of the inserted teeth, which is an improvement of the form shown on page 322, volume XXXII, the cost of insertion is reduced to a minimum, because the most expensive part, that is the socket, is not subject, except in exceptional cases,to wear or breakage; and the form of the cutting point or chisel bit is so simple that its cost is trifling. As a consequence, in case of breakage it is simply necessary to insert new bits, and not to file down and swage the whole of the teeth to accommodate the defects of a few damaged ones: thus not only is time saved, but the life of of the teeth is greatly prolonged. In our engraving, one tooth is shown in the process of being inserted, and another in its proper position; and it will be observed that they are firmly locked in the saw without the use of either rivets or keys. The wrench used for this purpose has two projecting pins, which fit into corresponding holes in the shank as shown in our engraving, and the operation is easily effected by any one. The chisel bits are forged at one blow under a drop hammer, and every part of tooth shank and chisel bit, is made to a standard gage, so as to be entirely interchangeable. The grinding of the cutting edges is done by adjustable machinery, so that uniformity is secured in the keenness of rake, as well as in the width and clearance. The cutting bits, being short, are exceedingly stiff, and they are tempered as hard as a carpenter's chisel. They may be ground three times, which makes four runs for the teeth, before being worn out; and each tooth in the saw will, it is claimed, cut from one to two thousand feet of lumber, depending upon the quality of the logs and the amount of feed carried.

The saws are made from 13 to 6 gage in the thickness, and from 12 to 72 inches in diameter, the smaller sizes being admirably adapted for edging and gang saws. For further particulars, address R. Hoe & Co., 504 Grand street, New York city.

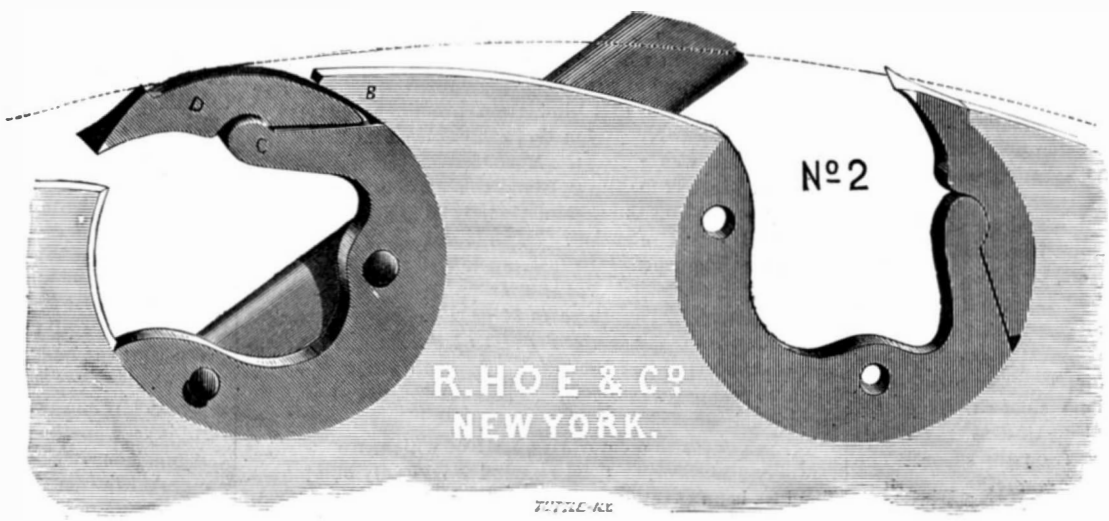

R. HOE & CO.'S IMPROVED INSERTED SAW TEETH.

New Improvements in Aerated Bread Making.

Aerated bread derives its name from the fact that its manufacture is carried on by a process in part the same as that employed for making aerated water. In the case of aerated bread we have a mechanical process, and in the case of fermented bread a chemical process; so that perhaps machine bread would be a better name for the former product than the title now given to it. Some improvements in the manufacture have lately been introduced in England, which we are informed are of a very important character, since they admit of the production of whole meal or brown aerated bread. The improvements, which are described in the English *Miller*, consist in what is technically called the "wine process," and consists in forming a wine from malt by mashing, and afterwards setting up the vinous fermentation in closed vessels. Four gallons of the so-called wine is mixed with the necessary water for a sack of flour, drawn into a closed vessel, and aerated. It is then mixed with the flour (also in strong, closed vessels), and kneaded by arms driven by machinery. The dough formed is drawn off by machinery (thus dispensing with any intervention of the human hand) into the required loaf sizes, and at the same moment, as the carbonic acid gas passes out of it, the dough is raised and vesiculated, and ready for the oven, the whole time required for forming a sack of flour into loaves not being more than half an hour. The effect of the new wine process on the flour is, we understand, that the gluten cells of the starch are softened and broken up, and the dough is thus entirely altered in its character. Instead of being tough and harsh as formerly, the dough now becomes soft and elastic; it is easily kneaded, requiring only half the power to work the kneading arms, and the atmospheric pressure required in the vessels is only about 20 lbs. to the inch, instead of 90 lbs., as hitherto. The use of such low pressures, besides being a great pecuniary gain, is of considerable importance in giving to the bread a soft and beautiful pile-like texture.

The dough, when prepared by the new wine process, also soaks and bakes with the greatest ease, and at an oven heat of 100° less than the oven heat hitherto required for aerated bread. The starch of the flour is now changed into dextrin, while the gluten is uninjured; and the bread has a sweet and agreeable flavor, free from that acidity and bitterness always more or less present in fermented bread.

The Attendance at the Centennial Exposition.

The attendance at the Centennial Exposition for the one hundred and thirty-six exhibition days, ending and including October 14, aggregates 5,772,448 paying visitors, and 1,362,629 non-paying ones, showing a grand total of 7,088,077 people who have entered the grounds. The Philadelphia *Ledger*, whence we take the above figures, makes a number of suggestive comparisons between them and those representing the attendance at prior world's fairs. It appears that the pay admissions to the Centennial for the 136 days exceed the whole number of pay admissions at the Vienna show of 1873 for 186 days by 2,229,826, and the proportion of non-paying to paying visitors is far less. At the London Exhibition of 1851, 6,039,195 persons, paying and non-paying, attended in 141 days. Our Exposition already exceeds this by more than a million. At Paris, in 1855, the aggregate admissions were 5,162,330 in 200 days; and in London, in 1862, the numbers admitted were 6,211,103 in 171 days—both of which aggregates we largely exceed. At the 1867 Exposition in Paris, 8,805,969 people entered in 217 days. Judging from the present ratio of attendance, there is every probability that a million and three quarters will be added to the aggregate of paying visitors to the Centennial above noted, and a quarter of a million to the others, thus making over nine millions in all for 158 days, Sundays excluded, against the 8,805,969 for Paris in 217 days, Sundays included.

In its pecuniary results, the Centennial largely exceeds those of any exhibition yet held. The greatest return was at London, in 1851, namely, $2,121,610; the next at Paris, in 1867, when it was $2,103,677. The cash receipts for gate money during the 136 days of the Centennial were $2,686,603.75.

ANTS.—A certain way to keep ants from sugar barrels, lard cans, and preserve jars, says one who has tried it, is to tie a string wet with kerosene around the barrel, can, or jar. Repeat the wetting of the string with the kerosene oil every few days.

© 1876 SCIENTIFIC AMERICAN, INC.

THE HEMIPTERA OR BUGS.

The insects of the order *hemiptera*, or half-winged, include all those commonly called bugs, harvest flies, tree hoppers, plant lice, etc. They are sucking insects, having neither mandibles nor *maxillæ* proper, but horny beaks curved along the breast when not in use, containing in grooves a series of delicate, sharp bristles, by which the insects puncture the skins of their victims, They have four wings, of which the upper are generally thick at the base and membranous at the ends, being as it were half *elytra* and half wings, whence the name of the order. In a few species, the wings are all membranous, and some are wingless as the bedbug. They undergo only a partial transformation, the *larvæ* and *pupæ* resembling the adults, except in the absence of wings and in size; in all the stages they live in the same way, and are equally active. One species, the earth bugs (*geocorisæ*) have the *antennæ* exposed and longer than the head; most are terrestrial, but some live on the surface of the water; many emit a disagreeable odor. The wood bugs or *pentatoma* occur mostly in warm countries, where they attain considerable size, and are marked with brilliant colors; they live on the juices of vegetables and sometimes on those of other insects; they exhale a disagreeable odor, and adhere to whatever they touch. The squash bug (*coreus tristis*) and the chinch bug (*lygæus*) are species of this order.

Our illustration shows the *pentatoma grisea*, a family of the wood bugs, which may be seen, De Geer tells us, on the boughs of trees, the young following their parent like chickens after a hen. They are interesting to the entomologist on many accounts; but the gardeners find them by no means attractive. From June into autumn, the fifteen species of *pentatoma* are busy on cabbages and other vegetables, as well as on trees and flowers; vines, beans, and rosaceous plants fall victims to their fatal punctures in their search after sap. The wren and the chickadee are foes to these insects, and may do the farmer good service; but the chickadees have disappeared from many of our cities, owing to the pugnacity of the sparrows. Gardeners employ other remedies against these pests, tobacco fumigation and the application of whale oil soap being the best.

PENTATOMA GRISEA.

THE BURBOT.

The burbot, although a fresh water fish, is a member of the cod family, having the pendent barbs from the chin which distinguish most of the members of the *gadidæ* or codfishes. The burbot is ordinarily from 1 to 2 feet long, the head is flat and smooth, with the gape large, and the mouth filled with small teeth. The color is a yellowish brown, clouded and spotted on the sides, the belly being of a lighter hue. Like the eel, it conceals itself under stones, watching for young fish and insects, and it is very tenacious of life. The flesh is firm, white, and well flavored.

The *lota maculosa*, common in this country, is very similar in appearance and habits to the *l. vulgaris* above described, which is well known in England. Mr. Henry Lee relates, in *Land and Water*, that three of the common burbot were caught in the river Trent, and were offered to the directors of the Brighton Aquarium, and accepted; but before they could be despatched on their journey, the largest of the three (he was but 14 inches long) swallowed his two companions.

The burbot is very hardy, and, like the carp, will live for a long time out of water, if kept moist, and fed occasionally with worms and small fishes. It is said it will thrive in ponds if well fed on bullock's liver, etc. Its growth, however, is probably not very rapid, if the statement be correct that it does not spawn till its fourth year.

The large, three-lobed liver of the burbot has always been regarded as a great delicacy. Black tells of a certain Countess of Beuchlingen, in Thuringin, who spent the greater part of her income on this luxury. This liver was also supposed, according to Marsili, to be an efficacious "love philtre," and the oil from it was esteemed as a valuable emollient of corns and callosities. From the air bladder—small as it is, though large in proportion to the size of the fish—isinglass is made. The skin, cleansed, stretched, and dried, is used by the country people in many parts of Russia and Siberia instead of glass for the windows of their dwellings, and is as translucent as oiled paper. It is also utilized by some of the Tartar tribes as material for their summer dresses and the bag in which they pack their animal skins. The fishermen of the Oder, when they catch more burbot than they can sell, cut the fattest of them into strips, dry them, and use them as matches. The roe, which, by Willoughby's computation, contains about 128,000 eggs, is deemed unwholesome, if not poisonous.

The turbot is also indigenous in almost all the rivers and lakes of Northern Europe, India, and Northern Asia, and also in the Hudson's Bay territories. It is common in Germany, Denmark, Sweden, and Russia, and is especially abundant in the lakes of Geneva and Leman. If it be true that it was introduced into the former from Neufchatel, and thence to Lake Leman, it furnishes a good example of successful acclimatisation or naturalisation. It is also met with in the Italian lakes Maggiore and Lugano, and exists in most of the streams in the east of France, but is not very abundant anywhere in that country. In England it is a local fish, being found chiefly in the northern and midland counties, and especially in the Trent. Mr. Couch suggests that the burbot may probably be an imported fish, and thus has not been generally distributed. From its tenacity of life we may conclude that it might easily be introduced into any deep and slowly moving stream; but, as it is a ravenous devourer of small fry, as well as of fishes of larger growth, its presence in some rivers might not be desirable.

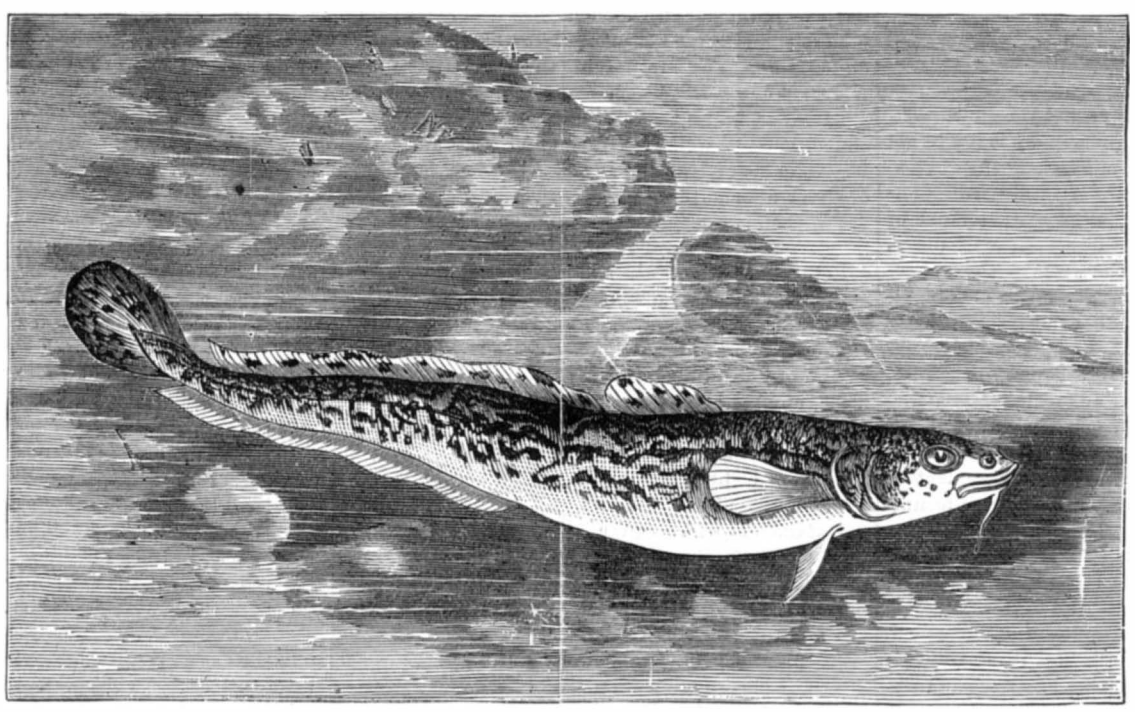

THE BURBOT (LOTA VULGARIS).

Hygeia---The Model City of the Future.

It has recently been announced that a site has been purchased in England whereon is to be erected a model city, conceived by Dr. B. W. Richardson. Dr. Richardson is well known as one of the first sanitarians living, a close and able investigator, and a man whose previous works are of such originality that his suggestion, of even so Utopian a scheme as the one above referred to seems at first sight to be, secures for it thoughtful consideration and possible reduction to practice, where otherwise it might merit but passing notice. Hygeia, as the model city of health is appropriately named, was described in a presidential address delivered by the author before the Health Department of the English Social Science Association, at the Brighton meeting of a year ago. This address, revised, is now published in pamphlet form.*

The population of the model city is placed at 100,000, living in 20,000 houses, built on 4,000 acres of land, an average of 25 persons to the acre. The safety of the population is provided against density by the character of the houses, which ensures an equal distribution of the inhabitants. No tall, overshadowing houses are permitted, and the hight of edifices is limited to 60 feet, or four stories of 15 feet each.

The substratum of the city is of two kinds. At the northern and highest part there is clay; at the southern and southeastern, gravel. Whatever disadvantages might spring in other places, from a retention of water on a clay soil, is here met by the plan of building every house on arches of solid brickwork, through which there is a free circulation of air, and down the incline of which all currents of water are carried away. Three wide boulevards running east and west constitute the main thoroughfares; beneath each is an underground railway for heavy traffic. The other streets at right angles to the large avenues are all wide, and are planted at the sides with trees. Between the backs of the houses are gardens, and other gardens surround churches and similar large buildings which stand alone. No horse cars are to be allowed, the roads are paved with wood set in asphalt, and the pavements, ten feet in width, are of light gray or white stone. The accumulated dirt is daily washed into the subways and thence conveyed away from the city. There are no gutters; and in lieu of the foul sight and smell of unwholesome garbage, there are flowers and greensward. Nor are there underground rooms or cellars of any kind, the living part of every house beginning at the street level. The dwellings in all cases are of brick, glazed so as to be impermeable to water. The bricks are perforated transversely, and at the end of this there is a wedge opening, so that the walls in this way become honeycombed, and admit a constant body of air, which can be heated by the fire grates in the house. The bricks inside the house are decorated, so that no other finish is needed, and the layers of poisonous paper and moldy paste are thus avoided.

The chimneys are all connected with central shafts, into which the smoke is drawn after being passed through a furnace to destroy the free carbon, so that it is discharged colorless into the open air, and its nuisance thus obviated. The roofs of the houses are to be gardens, tastefully laid out. The kitchens, instead of being on the ground floor, are located in the garrets, so that no smell of cooking is ever disseminated through the houses and the transportation of food is rendered easier, since the heavy dishes are taken down and the light, empty ones only carried up. No carpets are permitted, the floors being of hard wood, and kept clean by beeswax and turpentine, by which process the air is ozonized and rendered fresh. Twelve hundred cubic feet of air is allowed to each sleeper in bed rooms, and from the sleeping apartments old clothes, etc., are rigorously excluded. Lifts are provided for transporting material from floor to floor, and the heating apparatus consists in an air box in every room, which, distinct from the chimney, communicates by an opening into the outer air, and by another opening into the room. When the fire in the grate in the room heats the iron receptacle, fresh air is brought in from without, and is diffused into the upper portion of the apartment.

All pipes enter the houses from beneath; and as they pass through the arched subways, access to them is always convenient. The brick sewers run along the floors of the subways and empty into three cross main sewers. They are trapped in each house, kept well flushed, and ventilated into tall shafts by pneumatic engines.

As regards the personal habits of the population, drinking and smoking will be unknown, for saloons and tobacconists' shops will be excluded. Working men and women

*Macmillan & Co., N. Y. publishers

© 1876 SCIENTIFIC AMERICAN, INC.

will not be permitted to carry work home, but must hire workrooms in buildings set apart for that purpose. There is a great deal of good sense in this provision. Dr. Richardson says that work carried into squalid tenements is often a cause of the spread of disease. "I, myself," he adds, "have seen the half-made riding habit, that was ultimately to clothe some wealthy damsel, act as the coverlet of a poor child stricken with malignant scarlet fever." In order to avoid dissemination of disease by soiled linen, public laundries are established under municipal direction, and to these alone must be sent such clothing as is not washed at home. Public hospitals are established in various parts of the city. We have not space to enter into the details of these, and it will be sufficient to say that their planning is the result of Dr. Richardson's long experience in the great city of London hospitals. There are no insane asylums, and no poor houses; the few who would occupy such institutions are to be placed in houses licensed as asylums, but in no wise different from other buildings in the city. No persons are to be "badged and badgered as paupers," the author significantly remarks.

Of course the model city contains baths, gymnasia, public libraries, art museums, in brief all requisites for mental and physical culture. There is a municipal medical staff, under whose supervision every assumable disease and probable cause of disease is subjected to investigation. The sewage is conveyed to a farm and utilized; the water supply is uncontaminated and led always through iron pipes. An immense ozone generator makes ozone, which is "laid on" in private houses for disinfecting purposes. All animals for food and the modes of slaughtering them are under rigid inspection, and the killing is preceded by rendering the brutes insensible by passing them through a "narcotic chamber." Finally, there are no marked graves, no reserved spaces in cemeteries. The dead are buried in wickerwork coffins, which, with their contents, decompose and mingle with the earth. The only memorial monuments are tablets in a spacious covered hall or temple.

Dr. Richardson stops here, for he reaches the confines of his legitimate territory as a sanitarian. His plan, he says, will reduce the rate of mortality to 8 per 1,000 of the inhabitants for the first generation, and to 5 per 1,000 eventually. That this is a vast decrease is obvious when we compare this ratio with that of New York city, where, according to the latest statistics, the weekly mortality averages 82 per 1,000. But need we stop here? Certainly the inventor can step in where the hygeist ends; and may not this model city of health be the model city where are congregated the newest triumphs of inventive genius? There, perhaps, will be located the telegraph which, already in existence, enables us to transmit sound, and so hold converse over long distances, or to lead music into our houses as easily as the water or gas; there will be congregated all those wonderful automatic appliances which reduce the manual drudgery of housework to little more than mere supervision; in those underground railways, we may hope to see speed attained beyond all precedent, yet at no sacrifice of safety; there arms of metal controlled by electricity, by steam, by compressed air, by hot vapor, will relieve arms and muscles of flesh and blood; and then, physical labor being reduced to its minimum, may we not look for that cultivation of the intellectual man which shall lead to still greater attainments? Will not means be devised for developing our dual brain? May we not hope to use our left hand as easily as our right, our feet as advantageously as our hands, in all species of that which is now called handiwork? And then what higher race of men will be evolved by heredity, surrounded by such environment? Is not Dr. Richardson's Hygeia, after all, but the first step toward the rapid development of the future perfect man?

MINERALS AT THE CENTENNIAL.

Much disappointment has been expressed by many in not finding a better display of American minerals at the Centennial. We take an honest pride in the natural productions of our country, and perhaps we had expected too much of it, and hence the disappointment. Another cause of disappointment lies in the arrangement; there are a great many fine minerals scattered here and there, all over and in all the buildings, which, if brought together and systematically arranged, would make a fine show. The present arrangement, which is geographical, is of course the best for exhibitors, for each State and country gets due credit for what she exhibits; it is also the best for any one wishing to learn what may be the mineral wealth of a given State; it is interesting to those about to emigrate; but for the student of mineralogy, the order followed in our museums and technical schools is better.

THE MINERAL ANNEXE.

If we enter the mineral annexe at its eastern extremity, and pass down towards the Chinese exhibit of teas, figures, and curiosities, we find ourselves in the section devoted to the various States, beginning with that of Illinois. This State makes rather a poor show of minerals, with the exception of lead ores, especially of galena, of which there are some fine crystals, also calcite. The collection of antiquities from this State is, however, very fine. Next we see a large block of crude native sulphate of soda (Glauber's salts), some 4 feet square, from Wyoming territory. This block was taken from a deposit of 100 acres in extent and 10 feet thick, and appears to be quite pure. Pennsylvania follows, and its exhibit consists mostly of coal, iron, and oil, with some geological models, and a series of preparations made by Professor Schorlemmer, of Owens College, Manchester, England, illustrating the composition of petroleum.

Michigan is next, and far exceeds in interest any of the above. Her specialties are native copper and silver, which are well represented here. First we see a cubical mass of copper, 3 feet on a side, which has been cut from a mass weighing 76 tuns. Then we have ancient stone tools used by a prehistoric race for working the copper; copper minerals of different kinds; a conglomerate containing 5 per cent of copper; a large number of chlorastrolites, a green mineral peculiar to the Lake Superior region; native silver, and a set of miniature tools, like those now used in copper mining, made from the native silver and copper just as it comes from the mine; iron ore, and a geological section of the iron district; lastly an Indian canoe 10 feet long, made of birch bark.

The next State is Missouri, where lead and zinc abound. Here are some coal fossils of *lepidodendron*, also malachite, azurite, kaolin, geodes of amethyst, and other minerals. The zinc ores, from Dade county, and blende, from Joplin and Graten, are especially worthy of notice.

Ohio is chiefly noticeable for the mound builders' relics, a very large and fine display being made by the State Archæological Association, and another by L. M. Hoseas, of Cincinnati. Some of these indicate the possession of considerable skill and taste on the part of the extinct race that once inhabited that region. The building stones of the State are shown in the Ohio State building.

Next in order is Wisconsin, with her iron, lead, zinc, and copper. Here is a huge mass of smithsonite, or carbonate of zinc, which the miner calls dry bone, from its peculiar appearance. Here, too, are tools made of stone and of copper, which carry us back to prehistoric races.

Iowa is chiefly noted for its display of coal and lead. The geological formation is illustrated by a cabinet in which thin strips of the rock in each strata are placed one above the other, in cases 6 feet high and 18 inches wide. There are 12 of these cases, in which are shown all the various formations, from the St. Peter's sandstone up to the drift. Here for the first time are seen some skulls of the mound builders, also some large geodes.

Indiana exhibits kaolin in large quantities, also coal and iron ore. Delaware also exhibits iron and kaolin. The Schuylkill Company exhibit a block of coal weighing 14 tuns 13 cwt., in this annexe, and here, too, is some statuary marble from Rutland, Vt., with photographs of the quarries. It seems surprising that so few mines, mills, or quarries have thought it worth their while to procure photographs of their works, for they both attract attention and impart, in an easy way, a deal of information.

The west end of this annexe is devoted to the Chinese and to some process for making artificial stone, by the aid of steam and carbonic acid.

In the smaller mineral annexe is a cabinet, showing a section, in miniature, of the Warrior coal measures of Alabama. The South Carolina exhibit embraces a model of the washers used in preparing nodules of phosphate of lime mined by the Charleston Mining Company on the Ashby river, S. C.

The most attractive exhibit in this building is that from Mount Union College, Ohio. It embraces a gorilla from Western Africa, a koala from Australia, an ant eater from Brazil, a kangaroo rat from Australia, and a *galeopithecus* from the Philippine Islands.

A few States, including Kentucky and Tennessee, have their exhibits in the United States Government building; others, New York among the number, have none worth mentioning. Kansas and Colorado have their minerals with their other products, including Mrs. Maxwell's animals, in their own State building. Colorado is particularly rich in minerals, and an enterprising dealer has constructed some toilet or jewel boxes, which he has covered with Colorado minerals, and these he sells in large numbers at the Colorado building. The prettiest of these minerals is the green felspar, known as amazon stone, which is found almost exclusively at Pike's Peak. Silver ores in abundance are also shown here, as well as tellurium minerals and many others less valuable or beautiful. About the door lay huge masses of silver ore and bituminous coal.

THE MAIN BUILDING.

Returning to the Main Exhibition Building, we find there a collection of Rhode Island minerals, very creditable to that little State; also some interesting relics, arrow heads, hatchets, etc., from the same State. There is a pretty good collection of Californian minerals, said to contain 17,000 specimens, number of species not stated.

From Maryland, we have some handsome *verde antique* marble, chromic iron sand from Delaware county, Pa., and crystals of bichromate of potash made from it.

The Passaic Zinc Company, of New Jersey, exhibit some fine specimens of calamine, also zincite and willemite, together with the metal made by them from these ores. The Corroding Lead Company exhibit pigs from the furnace, refined, soft, and desilverized lead, flake litharge, slag, skimmings, dross, regulus from matt, etc.

Joseph Wharton, Camden, N. J., makes the best and almost the only exhibit of nickel ores, ordinary nickel ore, pyrrhotite and millerite, and a set of salts, anodes, etc.

Not far from here is a model of a portion of an anthracite colliery, the Warton vein, Beaver Brook Pa., on a scale of 30 feet to the inch. The superincumbent strata being partly removed, the coal bed is exposed, showing the dip, synclinal, anticlinal, slopes, galleries, coal breakers, and other important parts, carefully labeled and intended for educational use.

There is a curious stone here from Mumford, Munroe county, N. Y., which consists entirely of vegetable petrifactions, chiefly leaves and twigs. Although it looks very fragile, it must possess considerable strength, for we are told that a church has been built entirely of this stone. Adjoining this is a large mass of infusorial silica, the so-called electro-silicon, from Nevada. This substance consists entirely of the siliceous remains of microscopic animals, and presents, when viewed under the microscope, many beautiful forms. Its chief uses are in the manufacture of dynamite, and as polishing powder.

Adjoining this again is a large and beautiful collection of American minerals, with a few foreign ones, exhibited by Professor A. E. Foote, of Iowa. Most conspicuous among these is the green amazon stone from Pike's Peak, Colorado. Then come some very powerful natural magnets, from Magnet Cove, Ark., a great variety of quartz crystals, single and in masses from the Hot Springs, a crystal of smoky quartz which is four feet long, from Pike's Peak, rose quartz, amethyst, petrified moss, green wavellite (unusually fine), native copper, petzite, stalactites and stalagmites, agates, landscape marble, etc. There is also a set of specimens put up for students' use, which embraces many rare minerals, and yet comes within the reach of almost every one.

In a cabinet by itself is a collection of minerals from the line of the Texas and Pacific railroad, also collected by Professor Foote. The most beautiful or rare are the turquoise and embolite (chromo-bromide of silver), from New Mexico, sylvanite (telluride of gold and silver), from Colorado, and moss agate, from Texas.

Iron and coal, as well as the precious metals, have been treated of elsewhere from an economic point of view; but we cannot refrain from calling attention to an unusually large, hollow mass of hematite iron ore, which constitutes a small cave with jet black walls, that look as if they had been varnished.

THE UNITED STATES GOVERNMENT BUILDING.

Carefully guarded in a fireproof safe are several of those exceedingly rare crystals, namely, pure gold. Not far from these are specimens of silver ore, valuable but not very beautiful, from Comstock and other celebrated lodes. Here, too, are many fine specimens of the purest sulphur, borax in abundance, and many other things which will be very valuable when civilization, now on its western march, shall have reached their hiding places. We also notice some large aerolites.

In cases against the walls are arranged some loan collections worthy of notice, especially those of Messrs. Jefferis, Perry, & Wilcox, of Philadelphia. One crystal of apatite, 4 or 5 inches long and 2 inches thick, was quite unequaled anywhere else. Mr. Fletcher makes a creditable exhibit of minerals from Bergen Hill, some of which are very beautiful.

CANADA.

The Canadian mineral exhibit is in the Main Building, and has been pronounced by competent judges one of the best on the grounds. Apatite, amethyst, native copper, iron, coal, and oil really deserve more notice than our space at present permits.

FOREIGN EXHIBITS.

Of the South American countries, Chili stands first. The collection of Emilio Escobar, embracing 445 specimens, is valued at $30,000. It consists chiefly of native silver and silver ores, including several specimens of beautifully crystalized proustite or ruby silver (sulphide and arsenide of silver), from Chañarçillo. Some of the crystals are over 3 inches long; the finest specimen is valued at $4,000. The copper minerals are also very beautiful, especially the atacamite (chloride of copper), malachite (carbonate of copper), and many others; also cobalt ores, borates, sulphur, cinnabar, etc. The process of amalgamating silver ores is exhibited in a separate building, near the glass house.

Brazil and Mexico make a very fair show. The Mexican marbles, from their rare beauty, attract much attention. A single mass of metallic silver 6 feet in diameter, weighing 4,002 lbs., and worth $72,000, attracts much attention from its value.

Russia is the only European country whose mineral exhibit fairly represents her mineral wealth. The exhibit from the Museum of the Imperial School of Mines is very fine. Beginning with native platinum and its associate metals, palladium, rhodium, iridium, ruthenium, etc., we next see some beautiful specimens of *aqua marina*, a bluish-green variety of beryl, emeralds, garnets, and zircons. Ouvarovite, an emerald green garnet, named after the Russian minister Uvarof, large pieces of jasper, nephrite, and topaz, in crystals 6 inches long, are some of the curiosities of the collection. The crystals of pure white rock salt, and of mica, are worthy of notice. Malachite, *lapis lazuli*, rhodonite, and labradorite, the great Russian specialties, are represented here; but a much finer display is made by Hoessrich & Woerffel, who exhibit a large number of articles made from these beautiful stones, such as vases, table tops, cabinets, mantlepieces and jewelry.

Practical Germany limits her mineral exhibit to products of use in the arts: amber, lead ores, petroleum, and Stassfurt salts. The collective exhibit of potassium and magnesium salts from Stassfurt is very complete, tastefully arranged, interesting, and instructive. Their discovery has created a revolution in the alkali industry, and it is now no longer necessary or profitable to destroy fine forests to obtain our supply of potash.

Great Britain makes a very poor show. Some bricks and tiles, chalk and cement, some polished granite from Aberdeen, and we have done. Italy is rather better, for she exhibits a fine collection of polished marbles, besides sulphur and alabaster.

The exhibit of Hawaii, although small, is very interesting, embracing as it does several sets of volcanic minerals and

© 1876 SCIENTIFIC AMERICAN, INC.

lava from the crater of Kilaura. Among these is a bird's nest, made of pelee's hair, a substance resembling our mineral wool, and formed in an analagous manner, by the wind blowing over melted lava.

Diamonds in the rough, and diamondiferous soil with a diamond in it, are shown in the pretty little exhibit of the Orange Free State.

There are a few minerals scattered about elsewhere, but none of much value

CENTENNIAL NOTES.

The Siamese exhibit, which has been six months on the way to the Exposition, has arrived, and is located in the Navy Department section of the Government Building. The collection was made under the direction of the King of Siam, and is a present to the United States. Whatever might have been its original condition, the present state of that portion of it which is visible is sad to behold. Under a covering of canvas there lie bundles of apparently broken parts of wagons, a couple of rude wheels, dried palm leaves and other vegetable products, and a countless number of *et ceteras*, massed together and seemingly defying any attempt to resolve them into order. On the tables near by are displayed several curious peaked and pointed head dresses covered with spangles and gilding, and a collection of models of the long low snake-like boats peculiar to the Malays. All are tarnished and dingy, and the marks of a severe voyage and not over gentle handling are everywhere apparent.

THE GERMAN EXHIBIT

was so mercilessly criticised in the letters sent home by Professor Reuleaux, the chief German commissioner, that it has become rather the fashion to speak slightingly of the display as a whole. This is decidedly unjust, for there are very many admirable features, amply sufficient to compensate for the over-abundance of effigies of Kaiser William and Bismarck, and the exhibit of cheap jewelry and chromos. For instance, there are Count Wermgerode's reproductions, in cast iron, of many famous works of art. These consist of helmets, shields, sword hilts, pitchers, urns, and plates, covered with exquisitely molded figures in bas relief. The casting is remarkable for its perfection in details, and will be quite a revelation to most foundrymen. One plate is left just as it was taken from the mold, with much of the sand still clinging to it, and the sharpness of outline attests the excellent work of both molder and founder. The objects are finished with a coating of brown powder, so that they cannot be distinguished by the eye from real bronze, while their cost is of course much cheaper. The ivory display is also very fine. Above the tall ebony case in which the objects are placed is a large pair of elephant's tusks, surrounded by smaller tusks, graduated according to length, and terminating in the short tusks of the walrus. Within the case are pianoforte keys, billiard balls, combs, chessmen, and a handsome collection of carved articles. A curious species of ivory is also exhibited in the long straight spiral horns of the narwhal or unicorn fish of the northern seas.

Germany gives to her pottery from the Royal Porcelain Manufactory, Berlin, the post of honor in the center of the building. To describe this superb display is scarcely possible, since the exquisite delicacy and artistic coloring of the ware render each piece an object of high art. Many of the vases are of very large dimensions, indicating the great skill brought to bear in their molding. The chemical exhibit in the German Department we have already described in other articles. Perhaps the most instructive contribution in the whole large display is one of the coal tar distillates and aniline colors, so arranged as to show the progress of invention in drawing from the dull heavy coal tar its oils, and then the beautiful shades of red, violet, blue, green, and orange, and finally that great triumph of the chemist's skill, alizarine or artificial madder, which surpasses the true madder root in brightness and fastness of color. The success which so far has rewarded investigators leads to the belief that the problem of manufacturing artificial indigo will be solved. One of the latest discoveries in the field of coal tar colors is eosine, which promises to supersede the costly cochineal.

There are three exhibitors of paraffin and mineral oil manufactured from peat. This industry is, in Germany, confined to Saxony, and the total annual value of the product is about $4,000,000. The oils are mainly used for lubricating purposes, the poorer sorts alone being employed for the manufacture of illuminating gas and stearine candles. One very large block of stearine is exhibited, which is nearly a pure white A large display is made of the famous Johann Maria Farina cologne. The descendants of Farina claim to be the only possessors of the secret of making the perfume. We shall describe other interesting German articles in future articles.

In the Italian section there is a model of

A NEW JURY RUDDER,

a sketch of which, Fig. 1, we give herewith. It is always customary for vessels to carry to sea the material for making a temporary rudder in case that very important appendage should become disabled, and there are many ingenious inventions for putting together spare spars and pieces of timber in rudder form. When the new rudder is made, however, the difficulty is by no means surmounted. The problem then is how to get it in place; and when a ship is rolling heavily in the trough of the sea, this is an exceedingly troublesome and perilous operation. The plan proposed by M. Raffaelle Cagliesi, of Ancona, offers first a simple construction, which is such that the device may be folded into a very small space, and so easily stowed; and, second, an easy means of shipping the rudder. The appliance is made of heavy iron plates pivoted, like a fan, to a recessed block of metal at the center of an iron post, A. The upper plate is fast to the post and the others may be folded up beside it, so

Fig. 1.

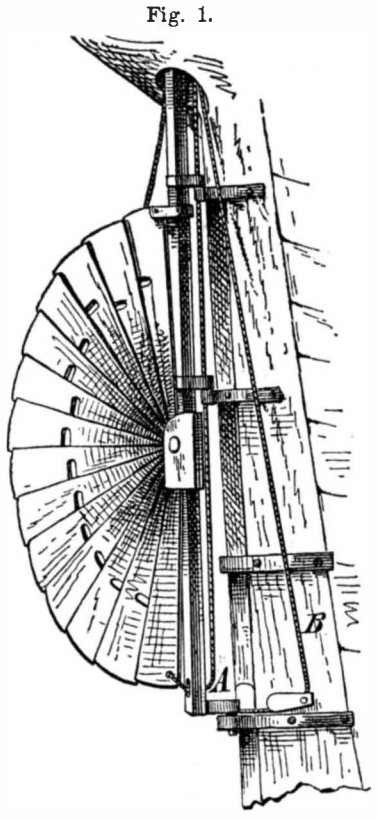

that when the device is thus placed it may be passed downward through the rudder hole. On the post are pintles which slip into gudgeons on the stern post, thus hinging the rudder in place. And also on the stern post is a sheave, B, through which a chain or rope is kept passed; so that, when it is necessary to place the rudder in position, one end of this rope is attached to the lower pintle, and by pulling on the other end the pintle is quickly drawn into the socket. In the lower part of the post, A, there is a sheave through which another rope, attached to the lower rudder plate, is rove, and which likewise leads up through the rudder hole By pulling on this after the rudder is placed as described, the fans or plats are expanded as shown, while they may be closed to remove the apparatus by means of a rope shown on the opposite side.

In previous articles we have described the growing South African industry of ostrich raising, which, it has been suggested, might be successfully carried on in this country. In the annexed engraving is represented

THE LEVIATHAN INCUBATOR

(exhibited in the Cape of Good Hope section), wherein the huge eggs are hatched. The apparatus consists of a middle steam chamber of metal (Fig. 2), which is kept constantly

Fig. 2.

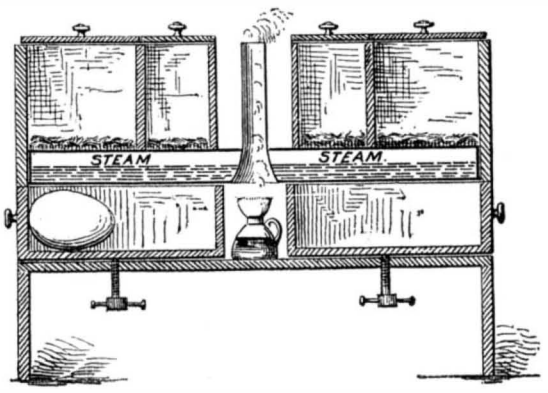

hot by a lamp or furnace beneath. Below this are drawers in which the eggs are first placed, and these, by means of the screws shown below, may be raised until the eggs are brought almost in contact with the warm surface above. In these receptacles the eggs are kept for two weeks at a temperature of 102° Fah. They are then removed and placed in the inner pair of compartments, shown above, for another

Fig. 3.

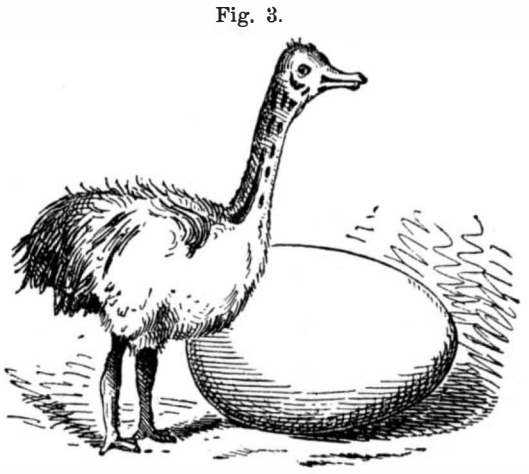

fortnight, at a temperature of 100°. At the end of this period the eggs are carefully extracted, and a small hole is chipped in each shell at the point opposite the chick's head. They are next replaced and kept in the same compartments for two weeks longer at 98°, when the hatching takes place, and the young birds are placed in the outer upper receptacles, and there remain for two days. The compartments above, it should be noted, have bottoms of lamb's wool, which come in contact with the steam chamber below.

The two days' old chick is also represented in the engraving, Fig. 3, beside an egg, so as to show the relative size. The egg is about 7 inches in length and the bird some 13 inches in hight. The chick is fed on rice, and when it reaches the age of seven days is worth $50 in gold. Nearly 20,000 birds, we are informed, have been hatched at the Cape of Good Hope by apparatus of this description. The machine is frequently made of sufficient size to hold 115 eggs at a time.

ASTRONOMICAL NOTES.

OBSERVATORY OF VASSAR COLLEGE.

The computations and some of the observations in the following notes are from students in the astronomical department. The times of risings and settings of planets are approximate, but sufficiently accurate to enable an ordinary observer to find the object mentioned. M. M.

Positions of Planets for November, 1876.

Mercury.

Mercury should be looked for before sunrise during October and the first half of November. On November 1, it rises about 5 A. M., and sets at 4h. 15m. P. M. On November 30, Mercury rises at 7h. 4m. A. M., and is too near to the sun to be seen.

Venus.

Venus is still brilliant in the morning, rising on the 1st at 2h. 58m. A. M., and setting at 3h. 15m. P. M. On the 30th, Venus rises at 3h. 58m. P. M., and sets at 2h. 45m. P. M. Although its apparent diameter is much smaller than in the summer, it is still a very beautiful object, and can be seen all through the month. On the 28th, Mars, at this time very small. can be recognized by its nearness to Venus.

Mars.

Mars is one of the planets visible to the naked eye, but it is very small in November, and can be seen only in the morning. It may be known from the circumstance of its keeping nearly the same diurnal path with Venus, at a little less altitude.

Mars rises on the 1st at 4h. 14m. A. M., and sets at 3h. 47m. P. M. On the 30th, Mars rises at 3h. 56m. A. M., and sets at 2h. 37m. P. M On November 28 Mars and Venus will have nearly the same right ascension, and will pass the meridian with only a few minutes difference of time.

Jupiter.

Jupiter is very little seen in November. In the early part of the month it sets about 6h. 10m. P. M., and can be seen in the southwest immediately after sunset. On the 30th, it rises at 7h. 26m. A. M., and sets at 4h. 39m. P. M.

Saturn.

Although Saturn is low in altitude (in this latitude not above 26° for the whole month of November) it is much the most interesting object in the evening sky. With a telescope of low power, its wonderful ring can be seen, and at least one of its many satellites. On the 1st, Saturn rises at 2h. 16m. P. M., comes to the meridian at 7h. 30m., and sets at 43m. after midnight. On the 30th, Saturn rises at 23m. after noon, comes to the meridian at 5h. 38m., and sets at 10h. 53m. the next day. Saturn is among the stars of *Aquarius*, but so much brighter than even the brightest of the constellation as to be readily known to be a planet.

Uranus.

On November 1, Uranus rises a few minutes after midnight, but a short time before the bright star Regulus, and 1½° north of it in declination. The planet can perhaps be found by its nearness to this bright star; it approaches the star until the 29th. On the 30th, Uranus rises at 10h. 15m. P. M., and sets at 11h. 58m. the next morning.

Neptune.

Neptune rises on November 1 at 4h. 41m. P. M., and sets at 6h. 1m. of the next morning. On the 30th, Neptune rises at 2h. 45m. P. M., and sets at 4h. 3m. the next morning. This planet is so far distant from the earth that it can be seen only by means of the best telescopes.

Sun Spots.

The report is from September 28 to October 17, inclusive. The photographs of September 28 and September 29 show two large groups of spots coming on. These were seen till October 3; but after that date, clouds prevented observation and photographing till October 9, when the sun's disk appeared to be free from spots. On October 13 a group of small spots was seen on the western limb. These had not been discovered before, probably on account of clouds. This group was last seen on October 17, but, contrary to the usual behavior, it had appeared to increase in size as it approached the limb. The return of this spot may be looked for after two weeks.

Small Arms for Russia.

Smith & Wesson, Springfield, Mass., have a new contract with the Russian government for 20,000 pistols, which are to be the same as those they have making, and include the automatic ejector. The firm have now manufactured some 130,000 for this government, their first contract being taken in 1871. This contract, by the way, was concluded for the government by a gentleman bearing the euphonious name of Captain N. Kouschavewitsch.

THE Australian gum tree, *eucalyptus globulus*, well known for its antiseptic qualities, has recently been found to yield a fragrant resinous oil, containing a substance homologous to camphor.

© 1876 SCIENTIFIC AMERICAN, INC.

Patent Law Reform in England.

At a recent meeting of the British Association at Glasgow, a paper was read "On Recent Attempts at Patent Legislation," by Mr. St. John Vincent Day. In the discussion which followed, Mr. F. J. Bramwell spoke at some length. It seems to be thought, he said, that lawyers have a special claim to dominate in patent legislation, perhaps on account of the great gravity of the legislation which arises out of patents. This notion of excessive litigation in reference to patent matters is absolutely unfounded. An eminent barrister connected with patent litigation, when it does arise, had assured Mr. Bramwell that on an average of many years only nine patent actions or suits go to the stage of a primary decision in each year; and an examination of the files of the *Times* for the year ending November, 1874, showed the accuracy of the statement which had been made. Mr. Bramwell then proceeded to the question of the official examinations into novelty and frivolity. He had long had very great doubts whether it is desirable to make an examination even into novelty; but if such an examination be made, the very first care must be to appoint a sufficient number of men of scientific attainments or of good experience. This is a difficult task in itself; even when the greatest care has been taken, it is certain that some mistakes will be made, and some hardships will be suffered, and we have to consider whether the advantages to be attained are sufficient to justify the risk. After all, what is the benefit to be derived from an examination into the novelty of an invention? Sometimes, it is said, it is to protect the inventor. The answer to that is that, if you make the inventors into classes separate from the community at large, the inventor says: "For heaven's sake, leave us alone; we not need to be protected against ourselves." But others put the desirability of the examination into novelty on broader grounds. They say it is undesirable that a patent should be granted for a thing which is not new, because the public may thereby be prohibited from using something which the patentee claims as his invention. The answer to this is that a patent granted for a thing which is not new is, if not void, voidable, and then in truth a very small amount of harm results. Mr. Bramwell then went on to illustrate his meaning by reference to the inventions of James Watt, Dr. Potts (the inventor of the method of driving piles by the exhaustion of the air), and Dr. Siemens, all of whom he urged would, probably, have been refused a patent, by the examining body. It appeared certain that we should not have an examination as to frivolity; and if we were to have an examination as to novelty, that examination should be fenced with precautions to prevent an inventor being injured by a wrongful decision. It was recommended by the committee of the Society for the Amendment of the Law that a patentee should have, notwithstanding the adverse report of the examiner, a right to demand his patent if he still so pleased, but that the specification should have appended to it the decision of the examiner, and that any person bringing an action under such a patent should be compelled to give security for the costs; and that in the event of his failing, and failing on the grounds put forward by the report of the examiner, he should pay the whole costs of his opponent as between solicitor and client, and not the mere taxed costs. Some protection such as this against the mistake of novelty examiners was absolutely necessary.

REMARKS.—In this country we have had the system of official examination in vogue for forty years; and if it were possible for Englishmen to learn anything, they might profit from our experience. In the early days of our system, it was the common practice of the Patent Office to reject even highly meritorious inventions; just as they now do at the Prussian Patent Office. But that method gave great dissatisfaction, and was so discouraging to inventors, and so obviously contrary to the spirit of the Constitution, that it had to be abandoned. At present the examinations are substantially limited to the ascertainment of identities of inventions. If the invention for which a patent is asked is identical with one already patented, the petition is rejected. If there is an iota of difference, the new patent is allowed. This is the only safe rule to follow; it works well, and gives satisfaction; except in cases where the examiner is so stupid as to be unable to see the difference between tweedledum and tweedle-dee. Property in patents never commanded such high valuations here as at present, notwithstanding the fact that the number of issues, now nearly 15,000 a year, is steadily increasing. The Supreme Court of the United States taught our patent officers a good lesson concerning the necessity of liberality to inventors, when it forbade the practice of citing old rejected cases against new applicants. This decision so limits the scope of official examinations that they are of no special importance now, if indeed they ever were; and nobody would be hurt if the system were abrogated. We agree with Mr. Bramwell that a patent granted for an old invention is good for nothing, and the issue of such a patent does very little harm.

Chromic Inks.

As long ago as 1848, Professor F. Runge invented what he called a chromic ink, from its containing chromate of potash. His directions for its preparations, published at the time in Dingler's *Journal*, were as follows; A decoction of logwood is first made in the proportion of 10 to 80, that is 10 lbs. of logwood is boiled with enough water to produce 80 lbs. of the decoction. To 1,000 parts of this logwood extract, when cold, is added 1 part of yellow chromate of potash, stirring rapidly. It is ready for use at once. Gum and other additions are injurious, he says, to this ink.

The following year W. Stein proposed an improvement on Runge's ink, saying that the great fault of this ink was that it soon became thick, like sour milk. This he overcame by adding four grains of corrosive sublimate to each bottle. This would restore thick ink to its pristine quality, and improve its color changing it from deep indigo blue to pure black.

In 1867, C. Puscher described a new ink similar to the above, made as follows: Boil 10 ozs. of logwood in 20 ozs. of water, then boil again in 20 ozs. more of water, and mix the two decoctions; add 2 ozs. of chrome alum and boil another quarter of an hour. One oz. of gum arabic is added, and we have 25 ozs. of deep black ink.

Böttger says that a simple method of preventing gelatinizing in chromic ink is to add to the water in which the extract is made some carbonate of soda. His method of operation is as follows: Dissolve 15 parts of extract of logwood in 1,000 parts of distilled water to which 4 parts of carbonate of soda has been added at boiling heat, and add 1 part of yellow chromate of potash dissolve in a little water.

Recent American and Foreign Patents.

NEW MECHANICAL AND ENGINEERING INVENTIONS.

IMPROVED SHOVEL-GRINDING MACHINE.

William A. Meyer, North Easton, Mass.—This consists of a series of swinging shovel-blank-supporting frames, that are journaled in a shaft placed on pivoted and spring-acted standards. The blank holding frames and standards are supported on a traversing carriage that feeds the blanks successively to a rapidly revolving and adjustable grindstone, that grinds the entire surface of the blanks. There is a revolving eccentric cam, supported on a pivoted and sliding carriage, which is capable of being moved toward or from the shovel frames, as required, by the articles to be exposed to grinding.

IMPROVED BOAT-DETACHING APPARATUS.

William A. Brice, London, England.—This detaching apparatus remains intact and locked as long as there is strain on the suspended rings, but is instantly released when the strain is taken off by the raising of the boat by the wave. It was described and illustrated on page 150, volume XXXV.

IMPROVED MACHINE FOR SAWING STAVES.

Benjamin H. Catching, Forest Grove, Oregon.—A band saw, or a saw of similar form in two parts, is fitted on an oscillating circular head, on each side of which is a saw table and feed carriage. The carriages are worked by weighted cords, and the saw tables have grooves in the under side for gaging the work to the saw, the guide being shifted from groove to groove as each stave is sawn off. A special advantage is that one part of the saw cuts while the other part is on the back stroke.

IMPROVED REVOLVING EARTH SCRAPER.

Benjamin Slusser, Sydney, Ohio.—This invention relates to certain improvements in revolving earth scrapers designed for general purposes of excavating and moving dirt; and it consists in the particular construction and arrangement of the scraper proper, made of a single sheet of steel bent so as to secure the best results in lightness of draft and perfection of filling, and provided with racking runners and an end board of peculiar arrangement, intended to improve the operation and increase the durability of the device. The invention also consists in the improved arrangement of the scraper with respect to its frame, the said scraper being pivoted therein upon double pivots, which are shifted from the front to the rear of the center of gravity, according to whether the load is to be transported or the scraper dumped by revolving.

IMPROVED NAIL PLATE FEEDER

Rollin Van Amburgh, Wetmore, Kan.—The novel points of this feeder rest in the construction and arrangement of the devices attached to the barrel for feeding the nail plate to the knife, and in the means for reversing the barrel before applying its tapered mouth to the knife, which reversing movement is effected through the instrumentality of a band, and a reciprocating block moving on a spirally flanged or auger-shaped shaft.

IMPROVED CAR COUPLING.

Samuel Hamer, Salt Lake City, Utah Ter.—This combines a buffer arrangement with the drawhead and coupling. It consists of a spring-acted drawhead, with interior separately movable drawbar, to which a coupling spring hook is pivoted. The drawhead has a top shoulder that comes in contact with an auxiliary spring bolt, and acts as a buffer head.

IMPROVED HAY ELEVATOR AND CARRIER.

Joshua Anderson, Short Creek, Ohio.—This invention consists in the construction of the carriage and its arrangement to the track or way upon which it runs, the same being so constructed and arranged that the elevation of the load of hay in the fork trips the carriage and allows it to move upon the ways, and the load is held in its position near the carriage by a retaining device independently of the draft rope, so that it cannot sway to the floor again when the carriage is set free.

IMPROVED ANVIL.

James Jenkins, Cortez, Nevada.—This inventor has devised a means of repairing old and worn-out anvils cheaply, and thereby economizing metal, now lost when the face is worn down so as to be unfit for further use. It consists of a steel face and swage block, secured on the top of the anvil by a metal strap, screwed detachably to its sides, and fitted down the sides and under the bottom of the anvil, to which it is fastened. Keys are fitted between the block and the hollow face of the anvil, to support it firmly. The connection of the attaching strap to the sides of the block is such that the block can be reversed to use one side for the anvil face, and the other side for the swage block.

IMPROVED RESAWING MACHINE.

Thompson M. Newman, Gallatin, Tenn.—In this device, a rotary saw on a vertical arbor is arranged between two tables which are supported on screws so that they can be shifted up and down to vary the thickness of the stuff. They may also be inclined to the saw for sawing bevels, and have feed rollers geared by countershafts and belts, with the main horizontal driving shaft mounted in the lower part of the frame and turning the saw arbor by bevel gears.

NEW MISCELLANEOUS INVENTIONS.

IMPROVED MACHINE FOR CURLING FEATHERS.

Johann Hawlowetz, New York city.—This consists of a revolving curler, in connection with an apron running over a driving roller, an adjustable stretching, and a swinging and spring-acted roller.

IMPROVED HEEL EVENER FOR BOOTS AND SHOES.

Abram Dilley, Drakestown, and John L. Larrison, Schooley's Mountain, N. J., said Larrison assignor to said Dilley.—As an improved heel evener for shoes and boots, that may be readily set to keep the heel lever for any tread of the foot, the inventor provides two wedge-shaped rubber plates, that are applied by a center pivot to the insole and heel, and adjusted by upward projecting side lugs at their thickest part.

IMPROVEMENT IN PURIFYING IRON AND MAKING STEEL.

John L. Randall, Albany, N. Y., assignor to himself and Stephen Munson, same place.—This consists in treating molten cast iron, while in a receiver, with pulverized titanic or equivalent iron ore, potassic ferrocyanide, and potassic nitrate. The process allows of using old as well as new material, utilizing refuse metal the vitality of which has been nearly destroyed, restoring it to a high standard of excellence. By the said combination of materials also a superior and uniform grade of metal, suitable for extra fine castings, is produced, which may serve as a substitute for steel.

IMPROVED COMPOSITION FOR ARTIFICIAL MARBLE.

Louis De Planque, New York city, assignor to himself and Francis Strom, same place.—The composition consists of plaster of Paris dissolved in whey, under admixture of starch, glue, and sulphate of zinc. The mass is cast and pressed into molds, in which it remains a few hours until completely hardened. It is taken out of the molds when hard and polished. Any imitation of marble or other stone may thus be produced.

IMPROVED SHOW CARD FOR BUTTONS AND LIKE ARTICLES.

Charles A. Righter, New York city.—The buttons are attached to small cards, each card holding one dozen buttons. The cards have pointed ends which slip into slits in the large supporting card.

NEW HOUSEHOLD INVENTIONS.

IMPROVED MOSQUITO NET FRAME.

Edward S. Lathrop and Louis Salvaterre, Savannah, Ga.—This mosquito net frame is designed to be applied to a bed or crib, and adapted to be extended with a mosquito netting canopy, which it carries across the bed to protect the occupants. It may also be readily drawn back by the occupants while in bed. It consists mainly of a pair of lazy tongs, one on each side of the bed, and so combined with a supporting standard, attached to the bedstead and the mosquito netting, that the latter may be readily extended across and enclose the upper portion of the bed, or be drawn to one end of the bed and out of the way.

IMPROVED WINDOW MIRROR.

Carl A. Demling, New York city, assignor to Anthony Demling, same place.—This is an improved reflecting mirror for the windows of buildings, by which the street in both directions and the door of the house may be observed by a person sitting at the window without the necessity of leaning out. It consists in connecting window mirrors to a sliding sleeve by a ball and socket joint, so as to make them adjustable in any desired direction.

IMPROVED BOSOM-IRONING BOARD.

Luther A. Van Kuren, Binghamton, N. Y.—In this device, the bosom is, by means of a swinging bar, readily stretched to the required degree of tension, and tightly held for being ironed until released by the raising of the bar.

NEW WOODWORKING AND HOUSE AND CARRIAGE BUILDING INVENTIONS.

IMPROVED WAGON END GATE.

Zaccheus C. Wilson, Nokomis, Ill.—The object here is to furnish end gates for wagon bodies, so constructed, for convenience in dumping grain, that they may be opened and put out of the way without being detached from the said bodies, and in such a way as to leave the open ends wholly unobstructed. When closed they are firmly held in place, so that they cannot be pressed open by the load.

NEW AGRICULTURAL INVENTIONS.

IMPROVED SEED PLANTER.

William F. Finney, East Castle Rock, Minn.—This machine, for planting corn, beans, sorghum, broom corn, and other seeds, is so constructed that it may be readily arranged to plant the seeds at any desired depth, that the plows may be easily raised from the ground, and so that the operating mechanism may be readily thrown into and out of gear with the driving wheel.

IMPROVED COTTON AND CORN PLANTER AND FERTILIZER DISTRIBUTOR.

William Scott, Fredericksburg, Va.—The invention consists in attaching two or more adjustable hoppers to a main shaft composed of two opposite equal arms, connected and made extensible by a central sleeve provided with a slot and clamp screw. Said main shaft has its bearings in vibrating side bars, pivoting at their front ends on the inner surfaces of the side bars of the main frame of the machine, and their free rear ends controlled by limiting pins fixed to said main frame, which is extensible longitudinally, and provided with the usual shovels, coverers, handles, and marker.

IMPROVED STRAW CUTTER.

Amasa Heverly, New Albany, Pa., assignor to himself and Philo Mingos, of same place.—In this cutter the knives are made with convex edges, and are attached to a bevel-toothed wheel running against the mouth of the cutter box. Springs are attached to the inside of the cutter box at a suitable distance back of the cutters, and converging toward, and terminating a little in advance of, the cutters, to open and close on the material being cut according to its volume, and to confine it mostly at the middle of the range of the cutters. Through this arrangement it is claimed that the machine works better and easier than when the box is open across the whole breadth, while the stalks are free to be urged away to the outer portion of the cutters.

IMPROVED COMBINATION AGRICULTURAL TOOL.

Maynard Reynolds, Manchester Depot, Vt.—This is an improved shank, so constructed as to receive and securely hold a hoe, a weeding hoe, a potato hook, and a rake, in such a way that the said tools may be attached and detached by simply tightening and loosening a screw. A hoe, a narrow or weeding hoe, a potato hook, and a rake are designed to be made and sold with the handle. By this construction, by simply loosening a hand screw, either of the tools can be detached, and another inserted in its place, so that the farmer or gardener need buy but one handle or shank for a set of tools.

IMPROVED DEVICE FOR PICKING COTTON.

Richard A. Cutliff, Shreveport, La.—The process of picking cotton by hand is slow, tedious, and expensive, and machines for the purpose have failed to come into extensive use, first on account of their cost, and secondly their imperfect operation. The patentee has therefore devised a cheap but efficient means for facilitating hand picking, and the same consists of gloves or other hand coverings, provided with fangs, hooks, or claws, by which the cotton may be rapidly removed from the bolls. To free the cotton from the fangs or claws, a brush is provided, the same being attached to the body of the picker, in a convenient position to allow the gloved hands to be passed across and in contact with it. The cotton, thus removed from the fangs by the brush, rolls off and falls into a bag or basket, which is also strapped to the body of the picker.

© 1876 SCIENTIFIC AMERICAN, INC.

The AMERICAN CENTENNIAL, 1876

Wheeler & Wilson Victorious!

Again the WHEELER & WILSON Sewing Machines triumph over the world. The Centennial Commission have officially announced the awards, and decreed for the new Wheeler & Wilson Machine *two Diplomas of Honor and two Medals of Merit*. This is a double victory, and the highest award which it was in the power of the Centennial authorities to bestow. No other sewing machine received such a recognition. More than thirty of the best producers of machines in this and other countries entered for competition, and at Philadelphia in 1876, as Vienna in 1873, and at Paris in 1867, Wheeler & Wilson lead the list. After a careful, rigorous, and exhaustive examination, the judges unanimously decided that the superior excellence of these machines deserved more than one medal or diploma, and, consequently, they recommended *two of each*. The Centennial Commission unanimously ratified the action of the judges, and the public will indorse the decision of these ablest of mechanical experts. A claim of equally distinguished honor for any other sewing machine is only an attempt to hoodwink the people. Read the following, which stamps the "New Wheeler & Wilson" as the *Standard Sewing Machine of the world.*

[*From the Official Report.*]

AWARDS TO WHEELER & WILSON.]

1. A Medal and Diploma for "The New Wheeler & Wilson Sewing Machine," for the following reasons:

> "*A Lock-stitch Sewing Machine unsurpassed in the fine workmanship of its parts, great originality, great adaptability to different kinds of work both in cloth and leather, beauty of stitch, ease and rapidity of motion, and completeness of display.*"

2. A Medal and Diploma for "The New Wheeler & Wilson Sewing Machine" for Leather, for

"*Superior quality of work in Leather Stitching.*"

[Exchange.

Business and Personal,

The Charge for Insertion under this head is One Dollar a Line for each insertion. If the Notice exceeds Four Lines, One Dollar and a Half per Line will be charged.

7,000 lbs. per hour, Ore reduced in 9 tun Pulverizer! Illustrated circulars. Farrelly Alden, Pittsb'gh, Pa

Agricultural Implements and Industrial Machinery for Export and Domestic Use. R. H. Allen & Co., N. Y.

Town and Village Hand Fire Engines, with hose carriage and fittings, only $350. Send for cuts and full information. S. C. Forsaith & Co., Manchester, N. H.

Grain Driers—Parties who use them extensively will please send address to Hersey Brothers, cor. 2d and E Streets, South Boston, Mass.

Magic Lanterns, Stereopticons, and Pictures for Parlor Entertainments and Public Exhibitions. Pays well on small capital. 74 Page Illustrated Catalogue free. Centennial Medal and Diploma awarded. McAllister, M'f'g Optician, 49 Nassau St., New York.

Wanted—Lathe, 48 in. swing, heavy, short bed, new or good 2d hand. Hull & Belden Co., Danbury, Ct.

1,000 New Sewing Machines, Lock Stitch, handsome and attractive. Closing business. Will exchange all or part for Machinery or Merchandise, D. S. M. Co. Danbury, Conn

Noiseless Exhaust Nozzles for Exhaust Pipes and Pop Valves. T. Shaw, 915 Ridge Av., Phila., Pa.

Must be Sold, and at a Bargain, for Cash—A Steam Wagon or Motor, belonging to an Estate. Address J. H. Kenyon, Plainfield, New Jersey, where it can be seen, or W. S. Combs, St. Paul, Minn.

Shop Stoves—Brazil Foundry, Brazil, Indiana.

Boiler Punch Lathes, 9 ft. Planer. Brooks & Winebrener, 261 North 3d St., Philadelphia, Pa.

Fire Hose, Rubber Lined Linen and Cotton, finest quality. Eureka Fire Hose Co., 13 Barclay St., New York.

Split-Pulleys and Split-Collars of same price, strength and appearance as Whole-Pulleys and Whole-Collars. Yocom & Son, Drinker St., below 147 North Second St., Philadelphia, Pa.

At a Bargain—Centennial Exhibition Shafting. Four lines of 2½ and 3 in., complete. 65 ft., 105 ft., 120 ft., and 170 ft. A. B. Cook & Co., Erie, Pa., or D. 9, 72, Machinery Hall.

For 13, 15, 16 & 18 in. Swing Engine Lathes, address Star Tool Co., Providence, R. I.

The Scientific American Supplement—Any desired back number can be had for 10 cents, at this office, or almost any news store.

Latest and Best Books on Steam Engineering. Send stamp for catalogue. F. Keppy, Bridgeport, Conn.

D. Frisbie & Co. manufacture the Friction Pulley—Captain—best in the World. New Haven, Conn.

500 new and second hand machines at low prices, fully described in printed lists. Send stamp, stating just what you want. S. C. Forsaith & Co., Manchester, N.H.

Patent Scroll and Band Saws, best and cheapest in use. Cordesman, Egan & Co., Cincinnati, Ohio.

Chester Steel Castings Co. make castings twice as strong as malleable iron castings at about the same price. See their advertisement, page 301.

To stop leaks in boiler tubes, use Quinn's Patent Ferrules. Address S. M. Co, So. Newmarket, N.H.

Water, Gas, and Steam Pipe, Wrought Iron. Send for prices. Bailey, Farrell & Co., Pittsburgh, Pa.

For Solid Wrought-iron Beams, etc., see advertisement. Address Union Iron Mills Pittsburgh, Pa. for lithograph, &c.

Solid Emery Vulcanite Wheels—The Solid Original Emery Wheel—other kinds imitations and inferior. Caution.—Our name is stamped in full on all our best Standard Belting, Packing, and Hose. Buy that only. The best is the cheapest. New York Belting and Packing Company, 37 and 38 Park Row, New York.

M. Shaw, Manufacturer of Insulated Wire for galvanic and telegraph purposes, &c., 259 W. 27th St., N. Y.

F. C. Beach & Co., makers of the Tom Thumb Telegraph and other electrical machines, have removed to 530 Water Street, New York.

Lathe Dogs, Expanding Mandrels, Steel Clamps, &c., for Machinists. Manufactured by C. W. LeCount, So. Norwalk, Ct. Send for reduced Price List.

Driving Belts made to order, to accomplish work required. Send full particulars for prices to C. W. Arny, 148 North Third St., Philadelphia, Pa.

Power & Foot Presses & all Fruit-can Tools. Ferracute Wks., Bridgeton, N.J. & C. 27, Mchy. Hall, Cent'l.

The "Abbe" Bolt Forging Machines and the "Palmer" Power Hammers a specialty. Send for reduced price lists S.C. Forsaith & Co., Manchester, N.H

Seamless Bag Machinery.—Send Circulars to Andrew Dow, 277 Madison St., New York.

"Dead Stroke" Power Hammers—recently greatly improved, increasing cost over 10 per cent. Prices reduced over 20 per cent. Hull & Belden Co., Danbury, Ct.

Steel Castings, from one lb. to five thousand lbs. Invaluable for strength and durability. Circulars free. Pittsburgh Steel Casting Co., Pittsburgh, Pa.

For best Presses, Dies, and Fruit Can Tools, Bliss & Williams, cor. of Plymouth and Jay, Brooklyn, N. Y.

For Solid Emery Wheels and Machinery, send to the Union Stone Co., Boston, Mass., for circular.

Hydraulic Presses and Jacks, new and second hand. Lathes and Machinery for Polishing and Buffing metals. E. Lyon, 470 Grand Street, New York.

Diamond Tools—J. Dickinson, 64 Nassau St., N. Y.

Shingle, Heading and Stave Machine. See advertisement of Trevor & Co., Lockport, N. Y.

Notes & Queries

Will G. W., of New Haven, Conn., who observed the shock of the Hell Gate explosion, let us know if his watch was keeping New Haven time, and if, subsequently to the explosion, he ascertained the error of his watch?—W. W. W., of St. Louis, Mo., should consult an expert.—C. N. B. will find a description of a sun dial on p. 409, vol. 29.—G. L. W. will find directions for making Vienna yeast on p. 185, vol. 30.—A. B. will find directions for soldering gun barrels together on p. 353, vol. 27.—A. T. L. will find directions for annealing glass chimneys on p. 42, vol. 26.—J. J. B. can waterproof cardboard by following the directions on p. 17, vol. 33.—C. A. W. will find directions for polishing gun barrels on p. 11, vol. 32.—E. B. H. will find directions for lacquer on iron on pp. 243, 312, vol. 34.—M. G. will find directions for gilding without a battery on p. 116, vol. 32.—J. R. B. will find directions for making salicylic acid on p. 324, vol. 32.—M. will find directions for kalsomining on p. 351, vol. 24.—H. D. O. can clean the silver rims of his show cases by the process described on p. 251, vol. 33.—A. R. can use celluloid as a substitute for wood in inlaid work. See p. 23, vol. 33.—A. T. T. will find an answer to his query as to the cannon on a car on p. 273, vol. 32.—A. S., who does not give his name or address, will find that the proportions of wagon axles are given on p. 299, vol. 34.—I. R. C. will find a recipe for indelible ink on p. 129, vol. 28. A good recipe for a soldering fluid is given on p. 251, vol. 28. For a cement for mending china, see p. 379, vol. 31. For a cement for leather, see p. 119, vol. 28. For a silver-plating solution, see p. 408, vol. 32.—C. A. K. will find directions for transferring prints to wood on p. 138, vol. 30.—W. F. S. will find a full explanation of the processes for refining petroleum on p. 340, vol. 26.—F. B. will find a description of a magnetic engine on p. 241, vol. 33.—J. A. S. will find full descriptions of plans for lacing belts on p. 244, vol. 34.—F. N. P. will find a description of the paper process of stereotyping on p. 363, vol. 30.—G. H. P. will find directions for bronzing on brass on p. 51, vol. 33. For blacking brass, see p. 362, vol. 25.—S. G. C. will find a description of the century clock on p. 688, vol. 2, SCIENTIFIC AMERICAN SUPPLEMENT.—A. P. H. will find descriptions of several ice machines on p. 40, vol. 35.—G. W. A. should try some of the anti-incrustators advertised in our columns.—J. K. will find directions for putting a white enamel on watch dials on p. 107, vol. 30. For gold dip for brass, see p. 116, vol. 33. For silvering brass, use the solution described on p. 408, vol. 32. For black surface on brass, use the process given on p. 362, vol. 25.—O. Z. will find a recipe for stove cement on p. 183, vol. 34.—W. B. W., E. T. H., J. C. W., J. S., J. G. A., W. D., C. S. P. F., A. L. N., R. N., W. M., and many others who ask us to recommend books on industrial and scientific subjects, should address the booksellers who advertise in our columns, all of whom are trustworthy firms, for catalogues.

(1) F. G. asks: How do manufacturers make the stain with which they finish tool handles, etc., of a bright yellow? A. Use raw linseed oil 1 gill, dragon's blood and yellow ocher equal parts, and enough to color the oil; mix together, and rub on with a clean rag. Let stand for 3 or 4 days, give a coat of the oil only, lay by for a week, and polish with a dry rag.

(2) N. P. M. says: It is a principle in heating and ventilation for cold air to fall and heated air to rise; with this principle in view, how can it be possible that the higher above the earth we go, the colder is the air? A. The atmosphere is supposed to be about 50 miles in hight and lies in various strata of different densities, the heaviest nearest to the earth. There is a theory that the sun's rays are not necessarily charged with heat and light, but that these phenomena are generated by the friction or union of said rays with the particles of the air or with grosser material objects. According to this theory, the denser the air the greater the friction, and consequently the greater the prevalence of heat near the surface of the earth. Heat, it is true, has the property of expanding air, and through this means there are continually ascending currents; but this action is limited, for, being soon deprived of their heat by the cooler strata they meet with, they eventually find the position proper to their natural density. The same effect is observed in the air confined in a room; the warm air rises, is cooled, and falls to the floor, and upon being again warmed repeats the course. Indeed, by observing the bubbles of air in boiling water, we are furnished with an ocular demonstration of this action.

What produces sudden cold spells in our climate? A. The changes from heat to cold and the reverse action, which are so common in our climate, are no doubt frequently caused by the great agitation of the air currents, when seeking to form an equilibrium in the temperature of the great body of air surrounding the earth. But there are occasions when these sudden changes do not seem to be fully accounted for by this cause, when the air seems to glow with heat; and these may be attributed to electrical and magnetic currents, a knowledge of the action of which we have not yet fully mastered.

(3) M. G. asks: Is it proper to call the copper wire enclosed in gutta percha, that they used in blasting at Hell Gate, a fuse? A. No. The fuse is the tube containing the cap and a quantity of some explosive.

(4) E. W. T. says: 1. Is there electricity on telegraph wires when all the keys except one are closed? A. If there is a battery connected with the wire, the wire will receive a charge from the battery even if a key be open at some other point on the line. There would be no current, however, unless the keys were all closed. 2. Are telegraph wires (on account of their connection with batteries) more liable to be struck with lightning than other wires of equal hight? A. No, not in the slightest degree.

(5) L. G. ask: Have the last observations on the transit of Venus been reduced, so as to determine the sun's parallax? A. We believe that two or three have been reduced as an experiment to see what the result would be; but it was not materially different from that now used by the Bureau of Navigation, which is 8·848″ as the sun's mean horizontal parallax.

(6) H. C. G. asks: What can I put in flour paste to prevent its souring and not injure it? A. Brown sugar, corrosive sublimate, and oil of lavender.

How many gallons water does a 20 horse power steam boiler use per hour, at moderate speed? A. That depends upon what kind of an engine it is supplying. In ordinary practice, it would range from 50 to 250 gallons.

How far from the reservoir can a steam pump be situated to work well? Can it work well at 375 feet distance? A. It can be made to work at this distance, with a suction pipe of ample size, carefully laid.

(7) W. J. M. asks: Will steam, passing in jets between the piston rings and cylinder of an engine crease the cylinder? A. Yes.

(8) E. B. C. says: I have two cells of gravity battery. How much will a magnet made of 1 lb. of No. 10 copper silk-insulated wire lift? A. You cannot lift much with two cells of gravity battery, nor with helices made of No. 20 copper wire. If you want to lift heavy weights by electricity, cover your iron cores with No. 14 copper wire—using 150 feet—and employ a dozen of the large size carbon cells. The horseshoe form is best, with an armature.

(9) H. H. B. asks: What size of wire do I want for winding telegraph magnets for a resistance of from 1 mile to 12? A. The wire should be copper, No. 30 gage. 2. How should it be wound? A. It must be wound in layers, as close together as possible. The best plan would be to buy one already wound, as they can best be wound by machinery and can be bought at small expense. 3. Should the wire be insulated from the magnets on which it is wound? A. It should be insulated with silk.

(10) J. L. B. says: I have a short telegraph line about ⅛ mile in length. I have 3 learner's instruments on different points on the line. It takes three cells of the Daniell battery to work it. My experience is that with a closed circuit the battery gets weaker, or, as operators say, runs down. The batteries require cleaning and use more sulphate of copper and zinc (thus the expense of battery is greater) when circuit is closed. I have arranged a battery at each instrument with a switch, so that I can cut each battery in the line and work it; then cut off the battery and leave the line closed, grounded at each end of course, and in circuit in such a way that an operator at either instrument can cut his battery in the line and work it, and then cut the battery out of line and leave the instrument in. In this way we only have circuit while working, that is, only half an hour or so each day. Which is cheapest, to keep up 3 cells with closed circuit, or 3 in the way in which I am working? A. That would depend upon how much of the time you used the line. If you used it constantly, one battery and a closed circuit would be the cheapest. If you only used it occasionally, the plan you have adopted would be the cheapest.

(11) P. E. I. asks: Are there any methods, other than those laid down in works on navigation, for determining the rising and setting of the moon? A. There are other methods, but we know of none better.

(12) F. T. says: There are four lithographic presses, resting on corks, at work on the fourth floor of a brick building, the rumbling of which does not annoy the artists on the floor below. Since they have been removed into the fifth floor, they make such a noise as to annoy the artists so much that they had to vacate the room. What can be done to stop the rumbling? Deadening the floor will be too expensive. A. There is less weight of wall on the ends of the floor joists of the fifth story than on those of the fourth, and consequently the vibration of the floor is greater. This vibration can be counteracted in a measure by diagonal braces in the story below, extending from the center of the fifth floor beams to the ends of those of the fourth story, provided that the uses of the latter story will permit it.

(13) T. E. asks: What size of boiler will it take to run a small engine, the cylinder of which has a 1 inch bore and 2 inches stroke? A. Make it 10 inches in diameter, 15 inches high.

(14) G. W. K. asks: How are turbine water wheels tested? A. The ordinary method is to measure the power exerted by means of a friction brake, and at the same time to note the amount of water used, either by actually measuring it, or by observing the hight of the discharge on a weir of known dimensions. Then the actual horse power developed, divided by the total horse power of the water that was used, represents the efficiency of the wheel.

(15) J. M. W. asks: 1. Does nearsightedness, the eyes being used properly and carefully, increase or diminish with age? A. It is apt to increase. 2. Do you know of any remedy? A. No.

(16) O. A. L. asks. Has light of itself any other color than white, or a homogeneous color? Or, in other words, are the different colors of flames caused by light shining upon the smoke which the burning materials produce? A. Rays of light have various colors, depending, according to the undulatory theory, upon the wave lengths of the vibrations producing the light.

Why is it that silk is always twisted in an opposite direction from cotton or woolen thread? A. Because in silk the separate strands are twisted, both before doubling and after.

How can I raise a number to a three and six tenths power by a short method without using algebra? A. Multiply the logarithm of the number by $3\frac{6}{10}$, and find the number corresponding to the resulting logarithms.

(17) L. S. C. says: I wish to cover a long line of steam pipe, to prevent loss of heat by radiation. I have been advised to cover it with a wrapping of paper, then a wrapping of straw, say two inches thick, then another covering of paper, the whole to be covered with some kind of cloth to fasten it. Another party recommends boxing the pipe in and filling the box with ashes. Which plan is the better? A. Either of these methods will answer pretty well, the second being preferable on some accounts.

(18) H. S. says: In your issue of August 12 you refer to a catamaran which vanquished the New York yachts in a recent encounter. Can you give us any idea how and of what she was built, and her size, safety, etc.? A. The vessel referred to was something like a proa, a form of sailing craft that is noted for speed and safety. The boat proper is like the half of a narrow canoe, and a canoe-shaped log is connected, by means of a light framework, to windward. The side to which this attachment is made is always the windward side, the sail being shifted from one end of the boat to the other, when it is desired to go about. See the first page of this issue.

(19) B. R. asks: When there is a steady downward pull, the weight being suspended by the end, and there being no jar, what is the strength of a rod of good malleable iron, compared with wrought iron, rods being of the same size? A. We presume you refer to what is called malleable cast iron. We have seen no record of very reliable experiments on its strength. Professor Rankine gives 48,000 lbs. per square inch, making the result doubtful. Good wrought iron has a tensile strength of from 55,000 to 60,000 lbs. per square inch.

(20) E. H. F. says: 1. I am going to build a canvas boat, and would like some suggestions as to how to proceed? A. The process is quite similar to wooden boat building, the frame being made in the same manner, and canvas being used for sheathing instead of wood. The bottom should be fitted with a light wooden platform. 2. I want the boat to be about 11 feet long How wide and how deep should it be? A. If you want great carrying capacity, make the boat from 4 to 4½ feet wide, and 2 feet deep.

(21) W. E. F. says: The new Independence bell placed in the old State House at Philadelphia is defective in tone. Many of the newspapers have endeavored to show why a bell, twice the size of the old one, cannot be heard so far. Will a bell of the same internal diameter give as high (or sharp) a note (all other things being equal) if its shell is 2 inches thick, as will one whose shell is 1 inch thick? A. The thick bell will make the most vibrations in a given time, other things being equal, and therefore give the higher note.

(22) D. K. says: A friend asserted that the pressure above the water in a steam boiler was not the same in all places; and he cited an instance where a number of steam gages had been put (in different places) on a large boiler, they showed a difference of 5 lbs. pressure. Was that due to a difference of pressure. or was it caused by currents of steam through the boiler? A. There is some difference in the pressure at different hights, not on account of steam currents, but because the pressure at any level is that due to the steam pressure increased by the weight of the water and steam above that level.

(23) E. H. L. says: Philosophers tell us that sound travels at a certain rate. But do some sounds travel faster than others? We were rifle shooting to-day at a distance of 500 yards from a canvas target. A ledge of rock stood 7 feet beyond the target. The sound made by the bullet in piercing the canvas was distinctly heard and recognized, as well as the sound of the bullet striking the rock 7 feet beyond. The precise time which elapsed between the two above-mentioned sounds striking the ears we cannot give, but it was far too long to be in proportion to the distance, difference of distance being only 7 feet. It appears to us that the sounds should almost blend; but at 500 yards distance, there was a lapse of time of at least 1 second. This was repeatedly noticed by different men with different rifles. A. This seems to be beyond philosophy, as stated; at least we cannot offer any explanation. It may be, however, that there are other elements that should be considered. We have heard the successive sounds that you speak of on several occasions, but were always able to account for them quite reasonably. If any of our readers can furnish any notes in relation to the matter, we will be glad to hear from them.

© 1876 SCIENTIFIC AMERICAN, INC.

(24) W. H. asks: Would it make any difference in the speed of 2 rowboats 18 feet long, one having a straight cutwater and the other having a cutwater inclining 4 inches in 18, this being the hight of the boats, other things being equal? A. We scarcely think there would be any appreciable difference.

(25) J. F. N. asks: How can I remove the scale from sheet steel? A. With an emery wheel.

(26) D. R. W. says: We are obliged to use water from a well for watering plants. It forms an incrustation upon the earth and the flower pots, which, we presume, is alkali. Can you recommend anything which we can put into the water to neutralize the alkali? A. It is probably a lime salt. Try the addition of a little clean lime water, allow to stand a short time undisturbed, then pour the water off from the sediment.

(27) H. H. S. says, in reply to G. M. F., who asked if plaster of Paris were suitable for porous cells: Some two years ago I made several cells of Daniell's battery, using plaster porous cups, and found them to work very successfully. These cells were about the cheapest I ever saw. A. If the plaster cells are porous, they will answer instead of porous clay cells.

(28) H. J. says: Some time ago I saw an article in your paper recommending coffee as a disinfectant. It would be very expensive, and I have for years been using coffee grounds after the coffee has been extracted. I dry them and keep them for use. I simply sprinkle them over a hot stove or shovel of coals in the sick room. They would be good for emigrant vessels or hospitals, and might be used to great advantage in the yellow fever districts at present.

MINERALS, ETC.—Specimens have been received from the following correspondents, and examined, with the results stated:

H. S. S.—It contains no silver.—C. H. C.—It is decomposed mica.—C. P.—It is black oxide of manganese.—J. B. H.—It is carbonate of copper with shale.—H. W. S.—Both are sulphides of iron, No. 1 being pyrite, No. 2 marcasite.

COMMUNICATIONS RECEIVED.

The Editor of the SCIENTIFIC AMERICAN acknowledges, with much pleasure, the receipt of original papers and contributions upon the following subjects:

On Aerostation. By J. J. R.
On Celestial Dynamics. By J. W. H.
On Mental Telegraphy. By J. L. M.
On Trisecting an Angle. By P. H. F.

Also inquiries and answers from the following:

F. P.—H. H. L.—V.—R. D.—W. C. K.—N. B. P.—W. L.—W. T.—R. K.—J, C. W.

HINTS TO CORRESPONDENTS.

Correspondents whose inquiries fail to appear should repeat them. If not then published, they may conclude that, for good reasons, the Editor declines them. The address of the writer should always be given.

Enquiries relating to patents, or to the patentability of inventions, assignments, etc., will not be published here. All such questions, when initials only are given, are thrown into the waste basket, as it would fill half of our paper to print them all; but we generally take pleasure in answering briefly by mail, if the writer's address is given.

Hundreds of inquiries analogous to the following are sent? "Who sells the best dies and taps for screw-cutting work? Who makes the best gas apparatus for domestic use? Who sells Centennial bronze medals? Who makes the improved zinc white, described on p. 328, vol. 35? Who makes the best incubators? Who sells the best ice machine?" All such personal inquiries are printed, as will be observed, in the column of "Business and Personal," which is specially set apart for that purpose, subject to the charge mentioned at the head of that column. Almost any desired information can in this way be expeditiously obtained.

[OFFICIAL.]

INDEX OF INVENTIONS

FOR WHICH

Letters Patent of the United States were Granted in the Week Ending

October 3, 1876,

AND EACH BEARING THAT DATE.

[Those marked (r) are reissued patents.]

A complete copy of any patent in the annexed list, including both the specifications and drawings, will be furnished from this office for one dollar. In ordering, please state the number and date of the patent desired, and remit to Munn & Co., 37 Park Row, New York city.

Animal trap, D. Conner	182,897
Animal trap, J. Quigley	182,957
Axle boxes, making, T. V. Le Roy	182,940
Bag fastener, A. J. Palmberg	182,771
Bale tie, L. E. Evans	182,810
Bale tie, W. B. Hazeltine	182,757
Barbed fence wire, P. P. Hill	182,928
Barbed fence wire, C. A. Vosburgh	182,778
Barbed fence wire, T. A. Weber	182,976
Barbed metallic fence, W. H. Gilman	182,817
Barometer, E. C. Wagner	182,779
Bed spring, J. W. Wright	182,982
Blackboard rubber, D. Jackson	182,942
Blast furnace, E. H. Murray	182,947
Blower, A. J. Klinginsmith	182,832
Book binding, Wahl & Smith	182,873
Boot soles, channeling, W. S. Fitzgerald	182,812
Boots, crimping uppers for, C. A. Wheeler	182,978
Boots, manufacture of, J. W. Hatch	182,755
Boots, manufacture of, W. T. Martin	182,941
Boring machine, W. De Sanno	182,902
Bottle stopper, T. A. Weber (r)	7,335
Box scraper, L. Bailey	182,881
Bran-scouring machine, S. C. McMaster	182,841
Brick kiln, W. S. Colwell	182,895
Bristles, etc., cleaning, W. F. Parks	182,849
Buckle, L. Carr	182,688
Buckle, Higinbotom & Smith	182,927
Bung cutter, J. Bowen	182,744
Bung machine, C. Abel	182,786
Butter worker, F. G. Wynkoop	182,785
Can, metallic, J. F. Drummond	182,905
Can, self-opening, T. J. M. Jewell	182,934
Cane and stool, combined, W. D. Taber	182,869
Capstan, W. J. Alrich	182,740
Car axle box, Jansen & Mekeel	182,988
Car coupling, L. Fleckenstein	182,911
Car coupling, H. Sells	182,863
Car coupling, J. S. Williams	182,878
Car roof, H. Aldridge	182,739
Car roof metal, H. Aldridge	182,788
Car spring, W. P. Hansell	182,924
Car wheel, Allen & Pullman	182,789
Carriage step and shank, F. A. Sawyer, 2d	182,963
Cartridge-feeding device, G. P. Salisbury	182,858
Cartridge shells, burring, Salisbury *et al.*	182,857
Case for bottles, etc., G. Wilson	182,784
Chamber bucket, L. C. Batten	182,741
Chandelier, Carter & Brown (r)	7,329
Check rower, W. L. Black	182,796
Chimney top, J. Hessler	182,758
Churn, J. Brown	182,800
Churn, Hubbard & Sterling	182,930
Churn, W. Marvin	182,943
Churn, D. R. Nevitt	182,949
Churn, J. M. Roberts	182,851
Cigar pipe, I. A. Heald	182,821
Cigarette package, H. Maddock	182,765
Clothes wringer, A. Israel	182,931
Coal, economizing, M. B. Eaton	182,809
Cooling animal charcoal, C. H. Hersey	182,823
Corn planter, L. L. Haworth	182,820
Corn planter, H. J. Snyder	182,864
Corset, F. C. Batcheller	182,742
Cotton press, etc., W. M. Penniston *et al.*	182,954
Cotton scraper, L. C. Gillaspie, Sr	182,915
Cow milker, E. M. Knollin	182,763
Cultivator, J. Palcer	182,953
Currycomb, C. R. Taylor	182,969
Die for press dyeing, D. C. Farrington	182,752
Distilling oil, H. C. Rose	182,775
Door check, S. O. Ball	182,888
Door check, W. Cassill	182,889
Dumping car, E. Davis	182,901
Dumping wagon, F. M. Pennebaker *et al.*	182,955
Dust guard for railway cars, E. Leverich	182,939
Dynamo-electric machine, E. Weston	182,977
Earth augers, operating, E. M. Hoagland	182,827
Easy chair and lounge, Nichols & Cain	182,950
Electric coupling, A. Ryder	182,776
Electric pile, J. Cerpaux	182,802
Electro-magnetic governor, Sangster *et al.*	182,859
Evaporating liquids, J. E. Weaver	182,780
Extension chandelier, Browne & Carter	182,799
Eyeglass, I. Alexander (r)	7,357
Fan, automatic, Ruben & Bradshaw	182,961
Feed water heater, J. B. Mitten	182,844
Fence, portable, Martin & Briggs	182,838
Fire bricks, compound, etc., J. Kiernan	182,935
Flower stand, H. B. Adams	182,787
Fly trap, J. M. Scantlin	182,777
Folding chair, F. F. Parker	182,850
Food, preserving, Thoma & Eurich	182,971
Forging horseshoe nails, J. Mills	182,843
Fruit picker, J. C. McEwen	182,840
Fulling mill, R. Eickemeyer	182,909
Furnace, heating, A. Gale	182,912
Furniture spring, J. L. Branson	182,745
Furniture spring, Branson & Juergens	182,797
Game apparatus, S. Noah	182,766
Gas regulator, I. Cook	182,898
Gate, automatic, E. C. Stephens	182,866
Governor, engine, R. W. Gardner	182,816
Grain door, car, Card & Safford (r)	7,328
Hand corn planter, F. Dyer	182,751
Hand power for vehicles, L. R. Converse	182,896
Harness saddle, S. E. Tompkins	182,870
Harness saddle tree, S. E. Tompkins	182,871
Harrow and land roller, W. Gilielan	182,914
Harvester, Clinton & Knowlton	182,803
Hat frames, wiring, R. F. S. Heath	182,925
Hat-pouncing machine, R. Eickemeyer	182,908
Hay and cotton press, Ward & White	182,975
Hay and grain elevator, T. Powell (r)	7,332
Hay loader, W. H. Thurston	182,970
Heatingstove, G. W. Herrick	182,824
Hinge, C. B. Clark	182,893
Hoe, E. Warren	182,875
Holdback, Robinson & Merrill	182,960
Hot air furnace, H. Randall	182,772
Hydrant, Kupferle & White	182,938
Hydraulic jack, etc., M. J. Walsh	182,974
Ingot mold, C. M. Ryder	182,856
Ironing and polishing board, Mooney & Young	182,946
Ironing apparatus, W. Halsted	182,753
Ironing board, A. H. Wilson	182,880
Lamp, C. F. A. Hinrichs	182,825
Lamps to instruments, attaching, E. Ruhlmann	182,855
Lathe attachment, I. Kinney	182,762
Leather-skiving machine, W. S. Fitzgerald	182,813
Loom stop motion, H. Carlon	182,887
Lubricating car axle, B. G. Martin	182,942
Mail bag catch, P. K. Curll	182,805
Match box, J. P. Benjamin	182,884
Match machine, J. Du Bois	182,750
Microscope, E. Gundlach	182,919
Middlings, separator, A. Hunter	182,828
Molding tobacco pipes, J. G. Oliver	182,951
Mortising chisel, E. Cole	182,894
Mower, H. Palmcrantz	182,770
Mowing machine, R. Dutton	182,807
Needle bar and cylinder, etc., J. Heginbothom	182,822
Netting, Chase & Canfield	182,892
Nut lock, B. W. Davis (r)	7,330
Ore washer and separator, G. Laudor	182,764
Ornamenting metal, etc., G. T. Clare	182,748
Paper-cutting machine, W. T. Shaffer	182,964
Parlor skate, W. Lockwood	182,835
Patterns, drafting, Steiner & Lass	182,968
Pigeon hole for papers, J. C. Wigent	182,979
Pin rack, C. Miller	182,842
Pipe cutter, J. Curran	182,900
Pipe for hot air furnaces, W. H. Drummond	182,906
Pipe vise, J. H. Wilkinson	182,788
Pitman for harvesters, J. D. Wright	182,983
Plow, A. Schuetz	182,862
Pocket book lock, E. Schnopp	182,861
Polishing machine, J. Johnson	182,830
Pontoon for raising vessels, W. Foster	182,815
Potato digger, A. Favreau	182,811
Pump, W. Adair	182,737
Pump, I. G. Wheeler	182,876
Railroad rail joint, G. Palmer	182,848
Railroad switch, C. S. Bastright	182,794
Railway tie, L. E. Yates	182,984
Razorback, H. A. Dow	182,904
Regulator, furnace, G. C. Paine	182,769
Relief for air compressors, G. H. Reynolds (r)	7,333
Rivet-heading machine, H. Ruddick	182,962
Rocking chair, F. Mohr	182,845
Roll for welding tubing, M. Blakey	182,795
Rolling band iron, B. Lauth	182,884
Rolling horseshoe nails, G. L. Hall	182,923
Rolling blank nut bars, H. Johnson	182,831
Sack filler and packer, E. M. Whitney	182,877
Sadiron, Z. B. Custer	182,806
Sadiron grinding machine, J. G. Baker	182,882
Safety pocket, G. Palmer	182,847
Sash balance, W. Woodward	182,981
Sash fastener, E. J. Hale	182,754
Saw bench, Rice & Murkland	182,958
Sawing machine, M. T. Boult	182,885
Sawing machine, circular, Hueber *et al.*	182,929
Scale beam, E. A. Rock	182,852
Scoop, A. Button	182,747
Scroll saw, H. L. Beach	182,743
Sealing bottles, jars, etc., C. M. Jacob	182,760
Sectional steam generator, L. F. Renshaw	182,773
Seed cotton gin feeder, C. F. Scattergood	182,860
Sewing machine stop, E. Cornerly	182,804
Sewing machine feed, Williams *et al.*	182,879
Sewing thimble, S. Chard	182,890
Shade holder for lamps, C. Votti	182,973
Shafting, turning, A. Dwelle	182,808
Ships' rigging, setting up, T. F. Hall	182,818
Shirt, S. Gutmann	182,920
Shirt, C.C. & D. W. Noyes	182,768
Shirt and drawers, S. S. Gutmann	182,921
Show case for spool silk, W. G. Kelly	182,761
Sign, A. W. Billings	182,794
Singletree, L. Flatau	182,814
Spinning ring fastening, J. H. Sawyer (r)	7,334
Spirit level, Burlington & Priest	182,801
Spokes, trimming tenons on, L. H. Merriman	182,944
Spring air pistol, W. C. Cross	182,899
Stalk cutter, R. Wright (r)	7,336
Star braid, A. Moll	182,945
Steam boiler scale remover, J. Riley	182,774
Steam generator, G. T. Lauthlin (r)	7,331
Steam heater, J. E. Weaver	182,781
Steam lubricator, F. G. Wiselogel	182,980
Step and hub band, R. McDonald	182,839
Stone compound, J. Kormann	182,937
Stone, dressing, W. J. Macomber	182,837
Stop valve, J. Ward	182,874
Stop watch, H. A. Lugrin	182,836
Street lamp, S. W. Squires	182,865
Studs, winding spiral, D. F. Briggs	182,798
Stump extractor, Balliet *et al.*	182,791
Tan bark, preparing, J. Sherman, Jr	182,965
Thill coupling, J. C. Hendry	182,926
Thill coupling, Osborne & Alexander	182,952
Three horse evener, H. Spunaugle	182,967
Time and combination lock, E. Stockwell	182,868
Toy carrier, J. H. Adamson	182,738
Toy money box, J. W. Hoard	182,826
Trace fastener, E. N. Banks	182,792
Track clearer, J. E. Green	182,917
Trundle hoop handle, J. J. Riley	182,959
Trunk, T. R. Dunham	182,907
Truss, W. A. Turner	182,972
Turbine water wheel, Rose & Jennings	182,854
Umbrella, J. H. Gumble	182,918
Umbrellas, attaching rings to, R. J. Gemmill	182,913
Upright pianoforte action, G. Trayser	182,872
Ventilating mines, W. Greis	182,916
Ventilation, system of, A. B. Brown	182,746
Vignetting printing frame, W. Boyce	182,886
Wagon brake lever, Engle & Snavely	182,910
Wagon brake, W. E. Nash	182,948
Wagon jack, A. N. Price	182,956
Washing machine, Dickason & Barrett	182,903
Watch chain, J. J. Rohrbach	182,853
Water closet tank, H. A. Haugan	182,756
Water cooler, M. De Yonge	182,749
Water elevator, T. H. Hutchinson	182,759
Weather strip, M. B. Smyth	182,966
Wheel plow, E. T. Hunter	182,829
Whiffletree hook, E. C. Knuth	182,939
Whip, D. Avery	182,790
Windmill, A. W. Hall	182,922
Wind wheel, J. J. Kimball	182,832
Window bead fastener, H. W. Stetson	182,867
Window screen, T. Nowell	182,767
Wire fence barb, M. S. Harsha	182,819
Wood-planing machine, A. M. Mortimer	182,846
Wood-planing machine, H. M. Wilcox	182,782
Wood pulp engine, J. Chase	182,891

DESIGNS PATENTED.

9,506.—BAS RELIEF.—A. Carlewitz, Newark, N. J.
9,507 to 9,510.—CARPETS.—J. L. Folsom, Brooklyn, N.Y.
9,511 to 9,534.—CARPETS.—O. Heinigke, New Utrecht, N.Y.
9,535.—CANDY BOX.—J. Hirner, Philadelphia, Pa.
9,536 to 9,551.—CARPETS.—H. Horan, East Orange, N.J.
9,552 to 9,557.—CARPETS.—E. J. Ney, Dracut, Mass.
9,558 to 9,560.—CARPET.—H. Nordmann, New York city.
9,561 and 9,562.—CARPETS.—G. W. Piggott, N. Y. city.
9,563 to 9,566.—CARPETS.—J. H. Smith, Enfield, Conn.
9,567 to 9,571.—CARPETS.—W. H. Smith, Enfield, Conn.
9,572.—CIGAR BOX.—S. S. West, Schoeneck, Pa.
9,573.—HINGES.—C. B. Clark, Buffalo, N. Y.
9,574.—CARAMELS.—G. S. Collum, Hartford, Conn.
9,575.—STOVES.—F. A. Magee, Chelsea, Mass.
9,576.—BRACELETS.—G. G. Miller, Philadelphia, Pa.
9,577 and 9,578.—DECORATING TIN.—S. Van Campen, Rahway, N. J.
9,579.—BRACELETS.—J. Wilkinson, Mount Vernon, N.Y.

[A copy of any one of the above patents may be had by remitting one dollar to MUNN & Co., 37 Park Row, New York city.

SCHEDULE OF PATENT FEES.

On each Caveat	$10
On each Trade mark	$25
On filing each application for a Patent (17 years)	$15
On issuing each original Patent	$20
On appeal to Examiners-in-Chief	$10
On appeal to Commissioner of Patents	$20
On application for Reissue	$30
On filing a Disclaimer	$10
On an application for Design 3½ years)	$10
On application for Design (7 years)	$15
On application for Design (14 years)	$30

THE VALIDITY OF PATENTS.

We recommend to every person who is about to purchase a patent, or about to commence the manufacture of any article under a license, to have the patent carefully examined by a competent party, and to have a research made in the Patent Office to see what the condition of the art was when the patent was issued. He should also see that the claims are so worded as to cover all the inventor was entitled to when his patent was issued; and it is still more essential that he be informed whether it is an infringement on some other existing patent. Parties desiring to have such searches made can have them done through the Scientific American Patent Agency, by giving the date of the patent and stating the nature of the information desired. For further information, address MUNN & CO.,
37 PARK ROW, New York.

Advertisements.

Inside Page, each insertion - - - 75 cents a line.
Back Page, each insertion - - - $1.00 a line.
Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Friday morning to appear in next issue

EMPLOYMENT.
ANY PERSON of ordinary intelligence can earn a living by canvassing for The Illustrated Weekly. Experience is not necessary—the only requisite being, as in all successful business, industry & energy. Send for particulars. Address CHAS. CLUCAS & CO., 14 Warren St., N.Y.

A GENTLEMAN out of business, having about $50,000 to invest, wishes to associate himself with an established concern where from $10,000 to $50,000 increased capital could be advantageously employed. Address CAPITAL, Box 235, Boston, Mass.



Makers also of the Dazzle Black Baking and Self-Drying Japans. These Varnishes and Japans, though CHEAPER in price, are unexcelled in Europe or America, for PURITY, COLOR, and DURABILITY.

Send for Circular and Descriptive Price List.

"LEHIGH EMERY WHEELS
are in every way satisfactory, and for our purposes answer better than any others we have had." BARNES & Co., Syracuse, N. Y., Mowing Knives, etc.
L. V. EMERY WHEEL CO., Weissport, Pa.

Danbury Drill Chucks,
New—1876—Pattern.
GREATLY IMPROVED—ALL CAST STEEL.
PRICE REDUCED TO $8.00.
Sold by all dealers in Mechanic's Tools.
THE HULL & BELDEN CO., MANUFACTURERS, Danbury, Conn.

SECRETARY WANTED—TO MANAGE THE WATERTOWN STEAM ENGINE COMPANY, at Watertown, N. Y. Address Co., giving business, experience, history, references, and salary expected. Oct. 20, 1876.

SETS OF DRAWING INSTRUMENTS 75 to $100. Drawing Materials of all kinds.
Levels, Compasses, Tape Measures; Aneroid Barometer from 1¾ inches to 6 inches in diameter.
Telescopes from $50 to $250 each.
Spy Glasses from $3 to $25 each.
Microscopes from $3 to $1,000.
Priced and Illustrated Catalogues, Part 1st, 84 pages, Mathematical. Catalogues, Part 2d, 120 pages, Optical Instruments. Sent on application.
JAMES W. QUEEN & CO., Opticians,
924 Chestnut St., Philadelphia, Pa.

J.M.CARPENTER
MANUFACTURER OF FIRST CLASS TAPS AND DIES, Pawtucket, R. I.

IRON PLANING MACHINES A SPECIALTY. C. WHITCOMB & CO., M'f'rs, Worcester, Mass.

BIG PAY to sell our RUBBER PRINTING STAMPS Terms free. TAYLOR & Co., Cleveland, O.

$200 a month. Outfit worth $1 free to agents. EXCELSIOR M'F'G Co., 151 Mich. Av., Chicago.

IMPROVED PAPER BOX MAKER'S PASTING MACHINES. WM. DRAPER, Philadelphia, Pa.

DO YOUR OWN PRINTING

FAVORITE Self-i'k'g Press $16
Presses from $3 to $125. Office complete $5 Send 6c for 75 page book of Presses, Type, Cuts, &c., illustrated with instructions, worth $1.
GORHAM & CO. BOSTON, MASS.

Todd & Rafferty Machine Co.
MANUFACTURERS OF
The celebrated Greene Variable Cut-Off Engine, Lowe's Patent Tubular and Flue Boilers, Plain Slide Valve Stationary, Hoisting, and Portable Engines. Boilers of all kinds. Steam Pumps, Mill Gearing, Shafting, &c., Silk, Tow Oakum, Bagging, Rope, Flax, and Hemp Machinery. Agents for the New Haven Manufacturing Co.'s Machinist's Tools, for Judson's Governors and Stop Valves, Sturtevant Blowers, and Differential Pulley-Blocks. WAREROOMS, 88 LIBERTY STREET, NEW YORK. WORKS, PATERSON, NEW JERSEY.

ELECTRIC BELLS, $3.50 TO $6.—AMATEUR Telegraph Outfits, $4. Sent C. O. D., with privilege of examining. Send stamp for circulars.
ROBINSON & DAY, Pittsfield, Mass.

TO RAILROAD MANAGERS & CAR BUILDERS—Complete Ventilation for railroad cars, street cars, and omnibuses, scientifically correct in principle, and mechanically very simple. Send for circular. Half the interest in the patent for Sale.
t C.G. VAN PAPPELENDAM, Charleston, Lee Co., Iowa.

WANTED—Salesmen on Salary only. $85.00 per month, and all traveling expenses, to sell goods of *our own manufacture* to dealers. No PEDDLING. Address NOVELTY M'F'G CO., Cincinnati, O.

ALLIS, BULLARD & CO., Limited,
Dealers in first class 2nd hand Machinery & Machinists' Supplies. Large Stock Tools in Store for immediate delivery. 14 Dey Street, New York.

IMPORTANT FOR ALL CORPORATIONS AND MANF'G. CONCERNS.—**Buerk's Watchman's Time Detector**, capable of accurately controlling the motion of a watchman or patrolman at the different stations of his beat. Send for circular.
J. E. BUERK, P. O. Box 979, Boston, Mass.
N. B.—The suit against Imhaeuser & Co., of New York was decided in my favor, June 10, 1874. Proceedings have been commenced against Imhaeuser & Co. for selling, contrary to the order of the Court. Persons using clocks infringing on my Patent, will be dealt with according to law.

MANUFACTURERS AND PATENTEES having useful articles, suitable for the Hardware Trade, and desiring aid to manufacture and introduce the same, address P. P. PRATT, care PRATT & Co., Buffalo, N. Y. Small samples may be sent, same to be returned if desired

© 1876 SCIENTIFIC AMERICAN, INC.

USEFUL BOOKS.

Beckett.—A Rudimentary Treatise on Clocks, and Watches, and Bells. 12mo.....$1.75

De Konnich.—Dietz. A Practical Manual of Chemical Analysis and Assaying, as applied to the Manufacture of Iron and its Ores, and to Cast Iron, Wrough Iron, and Steel. Edited by Fesquet. 12mo.....$2.5

Hughes.—A Treatise on Water Works for the Supply of Cities and Towns. 12mo.....$2.00

Hughes.—A Treatise on Gas Works and the Practice of Manufacturing and Distributing Gas. 12mo.$1.75

Kinsley.—Self-Instructor in Lumber Surveying.....$2.00

Kobell.—Erin. Mineralogy Simplified. A Short Method of Determining and Classifying Minerals, by means of Simple Chemical Experiments in the Wet Way. 12mo.....$2.50

Leffel.—The Construction of Mill Dams. Illustrated. 8vo.....$2.50

Neville.—Hydraulic Tables, Coefficients and Formulæ, for finding the Discharge of Water from Orifices, Notches, Weirs, Pipes, and Rivers. Thick 12mo...$7.00

Newbery.—Gleanings from Ornamental Art in every Style. Illustrated by 100 exquisitely drawn Plates. 4to.....$15.00

☞ The above or any of our books sent by mail, free of postage, at the publication price.

Our new and enlarged CATALOGUE OF PRACTICAL AND SCIENTIFIC BOOKS—96 pages, 8vo.—sent free to any one who will furnish his address.

☞ We are now receiving and keeping in stock the most important ENGLISH AND AMERICAN SCIENTIFIC Books as they are published.

HENRY CAREY BAIRD & CO.,
INDUSTRIAL PUBLISHERS, BOOKSELLERS AND IMPORTERS,
810 Walnut Street, Philadelphia.

TAKE NOTICE. We have the largest and best selling Stationery Package in the World. It contains 18 sheets of paper, 18 envelopes, pencil, penholder, golden pen, and a piece of valuable Jewelry. Complete sample package, with elegant gold-plated sleeve buttons, and ladies' fashionable fancy Set, pin and drops, post-paid, 25 cents. 5 packages, with assorted Jewelry, $1. *Solid Gold Patent Lever Watch* free to all agents.
BRIDE & CO., 769 Broadway, N. Y.

TO ELECTRO-PLATERS, JEWELERS, AND WATCHMAKERS.

BATTERIES, CHEMICALS, AND MATERIALS, in sets or single, with Books of Instruction for Nickel, Gold, and Silver Plating. THOMAS HALL, Manufacturing Electrician, 19 Bromfield Street, Boston, Mass Illustrated Catalogue sent free.

GEORGE C. HICKS & CO., Baltimore, Md.

CLAY RETORTS, TILES, FIRE BRICKS, &c.
☞ Terra Cotta Pipes of all sizes.

FOR SALE—VALUABLE PATENT RIGHTS of a Safety Screw Steam Platform Elevator and of a Bosom Starching Machine for Steam Laundries. Can be seen at the United States International Exposition. Also, one third interest in Pfautz's Steel Truss Extension or Flying Bridge. For full particulars, address
L. STERNBERGER, 503 Market St., Philadelphia, Pa.

FRICTION CLUTCHES AND ELEVATORS.
VOLNEY W. MASON & CO. PROV. R. I.

At Centennial Exhibition, Machinery Hall, D. 9, 66. Also at entrance to Pump Annex.

HOW TO MAKE SPIRAL SPRINGS. By Joshua Rose. With three engravings of the tools, which are easily made, and complete practical directions for working, including Hardening and Tempering. Price 10 cents. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. 20. To be had at this office and at all News Stores throughout the country.

LEHIGH EMERY WHEELS.

Send today for circular.
L. V. EMERY WHEEL CO., Weissport, Pa.

$50.00 SCREW-CUTTING FOOT LATHES—Foot Drill Presses. Send for Circular to
H. L. SHEPARD Cincinnati, O.

Gardiner's Pat. Centring & Squaring Attachment

R. L. STATE & CO., Springfield, Ohio.

WATER SUPPLY FOR TOWNS AND VILLAGES. By Clarence Delafield, C.E. A concise and valuable Report, showing the Cost and Merits of the Various Systems—Discussion of the Holly System, its Merits and Defects—The Reservoir System, with Pumps, Cost, and Advantages—Results Obtained and Economy of Use of Various Systems in Different Towns, with Names and Duty Realized, Facts and Figures to enable Town Committees to judge for themselves as to the system best suited for their wants—The Best Sources of Water Supply—Water-Bearing Rocks—Artesian Wells, their feasibility, excellence, and cost of boring—Importance of Pure Water—How Surface Water is Rendered Impure—Cost of Water Pipes, from 2 to 12 inches diameter, for Towns, including laying, all labor, materials, gates, joints, etc.—Estimates of Income and Water Rates for Supply of 1,000 Buildings. Price 10 cents. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 27. To be had at this Office and of all News Dealers.

$3 WATCHES. Cheapest in the known world. *Sample watch and outfit free to Agents.* For terms address COULTER & CO., Chicago

TOY NOVELTIES Wanted—Will buy or manufacture on royalty. Address HAWES BRO'S, Toy Novelty Turning Mills, Monroeton, Bradford Co., Pa.



MARINE PADDLE ENGINES and Boilers for driving Model Side Wheel Steamboats of from one to ten feet long; also Marine Screw Engines and Boilers for driving Row-Boats or Skiffs 16 feet and upward in length, either plain castings, partly finished or complete ready for use, so constructed that a speed of from six to twenty miles per hour can be easily obtained. The Engine can be quickly detached from the Yacht or Boat, and is then suitable for Agricultural, Domestic, Mechanical, Commercial or Amateur requirements, when small power only is needed. ☞ 100 Scroll Work Designs free on receipt of Stamp.
GEO. PARR, Buffalo, N. Y.

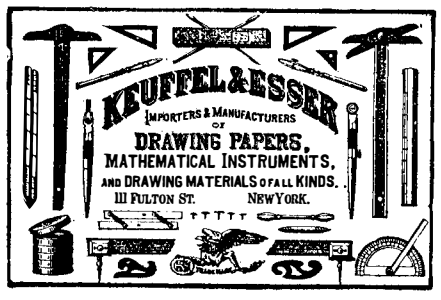

EAGLE FOOT LATHES,

With Scroll and Circular Saw Attachments, Slide Rest, Tools, &c.; also Small Engine Lathes, Metal Hand Planers, &c. Neatest designs, superior finish. **Low Prices.** Our new Catalogue describes these and every tool necessary for the Amateur or Artizan. Send for it.
WM. L. CHASE & CO.
95 & 97 Liberty St. New York.

OLIENE COMPOUND
A SUBSTITUTE FOR OIL. FOR LUBRICATING MACHINERY.
Will save 50 per cent. OLIENE COMPOUND CO., 48 Gold St., New York.

VINEGAR. HOW MADE IN 10 HOURS from Cider, Wine or Sorghum, *without using drugs.* Name paper, and address F. I. SAGE, Springfield, Mass.

ROSE-BUDS IN WINTER

Strong Pot Roses, specially prepared for fall planting and quick bloom, sent safely by mail, postpaid. Five splendid varieties, all labeled, for $1.00; 12 do. $2.00; 19 do. $3.00; 26 do. $4.00; 35 do. $5.00. For 10 cents each additional, one **Magnificent Premium Rose** to every dollar's worth ordered. Send for our new GUIDE TO ROSE-CULTURE, and choose from over 300 finest sorts. Address THE DINGEE & CONARD CO., ROSE-GROWERS, West Grove, Chester Co., Pa.

S. GUITERMAN, Export and Commission Merchant. 2 Fountain Court, Aldermanbury, London. New York Office, Guiterman Bros., 454 Broadway. Best of attention to introduce Merchandise, Patents, etc., in any part of Europe.

FOR SALE—In lots to suit, 2,000 worn out bright Gang Saws, at 4c. per lb.; 10,000 Files, suitable for re-cutting, at 6c. per lb.; also, all kinds of Scrap Iron and Steel. GILCHRIST & GRIFFITH, Mt. Pleasant, Iowa

BLAKE'S PATENT
Stone and Ore Breaker

Crushes all hard and Brittle Substances to **any required size.** Also, any kind of STONE for ROADS and for CONCRETE, &c.
Address BLAKE CRUSHER CO., New Haven, Conn.

FINE TOOLS AND FOOT LATHES.
Screw cutting and plain Foot Lathes. "Eureka" Foot Lathe, $15; Taps and Dies, Twist Drills, Chucks, Scroll Saws, Stubs' Tools and Steel. Send for complete Illustrated Catalogue. JACKSON & TYLER,
16 German St., Baltimore, Md.

WE ENAMEL in FINE JET BLACK every variety of turned wood work parts of machinery, castings, tinware and other metal work. ENAMELED JET GOODS, in wood or metal, made to order. AMERICAN ENAMEL CO. 11 WARREN ST. PROVIDENCE, R. I.

The Lehigh Emery Wheel

has given entire satisfaction, doing as much work in same time as any wheel of same grade I ever used, and lasting, by actual count of time and work, *three times as long.* SUP'T ROYERS FORD IRON FOUNDRY, Pa.
LEHIGH VALLEY EMERY WHEEL CO., Weissport, Pa.

Wood-Working Machinery,

Such as Woodworth Planing, Tongueing, and Grooving Machines, Daniel's Planers, Richardson's Patent Improved Tenon Machines, Mortising, Moulding, and Re-Saw Machines, and Wood-Working Machinery generally. Manufactured by
WITHERBY, RUGG & RICHARDSON,
26 Salisbury Street, Worcester, Mass.
(Shop formerly occupied by R. BALL & CO.)

SHAFTS, PULLEYS, HANGERS, COUPLINGS ETC.
In Stock, and for Sale by
WILLIAM SELLERS & CO.,
Philadelphia, and 79 Liberty St., New York.
Price lists and pamphlets on application.

$60 A WEEK Male or female. No capital. We give Steady work that will bring you $240 a month at home day or evening. Inventors's Union, 173 Greenwich Street, New York.



BRADFORD MILL CO.
Successors to Jas. Bradford & Co.
MANUFACTURERS OF
French Buhr Millstones,
Portable Corn & Flour Mills,
Smut Machines, etc.
Also, dealers in Bolting Cloths and General Mill Furnishing.
Office & Factory, 158 W. 2d St.
CINCINNATI, O.
J. R. Stewart, *Pres.* W. R. Dunlap, *Sec.*
☞ PRICE-LISTS SENT ON APPLICATION.

P. BLAISDELL & CO.,

Worcester, Mass.,
Manufacturers of the Blaisdell Patent Upright Drills and other first-class Machinist's Tools.

Steel Castings,

From ¼ to 10,000 lbs. weight. An invaluable substitute for expensive forgings, or for malleable iron castings requiring great strength. Send for circular and price list to CHESTER STEEL CASTING COMPANY, EVELINA STREET, PHILADELPHIA, PA.

Small Tools of all kinds; also GEAR WHEELS, parts of MODELS, and materials of all kinds. Castings of Small Lathes, Engines, Slide Rests, &c. Catalogues free. GOODNOW & WIGHTMAN, 23 Cornhill, Boston, Mass.

WOODWORTH SURFACE PLANERS $125. Planers and Matchers, $350. S. C. HILLS, 51 Courtland street, New York.

$250 a MONTH—Agents wanted everywhere. Business honorable and first class. Particulars sent free. Address J. WORTH & CO., St. Louis, Mo.

LOOK 20 Best Selling articles in the World. One Sample free, and an order good for $5.00. ATKINSON & CO., 2 Clinton Place, N. Y.

NO MONEY We will start you in a business you can make $50 a week without capital easy and respectable for either sex. Agents Supply Co., 261 Bowery, N. Y.

WHIPPLE'S Patent Door Knob.

Awarded a Bronze Medal at the American Institute Fair for 1874. The Judges say: "We consider this method of fastening DOOR KNOBS a great improvement over anything yet invented for the purpose, as it obviates the use of side screws and washers, and can be regulated to suit any thickness of Doors." Send for Circular.
THE PARKER & WHIPPLE COMPANY,
West Meriden, Conn., or 97 Chambers St., N. Y

STEAM PUMPS.

FIRST PRIZES, VIENNA, PARIS, NEW YORK, BALTIMORE, BOSTON.
Send for circular of recent patented improvements.
THE NORWALK IRON WORKS.
South Norwalk, Conn.

Last Chance.

Buy YOUR Tickets Now!!

DRAWING POSITIVELY
Thursday, Nov. 30th,
OR MONEY REFUNDED.

A Fortune for only $12.

THE *KENTUCKY CASH DISTRIBUTION CO.*, authorized by a special act of the Kentucky Legislature, for the benefit of the **Public Schools of Frankfort,** will have the First of their series of Grand Drawings at **MAJOR HALL,** in the **CITY OF FRANKFORT, KY.,** Thursday, Nov. 30, 1876, on which occasion they will distribute to the ticket holders the immense sum of

$600,000!

Thos. P. Porter, Ex-Gov. Ky., Gen'l Manager.
LIST OF GIFTS.

One Grand Cash Gift		$100,000
One Grand Cash Gift		50,000
One Grand Cash Gift		25,000
One Grand Cash Gift		20,000
One Grand Cash Gift		10,000
One Grand Cash Gift		5,000
50 Cash Gifts of	$1,000 each	50,000
100 Cash Gifts of	500 each	50,000
100 Cash Gifts of	400 each	40,000
100 Cash Gifts of	300 each	30,000
200 Cash Gifts of	200 each	40,000
600 Cash Gifts of	100 each	60,000
10,000 Cash Gifts of	12 each	120,000
Total, 11,156 Gifts, All Cash		600,000

PRICE OF TICKETS:
Whole tickets, $12; Halves, $6; Quarters, $3; 9 Tickets, $100, 27¼ Tickets, $300; 46¾ Tickets, $500; 95¾ Tickets, $1,000. 100,000 Tickets at $12 each.

The Hon. E. H. Taylor, Mayor of Frankfort, the entire Board of City Councilmen, the Hon. Alvin Duvall, late Chief Justice of Kentucky, and other distinguished citizens, together with such disinterested persons as the ticket holders present may designate, will superintend the drawing.

The payment of gifts to owners of prize tickets is assured. A bond, with heavy penalty and approved security, has been executed to the Commonwealth of Kentucky, which is now on record in Clerk's Office of County Court at Frankfort, *subject to inspection of any one.* This is a new feature, and will absolutely secure the payment of gifts.

Remittances can be made by Express, Draft, Post-office Money Order or Registered Letter, made payable to *KENTUCKY CASH DISTRIBUTION COMPANY.*

All communications, orders for Tickets, and applications for Agencies should be addressed to
HON. THOS. P. PORTER,
General Manager. Frankfort, Ky.
or **G. W. BARROW & CO.,**
General Eastern Agents, 710 Broadway, New York

"LEHIGH EMERY WHEELS have given us the greatest satisfaction." RATHBONE STOVE WORKS, Albany, N. Y. LEHIGH VALLEY EMERY WHEEL COMPANY, Weissport, N. Y.

SPARE THE CROTON & SAVE THE COST.
Driven or Tube Wells

furnished to large consumers of Croton and Ridgewood Water. WM. D. ANDREWS & BRO., 414 Water St., N. Y. who control the patent for Green's American Driven Well.

The Toll-Gate! Prize Picture sent free! An ingenious gem! 50 objects to find! Address, with stamp, E. C. ABBEY, Buffalo N. Y



Boult's Patent

Reverse Motion Paneling, Variety Moulding and Dovetailing Machine, cuts Panels of any design or style of mould in the solid wood with neatness and dispatch. Is a first class Shaper, Edge and Scroll Moulder Does genera Dovetailing with thick or thin stuffs. **Simple, Durable, and Efficient.**

☞ Send for Pamphlet and Sample of work.
Improved Solid Steel Cutters for all kinds of Variety Moulders made to order, and warranted by the
B. C. MACHINERY CO.,
Battle Creek, Mich.

IT PAYS to sell our Rubber Hand Printing Stamps Terms free G. A. HARPER & BRO., Cleveland, O.

Pond's Tools.

ENGINE LATHES, PLANERS, DRILLS, &c.
Send for Catalogue. DAVID W. POND, Successor to LUCIUS W. POND, Worcester, Mass.

MACHINERY OF EVERY DESCRIPTION,

COLD ROLLED SHAFTING, HANGERS, PULLEYS, COUPLINGS, BELTING, TANITE EMERY WHEELS AND GRINDERS, IN STOCK.
GEORGE PLACE,
121 Chambers & 103 Reade Sts., New York City.

Planing & Matching.

Moulding, Re-sawing, and Tenoning Machines. Scroll Saws and General Wood-Working Machinery.
JOHN B SCHENCK'S SONS' Matteawan, N. Y.
Send for Catalogue. 181 Liberty St., N. Y. city.

LEHIGH EMERY WHEELS.

Send today for circular.
L. V. E. W. CO., Weissport, Pa.

PATENT
COLD ROLLED SHAFTING.

The fact that this shafting has 75 per cent greater strength, a finer finish, and is truer to gage, than any other in use, renders it undoubtedly the most economical. We are also the sole manufacturers of the CELEBRATED COLLINS' PAT. COUPLING, and furnish Pulleys, Hangers, etc., of the most approved styles. Price list mailed on application to JONES & LAUGHLINS,
Try Street, 2nd and 3rd Avenues, Pittsburgh, Pa.
190 S. Canal Street, Chicago, Ill., and Milwaukie, Wis.
☞ Stocks of this shafting in store and for sale by
FULLER, DANA, & FITZ, Boston, Mass
GEO. PLACE & CO., 121 Chambers St., N. Y.

REVERSIBLE HOISTING ENGINE

FOR ALL PURPOSES.
☞ Cheap, simple, durable, and effective.
LIDGERWOOD M'F'G CO., 165 Pearl St. N. Y

OTIS' SAFETY HOISTING Machinery.

OTIS, BROS. & CO.
No. 348 BROADWAY, NEW YORK

The Lehigh Emery Wheel. "The best wheel we have ever had Gives our sawer perfect satisfaction." HARRISBURG CAR CO.
LEHIGH VALLEY EMERY WHEEL CO., Weissport, Pa.

MACHINERY OF IMPROVED STYLES FOR making SHINGLES, HEADING, and STAVES; also GUAGE LATHES for TURNING HANDLES. Sole makers of Laws Pat. Shingle and Heading Sawing Machine. Address TREVOR & CO., Lockport N. Y.

The HOADLEY PORTABLE STEAM ENGINE.
WITH AUTOMATICAL CUT-OFF REGULATOR AND BALANCED VALVE.
THE BEST & MOST ECONOMICAL ENGINE MADE
SEND FOR CIRCULAR.
The J. C. HOADLEY CO. LAWRENCE, MASS.
STATE WHERE YOU SAW THIS.

STEAM ENGINES FOR SALE

I offer the following very superior Todd & Rafferty Engines for sale at greatly reduced prices: One 18x36, one 14x18 (sawmill), one 12x14, one 11x24, one 10x24, one 9x20, one 7x16, one 5x10 on legs, one 8x12, portable one 8x16, double hoisting; all first class and entirely new. Also various sizes and kinds of Boilers. I will also furnish specifications and estimates for all kinds of rope and bagging machinery. Send for descriptive circular and price
Address J. C. TODD.
10 Barclay St., New York, or Paterson, N. J.

HARVARD UNIVERSITY DENTAL SCHOOL. The next year of this school begins under the new plan, Sept. 28, 1876, and ends June 27, 1877, with a recess of one week at Christmas and another in February. The teaching is consecutive through a course of two years, the instruction of one year not being repeated in the next; that of the first year being identical with that of the Harvard Medical School and by the same Professors. By this plan, the amount of instruction given is double that of any other strictly dental school, and at slightly increased cost. For information, address THOMAS H. CHANDLER, Dean, 222 Tremont Street, Boston, Mass

WROUGHT IRON BEAMS & GIRDERS

THE UNION IRON MILLS, Pittsburgh, Pa.—The attention of Engineers and Architects is called to our improved Wrought-Iron Beams and Girders (patented), in which the compound welds between the stem and flanges, which have proved so objectionable in the old mode of manufacturing, are entirely avoided. We are prepared to furnish all sizes at terms as favorable as can be obtained elsewhere. For descriptive lithograph, address Carnegie Brothers & Co., Union Iron Mills, Pittsburgh, Pa.

[ESTABLISHED 1846.]

Munn & Co.'s Patent Offices.

The Oldest Agency for Soliciting Patents in the United States.

THIRTY YEARS' EXPERIENCE.

MORE PATENTS have been secured through this agency, at home and abroad, than through any other in the world.

They employ as their assistants a corps of the most experienced men as examiners, specification writers, and draftsmen that can be found, many of whom have been selected from the ranks of the Patent Office.

SIXTY THOUSAND inventors have availed themselves of Munn & Co.'s services in examining their inventions and procuring their patents.

MUNN & CO., in connection with the publication of the SCIENTIFIC AMERICAN, continue to examine inventions, confer with inventors, prepare drawings, specifications, and assignments, attend to filing applications in the Patent Office, paying the government fees, and watch each case step by step while pending before the examiner. This is done through their branch office, corner F and 7th streets, Washington. They also prepare and file caveats, procure design patents, trademarks, and reissues, attend to rejected cases (prepared by the inventor or other attorneys), procure copyrights, attend to interferences, give written opinions on matters of infringement, furnish copies of patents, and, in fact, attend to every branch of patent business both in this and in foreign countries.

A special notice is made in the SCIENTIFIC AMERICAN of all inventions patented through this agency, with the name and residence of the patentee. Patents are often sold, in part or whole, to persons attracted to the invention by such notice.

Patents obtained in Canada, England, France, Belgium, Germany, Russia, Prussia, Spain, Portugal, the British Colonies, and all other countries where patents are granted, at prices greatly reduced from former rates. Send for pamphlet pertaining specially to foreign patents, which states the cost, time granted, and the requirements for each country.

Copies of Patents.

Persons desiring any patent issued from 1836 to November 26, 1867, can be supplied with official copies at reasonable cost, the price depending upon the extent of drawings and length of specifications.

Any patent issued since November 27, 1867, at which time the Patent Office commenced printing the drawings and specifications, may be had by remitting to this office $1.

A copy of the claims of any patent issued since 1836 will be furnished for $1.

When ordering copies, please to remit for the same as above, and state name of patentee, title of invention, and date of patent.

A pamphlet containing full directions for obtaining United States patents sent free. A handsomely bound Reference Book, gilt edges, contains 140 pages and many engravings and tables important to every patentee and mechanic, and is a useful handbook of reference for everybody. Price 25 cents, mailed free.
Address
MUNN & CO.,
Publishers SCIENTIFIC AMERICAN,
37 Park Row, N. Y.
BRANCH OFFICE—Corner of F and 7th streets Washington, D. C.

© 1876 SCIENTIFIC AMERICAN, INC.

Advertisements.

Back Page - - - - - - - - - $1.00 a line.
Inside Page - - - - - - - - 75 cents a line.
Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Friday morning to appear in next issue.

THE ENGINEER'S FRIEND.

Few men realize the constant care and watchfulness required of Engineers where even speed is required. No invention within the last 20 years has done so much to relieve all engineers of labor, care, and trouble as that of the ALLEN GOVERNOR. Engines with our governor always run with a wide open throttle and keep the same speed, whether the steam is 40 pounds or 80 pounds, as long as it is sufficient to do the work. Within three months, we have received letters of inquiry from nearly two thousand engineers, many of whom have caused our governors to be attached, and all have been pleased. This governor is simple in construction, inexpensive, not liable to get out of order, permits the speed of the engine to be changed at will; is neat in appearance, noiseless, very durable, saves the engineer's time, saves fuel, and is at once the most powerful and most sensitive governor ever made.

LARGEST NAIL FACTORY IN PENN'A.
CHESAPEAKE NAILWORKS, Harrisburg, Pa., July 21, 1876.
MR. S. B. ALLEN: The "Allen Governor" which we have had on our factory engine since the first of April last, has worked to our entire satisfaction. Since beginning its use, our product has been INCREASED FOUR HUNDRED KEGS PER WEEK, and we recommend it to those seeking a reliable governor.
CHARLES L. BAILEY & CO., Proprietors.

ALREADY SAVED ITS COST IN FUEL.
W. P. EMERSON PIANO CO., Boston, Sept. 20, 1876.
S. B. ALLEN: Permit me to express my entire satisfaction in the working of the Allen Governor, purchased last spring. It has already saved its cost in fuel, and is all I could ask for. It works quietly, and is exceedingly susceptible to the least variation in power, keeping even speed always. W. MOORE, Proprietor.

PERFORMS ADMIRABLY—EXACT SPEED.
NEW ORLEANS MACHINERY DEPOT, Sept. 23, 1876.
S. B ALLEN: The Allen Governor on our Factory Engine performs admirably, holding the engine to the exact speed desired under the ever varying load of driving a large number of wood working machines—always with an open throttle-valve, requiring no attention from the engineer. The fact that we have this summer purchased thirteen Allen Governors for our customers is the best recommendation we can give.
C. B. CHURCHILL, Manager.

NOT VARIED ONE REVOLUTION in 3 YEARS.
WINCHESTER MASS, Nov. 17, 1875.
We have used the Allen Governor on our 50-horse-power engine for over three years. Our engine drives a bark-mill, and all other machinery incident to a large tannery. Our work is variable, but the engine has run with perfect steadiness with the starting valve wide open, and has never varied over one revolution all these three years. The Governor works as well now as when first attached, and we believe it to be the best Governor in the world. P. WALDMEYER & CO.

WORTH A THOUSAND DOLLARS A YEAR.
PLAINVILLE M'F'G CO., Plainville, Conn., May 29, 1876.
S. B. ALLEN: I read an account of the "Allen Governor" in the *Scientific American*, and desire to tell you what I think of it. Your governor was attached to our large engine seven months ago. It has done more than was claimed for it. It has saved about twenty per cent of our coal, and added greatly to our power. We thought a larger engine would be necessary to run our new machinery, and had partly contracted for one, but now we have plenty of power. The agent says you have saved us the price of a new engine. I think your governor is worth a thousand dollars a year to our Company. They would not part with it for that sum. I have run an engine since 1848, and never saw a governor which will regulate a steam engine like yours. W. B. REYNOLDS, Engineer of Plainville M'f'g Co.

Flour Mills require regular, exact motion. This governor enables them to make more and better flour.
Rolling Mills and **Machine Shops** save the value of the governor every month by the steady motion which we alone can give. **Lumber Mills** run with increased and steadier speed, and everywhere praise our governor. **Cotton Mills** and **Woolen Mills** have in some instances increased their whole production from 3 to 10 per cent by using our governor—and **all parties** save largely in fuel. About 1,000 of our governors are in use, and a large proportion of the parties would not part with them for ten times their cost.
We will be glad to send illustrated, descriptive circulars to all inquirers. We want a good agent to sell these governors in all cities and towns where we have not one now. If you run or own an engine and don't want a new governor, it might be well to know what improvements are being made. Every intelligent engineer should understand our governor. All parties west of the Rocky Mountains may address GODDARD & CO., Pacific Iron Works, SAN FRANCISCO; those in the Southern States may send to THE NEW ORLEANS MACHINERY DEPOT, 166 Gravier St., New Orleans. All others may write to
THE ALLEN GOVERNOR CO., Boston, Mass.

BLOSSOM ROCK, HARBOR OF SAN FRANCISCO. Full Account of its Removal, Method and Cost. By Col. R. S. Williamson. With 25 illustrations, diagrams, &c. Presenting valuable information for engineers. Price 10 cents. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 24. To be had at this Office and of all News Dealers.

THE BEST
AND MOST ECONOMICAL
Boiler Feeder
IS
FRIEDMANN'S INJECTOR,
MANUFACTURED BY
NATHAN & DREYFUS, New York.
108 Liberty St.
—:o:—
Send for Circular.

COMPRESSED AIR MOTIVE POWER.—For particulars of the most recent practice, send 20 cents for SCIENTIFIC AMERICAN SUPPLEMENT, Nos. 1 and 2, containing 5 engravings of the "Compressed Air" Locomotives now in use in St. Gothard Tunnel Works, with dimensions, etc.

Lathes, Planers, Shapers, Drills,
Gear & Bolt Cutters, &c. E. GOULD, Newark, N.J.

Portland and Keene's Cement.
From the best London Manufacturers. For sale by JAMES BRAND, 85 Beekman St., New York.
A Practical Treatise on Cement furnished for 25 cents.

IRON BRIDGE BUILDING—A complete description, with dimensions, working drawings, and prespectives of Girard Avenue Bridge, Philadelphia, Pa. With foundations of piers. Ten engravings. Price 30 cents. Contained in Nos. 1, 2, and 4 of SCIENTIFIC AMERICAN SUPPLEMENT, 10 cents per copy. To be had at this office and of all news agents.

NON-COMBUSTIBLE STEAM BOILER & PIPE
COVERING
WITH "AIR SPACE" IMPROVEMENT.
Saves 10 to 20 per cent. CHALMERS SPENCE CO., Foot E. 9th St., N. Y.; 1202 N. 2nd St., St. Louis, Mo.

PROFESSOR HUXLEY IN AMERICA.—Full reports of the three great lectures recently delivered in New York by Professor Huxley on "The Theory of Evolution" are given in the SCIENTIFIC AMERICAN SUPPLEMENTS Nos. 41, 42, 44. Price 10 cents each, 30 cents for the three. Sold by all news dealers. Sent by mail, from SCIENTIFIC AMERICAN Office, on receipt of the price. These are the only scientific lectures delivered in America by Professor Huxley.

NEW METHOD OF ENGRAVING
Moss' Process.
Photo Engraving Co.
67 Park Place, New York.
(Formerly at 62 Cortlandt Street, New-York.)
L. SMITH HOBART, Pres't. JOHN C. MOSS, Sup't. D. I. CARSON, Gen. Ag't.
Relief Plates in Hard Type-Metal
An excellent SUBSTITUTE for WOOD CUTS
For Printing all sorts of ILLUSTRATIONS, at much LOWER PRICES.
Used by the principal PUBLISHERS & MANUFACTURERS throughout the country.
Send Stamp for New Illustrated Circular. Please say where you saw this.

WANTED—NEW OR SECOND HAND MACHINE TOOLS.
4—18 in. Swing Screw Cutting Engine Lathes.
1—34 " " " " " "
1—20 " " Chuck Lathe.
1—40 " " " " Drop Bed & Hollow Spindle.
1—8 ft. Planer.
1— Milling Machine, adapted for cutting Key Seats in Shafting.
1— Cutting-off Machine for Shafting.
3— Lever Drill Presses.
1— Bolt Cutter.
1— Sturtevant Blower for Cupola, Capacity 5 tuns.
1— " " Small.
1— Heavy Emery Wheel Frame, Double.
1— Punching and Shearing Machine to shear 1 in. Iron.
1— Centering Machine.
1— Band Saw.
1— Tenoning Machine.
1— Shaping Machine.
1— Wood Planer (Wood's style).
1— Turning Lathe.
1— Gauge Lathe.
1— Resawing Machine.
1— Wood Turning Lathe.
1— Carriage Saw.
1— Cut-Off Sawing Machine.
1— Vertical Gang Boring Machine.
1— Horizontal Boring Machine, Sliding Spindle.
1— Universal Wood Worker.
4— Grind Stone Iron Frames.
2— Safety Elevators, capacity 1 tun each.
We solicit propositions for the above tools, or equivalent, with the maker's name.
MINNEAPOLIS HARVESTER WORKS, Minnesota.

H. W. JOHNS' PATENT.
ASBESTOS
MATERIALS.
ASBESTOS ROOFING.
The only reliable substitute for tin, at about one-half its cost, finished with white Fire-Proof Coating, suitable for steep or flat roofs. In rolls ready for use. Easily applied by any one.
ASBESTOS PAINTS.
All shades, ready mixed, superior body, rich colors, for general purposes; the most durable and economical protective coverings for exposed wood and iron. In pails, kegs and barrels.
ASBESTOS STEAM-PIPE AND BOILER COVERINGS.
The cheapest, most durable and effective non-conductors in use—proved superior to all others in U. S. government tests—a perfect insulator for hair felts, rendering them indestructible.
ASBESTOS STEAM PACKING.
Indestructible, self-lubricating, flat, and round, all sizes.
Fire-Proof Paints and Coatings, Cements for Steam-Joints, Acid and Gas Retorts, Leaky Roofs, &c. Roof Paint, Sheathing and Lining Felts.
Asbestos Boards, Paper, Thread, Cloth, &c.
These articles are ready for use, and can be easily applied by any one. Send for Samples, Pamphlets, Price Lists, etc.
H. W. JOHNS, 87 Maiden Lane, N.Y.,
Patentee and Manufacturer, Established 1858.

Pyrometers, For showing heat of Ovens, Hot Blast Pipes, Boiler Flues, Super-Heated Steam, Oil Stills, &c.
HENRY W. BULKLEY, Sole Manufacturer.
149 Broadway, New York.

HOW TO BUILD CHEAP BOATS. By Paddlefast. A series of articles showing how any person may build a boat, with economy. Each article is accompanied by drawings and diagrams, with minute directions, dimensions, &c.
No. 1. The Three-Dollar Scow.—Directions for construction, with 7 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 25. Price 10 cts.
No. 2. The Five-Dollar Rowing Skiff.—With full directions for construction. 13 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 26.
No. 3. A Fourteen-Dollar Sailing Skiff.—With 14 illustration. Full directions for construction of boat, center board, rudder, mast, sail, etc. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 29. Price 10 cents.
No. 4. A Twelve-Dollar Row Boat.—14 illustrations. Illustrates the construction of a graceful ribbed boat, light weight. Shows the method of securing good lines, how to bend and arrange the ribs, dimensions of all the parts, and directions for construction in full. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 30.
All the above numbers of Supplement to be had at this Office and of all News Dealers.

$55 to $77 a Week to Agents. Samples FREE. P. O. VICKERY, Augusta, Maine.

Machinists' Tools.
NEW and IMPROVED PATTERNS.
Send for new illustrated catalogue.
Lathes, Planers, Drills, &c.
NEW HAVEN MANUFACTURING CO.
New Haven, Conn.

ROCK DRILLING MACHINES AND AIR COMPRESSORS.
MANUFACTURED BY BURLEIGH ROCK DRILL CO.
SEND FOR PAMPHLET. FITCHBURG, MASS.


WOOD & LIGHT Machine Co.
WORCESTER, MASS.
Manufacture all kinds of
Iron-Working Machinery,
including many novelties.
Shafting, Pulleys, &c.
Send for Circulars.

PERFECT
NEWSPAPER FILE.
—:o:—
The Koch Patent File, for preserving newspapers, magazines, and pamphlets, has been recently improved and price reduced. Subscribers to the SCIENTIFIC AMERICAN and SCIENTIFIC AMERICAN SUPPLEMENT can be supplied for the low price of $1.50 by mail, or $1.25 at the office of this paper. Heavy board sides; inscription "SCIENTIFIC AMERICAN," in gilt. Necessary for every one who wishes to preserve the paper.
Address
MUNN & CO.,
Publishers SCIENTIFIC AMERICAN.

The Scientific American REFERENCE BOOK.
A Bound Book of 144 Pages, for 25c.

On receipt of 25 cents, we send by mail, post paid, a copy of a handsome little bound volume entitled the SCIENTIFIC AMERICAN REFERENCE BOOK, containing 144 pages illustrated with engravings, and forming one of the cheapest and most valuable books of condensed reference ever printed. Among its contents are:

1. **The Census of the United States,** by States, Territories, and Counties, *in full*, showing also the area of the several States.
2. **Table of Occupations.**—Showing the principal occupations of the people of the United States, and the number of persons engaged in each occupation. Compiled from the last Census.
Table of Cities having over 10,000 inhabitants—Compiled from the last Census.
3. **The Patent Laws** of the United States in full. With Directions How to Obtain Patents, Official Rules, Costs, etc.; Forms for Applications for Patents and Caveats; Forms for Assignments, in whole and part; Licences; State, Town, County, and Shop Rights; Directions How to Introduce and Sell Inventions; General Principles applicable to Infringements; Synopsis of the Patent Laws of Foreign Countries, Costs, Procedure, Rights of Employers and Employees in respect to Inventions; State Laws concerning Patents.
4. **United States Trade Mark Registration,** showing the Trade Mark Law in full, with Directions for Registering Trade Marks, Costs, etc.
5. **United States Copyright Law for Labels,** in full. With Directions, Expenses, etc.
6. **The Principal Mechanical Movements.** Described and illustrated by 150 small diagrams, of great value to Inventors and Designers of Mechanism.
7. **Geometry,** as Applied to Practical Purposes. With illustrations.
8. **The Modern Steam Engine.**—With engraving, showing all the parts, names, etc., and a brief history of the Invention and Progress of Steam Power.
9. **Horse Power.**—Simple and plain rules for Calculating the Horse Power of Steam Engines and Streams of Water.
10. **Knots.**—Presenting engravings of 48 different kinds of Rope Knots, with explanations as to tying
11. **Tables of Weights and Measures.**—Troy Weight; Apothecaries' Weight; Avoirdupois, or Commercial Weight; French Weights; United States Standard; Dry Measure; Land Measure; Cubic Measure; Liquid Measure; French Square Measure; French Cubic, or Solid Measure; Measuring Land by Weight, with engraving of a section of the English, and a section of the French rule, of equal length
12. **Valuable Tables:**
(1) Table of the Velocity and Force of the Wind.
(2) Table of the Specific Gravity and Weight per Cubic Foot and Cubic Inch, of the principal substances used in the Arts.
(3) Table of the Heat-Conducting Power of various Metals and other Solids and Liquids.
(4) Table of the Mineral Constituents absorbed or removed from the Soil, per acre, by different crops.
(5) Table of Steam Pressures and Temperatures.
(6) Table of the Effects of Heat upon various bodies, melting points, etc.
13. **Miscellaneous Information.**—Force of Expansion by Heat; small Steamboats, proper dimensions of engines, boilers, propellers, boats; Incubation, Temperature of; To Make Tracing Paper; Constituents of various Substances; Friction, how produced, and Rules for Calculation; Specific Heat Explained; Specific Gravity of Liquids, Solids, Air, and Gases; Gunpowder—Pressure, Heat, and Horse Power of; Copying Ink, to Make; Heat, its mechanical equivalent explained; Molecules of Matter, size and motion explained; Lightning and Lightning Rods—valuable information Value of Drainage Explained; Amount of Power at present Yielded from Coal by best Engines; Sound—its velocity and action; Liquid Glues, Recipes; Value of Brains; Properties of Charcoal; Hight of Waves; Speed of Electric Spark, etc.; Valuable Recipes.

The SCIENTIFIC AMERICAN REFERENCE BOOK. Price only 25 cents, may be had of News Agents in all parts of the country, and of the undersigned. Sent by mail on receipt of the price.

MUNN & CO., Publishers,
Scientific American Office,
37 Park Row, New York.

Stone Channeling
OR
Quarrying Machine,

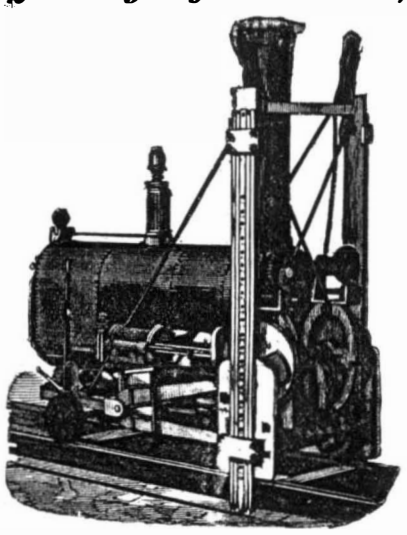
WARDWELL PATENT.
FOR CUTTING STONE INTO VARIOUS SIZES AND DIMENSIONS IN ALL KINDS OF QUARRIES.
STEAM STONE CUTTER CO., RUTLAND, VT.
SOLE PROPRIETORS AND MANUFACTURERS.
Three Machines at Philadelphia Exhibition, Annexe No. 2, Machinery Hall.

PORTLAND CEMENT
ROMAN & KEENE'S. For Walks, Cisterns, Foundations, Stables, Cellars, Bridges, Reservoirs, Breweries, etc.
Remit 10 cents for Practical Treatise on Cements.
S. L. MERCHANT & Co., 76 South St., New York.

NOYE'S
Mill Furnishing Works
are the largest in the United States. They make Burr Millstones, Portable Mills, Smut Machines, Packers, Mill Picks, Water Wheels, Pulleys and Gearing, specially adapted to flour mills. Send for Catalogue.
J. T. NOYE & SON, Buffalo, N. Y.

THE NEW FIFTY DOLLAR BACK GEAR, SCREW CUTTING FOOT LATHE. Send for circular to POST & CO., Cincinnati.

Niagara Steam Pump Works
ESTABLISHED 1826.
CHARLES B. HARDICK,
No. 23 Adams Street.
BROOKLYN, N. Y.

The Tanite Co.,
STROUDSBURG, PA.
EMERY WHEELS & GRINDERS
GEO. PLACE, Gen'l. Agent for N. Y. city and State.

BOGARDUS' PATENT UNIVERSAL ECCENTRIC MILLS—For grinding Bones, Ores, Sand, Old Crucibles, Fire Clay, Guanos, Oil Cake, Feed, Corn, Corn and Cob, Tobacco, Snuff, Sugar, Salts, Roots, Spices, Coffee, Cocoanut, Flaxseed, Asbestos, Mica etc., and whatever cannot be ground by other mills. Also for Paints, Printers' Inks, Paste Blacking, etc. JOHN W. THOMSON, successor to JAMES BOGARDUS, corner of White and Elm Sts., New York.

M. SELIG JUNIOR, & CO.,
Importers of American Machinery, Tools, Agricultural Implements, Wholesale and Export Hardware and Machinery Merchants. Est'd 1866.
LONDON, ENGLAND, and BERLIN, GERMANY.



and Shaped Diamond Carbon Points, indispensable for Trueing Emery Wheels, Grindstones, Hardened Steel and Paper Calender Rollers. Drilling, Planing, Moulding and sawing stone. J. DICKINSON, 64 Nassau St., N.Y.

DAMPER REGULATORS **BEST** AND LEVERS GAGE COCKS.
MURRILL & KEIZER, 44 Holliday St., Balt.

HARTFORD
STEAM BOILER
Inspection & Insurance
COMPANY.
W. B. FRANKLIN, V. Pres't. J. M. ALLEN, Pres't.
J. B. PIERCE, Sec'y.

PUNCHING AND DROP PRESSES. For the **Best** and **Cheapest**, address THE STILES & PARKER PRESS CO., MIDDLETOWN, CONN.

PROSPECTUS
OF THE
SCIENTIFIC AMERICAN, For 1877.
THE MOST POPULAR SCIENTIFIC PAPER IN THE WORLD.
THIRTY-SECOND YEAR.
VOLUME XXXVI.—NEW SERIES.

The publishers of the SCIENTIFIC AMERICAN beg to announce that on the first day of January, 1877, a new volume commences. It will continue to be the aim of the publishers to render the contents of the new volume more attractive and useful than any of its predecessors.
To the Mechanic and Manufacturer.
No person engaged in any of the mechanical pursuits should think of doing without the SCIENTIFIC AMERICAN. Every number contains from six to ten engravings of new machines and inventions which cannot be found in any other publication.
The SCIENTIFIC AMERICAN is devoted to the interests of Popular Science, the Mechanic Arts, Manufactures, Inventions, Agriculture, Commerce and the industrial pursuits generally; and it is valuable and instructive not only in the Workshop and Manufactory, but also in the Household, the Library, and the Reading Room. Each volume contains hundreds of Notes, Receipts, and Suggestions and Advice, by Practical Writers, for Working Men and Employers, in all the various arts.
TERMS OF SUBSCRIPTION.
One copy of the SCIENTIFIC AMERICAN will be sent for *one year*, 52 numbers, POSTAGE PREPAID, to any subscriber in the United States or Canada, on receipt of *three dollars and twenty cents* by the publishers.
One extra copy of the SCIENTIFIC AMERICAN will be supplied gratis *for every club of five subscribers* at $3.20 each; or six copies for $16.50 without extra copy. Postage free.
The Scientific American Supplement.
A weekly paper, uniform in size with the SCIENTIFIC AMERICAN, but a distinct publication. It contains working drawings of engineering works, and elaborate treatises on every branch of Science and Mechanics, by eminent writers, at home and abroad. An illustrated cover protects the handsomely printed sheets. Price, $5.00 per annum. Single copies 10 cents.
One copy of the SCIENTIFIC AMERICAN *and one copy of the* SCIENTIFIC AMERICAN SUPPLEMENT will be sent for one year, postage prepaid, to any subscriber in the United States or Canada, on receipt of *seven Dollars* by the publishers.
The safest way to remit is by Postal-Order, Draft, or Express. Money carefully placed inside of envelopes, securely sealed, and carefully addressed, seldom goes astray; but it is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to
MUNN & CO.,
37 PARK ROW, NEW YORK

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO'S INK. Tenth and Lombard Sts., Philadelphia, and 59 Gold St., New York.

© 1876 SCIENTIFIC AMERICAN, INC.